SKIJOLA


13 GENERAL CATALOGUE 13


圆头锁 Cam Lock


SK1-003



[SK1-003]


[SK1-003-2]










[SK1-003-2-3]



开孔尺寸
Opening Size

特点

- 外观小巧，实用方便
- 钥匙开启和关闭有良好的回馈性
- 左右兼用型

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：本体镀亮铬、锁片镀锌
用　途　小型机箱、机柜、配电箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 配两个钥匙

Features
- Small and exquisite, easy to use
- Open and close with good feedback
- Suitable for left and right side opening

Specification
- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Body: Bright Chrome Plated
  Pawl: Zinc Plated

Application
- Mini chassis cabinet, Equipment cabinet, Distribution box

Date of delivery
- Common product inquiry is welcome

Remark
- With two keys

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)	钥匙 key
SK1-003	●	2D	43	不通开钥匙 Independent key
SK1-003-2	●	2D	42.5	通开钥匙 Master key

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

信箱锁 Cam Lock


SK1-005


[SK1-005-1]


[SK1-005-2]



[SK1-005-3]


[SK1-005-4]





开孔尺寸
Opening Size



特点

- 锁片处带有勾槽，可以牢固地勾住门板
- 四种锁体长度规格可供选择
- 外观小巧，实用方便

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：本体镀亮铬，锁片镀锌
用　途 ● 控制箱、电力箱、机箱机柜、信箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 配通开钥匙

Features
- With groove in the pawl can hold the door panel tightly
- Four lock body specifications can be chosen
- Small and exquisite, easy to use

Specification
- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Body: Bright Chrome Plated
  Pawl: Zinc Plated

Application
- Control box,Power box,Equipment cabinet,Mailbox

Date of delivery
- Common product inquiry is welcome

Remark
- Master key

订货号 Item No.	RoHS	2D	H1	H2	重量(g) Weight:(g)	钥匙 key
SK1-005-1	●	2D	26	17	45	通开钥匙 Master key
SK1-005-2	●	2D	28.5	20	47	
SK1-005-3	●	2D	33.5	25	51	
SK1-005-4	●	2D	39	29.5	55	

● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


信箱锁 Cam Lock


SK1-006



[SK1-006-1]


[SK1-006-2]












开孔尺寸
Opening Size



开孔尺寸
Opening Size

特点

- 锁片处带有勾槽，可以牢固地勾住门板
- 两种锁体规格可供选择
- 外观小巧，实用方便

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：本体镀亮铬，锁片镀锌
用　途 ● 控制箱、电力箱、机箱机柜、信箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 锁体表面为橘皮纹处理

Features
- With groove in the pawl can hold the door panel tightly
- Two lock body specifications can be chosen
- Small and exquisite, easy to use

Specification
- Material: Zinc Alloy(ZDC), Cold Rolled Sheet(SPCC)
- Finish: Body: Bright Chrome Plated
  Pawl: Zinc Plated

Application
- Control box, Power box, Equipment cabinet, Mailbox

Date of delivery
- Common product inquiry is welcome

Remark
- Orange peel grain surface treatment of lock body

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)	钥匙 key
SK1-006-1	●	2D	48	不通开钥匙 Independent key
SK1-006-2	●	2D	42	

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


转舌门锁 Cam Lock


SK1-010


[SK1-010]



[SK1-012]



可选配件：B-1602
Optional accessory:B-1602







钥匙另购买，仅SK1-012使用
Key needs to be purchased separately
[1-063-2DD]





开孔尺寸
Opening Size



锁片形式
Pawl Type

特点

- 锁芯上配有防水圈，起到防水和阻尼功能
- 可配两种锁片，每种锁片有横、竖安装孔，用于不同方式的安装
- 左右兼用型，适合各种门板厚度

规　格 ● 材　　质：尼龙(PA)、锌合金(ZDC)
　　● 表面处理：黑色、镀亮铬
用　途 ● 小型机箱、机柜、配电箱、特种设备
交货期 ● 常规产品. . .敬请垂询
备　注 ● 具有良好迫紧功能，开、闭时回馈良好
　　● 钥匙需另购，SK1-012用1-063-2DD钥匙

Features
- Waterproof rings in the key cylinder with water proof and damping performance
- Suitable for left and right side opening, suit for different door thickness
- With two pawls, each pawl has different install way

Specification
- Material: Nylon(PA), Zinc Alloy(ZDC)
- Finish: Black, Bright Chrome Plated

Application
- Mini chassis cabinet, Distribution box, Special equipment

Date of delivery
- Common product inquiry is welcome

Remark
- With strong compression force, and good feedback to open and close
- Keys need to be purchased separately

订货号 Item No.	RoHS	2D	锁芯 Cylinder	H1		H2		重量(g) Weight:(g)
				#21	#22	#21	#22	
SK1-010	●	2D	90°	19.5-23.5	14-18	29.5-33.5	35-39	40
SK1-012	●	2D	180°	19.5-23.5	14-18	29.5-33.5	35-39	47

● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock

SK1-013



[SK1-013]


钥匙另购买
Key needs to be purchased separately
[1-063-3]





开孔尺寸
Opening Size



特点

- 锁芯带防尘盖
- 配有密封防水胶垫

规　格 ● 材　　质：锌合金(ZDC)
● 表面处理：镀亮铬
● 适用门板厚度：1-3mm
用　途 ● 机柜、自动售货机、娱乐设备
交货期 ● 常规产品. . .敬请垂询
备　注 ● 两种锁片可选，可改装成天地锁
● 钥匙需要另外购买，配1-063-3钥匙

Features
- Cylinder with dust proof cover
- With sealing waterproof gasket

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated
- Suitable door panel thickness:1-3mm

Application
- Equipment cabinet,Vending machine,Entertainment equipment

Date of delivery
- Common product inquiry is welcome

Remark
- Two pawls can be choose, also can refit to multi-point lock
- Keys need to be purchased separately

订货号 Item No.		重量(g) Weight:(g)
SK1-013	2D	84
1-063-3	2D	49


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

转舌迫紧门锁 Cam Lock


SK1-016


[SK1-016-3B-2]



[SK1-016-3W-2]







开孔尺寸
Opening Size



特点

- 具有伸缩式迫紧功能，适合不同止口高度
- 钥匙开启的旋转回馈性良好

规　格 ● 材　　质：锌合金(ZDC)
● 表面处理：镀亮铬或烤漆黑色
● 用钥匙旋转开启
用　途 ● 小型机箱、机柜、配电箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 开启简单，具有良好的迫紧锁定功能

Features
- With forced telescopic function, suitable for different spigot height
- Open with good rotation feedback

Specification
- Material: Zinc Alloy(ZDC)
- Finish: body: Bright Chrome Plated or Black Painted
- Rotate and open with key

Application
- Mini chassis cabinet, Equipment cabinet, Distribution box

Date of delivery
- Common product inquiry is welcome

Remark
- Easy to open, with great latching function

订货号 Item No.			颜色 Color	重量(g) Weight:(g)
SK1-016-3B-2	●	2D	黑色 Black	113
SK1-016-3W-2	●	2D	亮色 Bright	100

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


面板锁 Cam Lock


SK1-017



[SK1-017]


钥匙另购买
Key needs to be purchased separately
[1-063-1]


选配件：拉攀1-017-3
Optional accessory:pull-tab 1-017-3

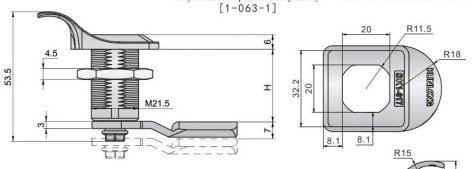





开孔尺寸
Opening Size

特点

- 密封防水性能强
- 多种锁片及止口高度,适合多种门厚

规　格 ● 材　　质：锌合金(ZDC)
● 表面处理：镀亮铬
● 锁芯内配防水圈,锁壳配防水垫
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 左右开门通用
● 钥匙需要另外购买,配1-063-1钥匙

Features
- Strong sealing waterproof performance
- Multiple pawls and spigot height, suitable for various door thickness

Specification
- Material:Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated
- Cylinder with waterproof ring, housing with waterproof gasket

Application
- Control box, Power box, Chassis cabinet

Date of delivery
- Common product inquiry is welcome

Remark
- Suitable for left and right side opening
- Keys need to be purchased separately

订货号 Item No.			重量(g) Weight:(g)
SK1-017	●	2D	82
1-063-1	●	2D	17

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁片型号 Pawl Type	止口高度(H) Spigot Height H	H1
088#	30	50.5
488#	35.5	49
788#	37	49
1488#	44.5	47

*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

迫紧圆头锁 Cam Lock


SK1-063D-1-62





[SK1-063D-1-62]



钥匙另购买
Key needs to be purchased separately
[1-063-1]







开孔尺寸
Opening Size

特点

- 密封性能良好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-1钥匙

Features

- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063D-1-62	●	2D	190
1-063-1	●	2D	51

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-3-15





[SK1-063D-3-15]




钥匙另购买
Key needs to be purchased separately
[1-063-3]









开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-3钥匙

Features

- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063D-3-15	●	2D	90
1-063-3	●	2D	49

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-3-38





[SK1-063D-3-38]



钥匙另购买
Key needs to be purchased separately
[1-063-3]

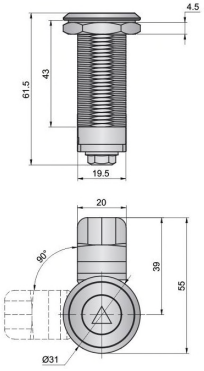





开孔尺寸
Opening Size

特点

- 密封性能良好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-3钥匙

Features

- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063D-3-38	●	2D	160
1-063-3	●	2D	49

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-3-62





[SK1-063D-3-62]




钥匙另购买
Key needs to be purchased separately
[1-063-3]









开孔尺寸
Opening Size

特点

- 密封性能良好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-3钥匙

Features

- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063D-3-62	●	2D	190
1-063-3	●	2D	49

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-4-11





[SK1-063D-4-11]




钥匙另购买
Key needs to be purchased separately
[1-063-4]









开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-4钥匙

Features

- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-063D-4-11	●	2D	100
1-063-4	●	2D	50

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-4-12





[SK1-063D-4-12]




钥匙另购买
Key needs to be purchased separately
[1-063-4]









开孔尺寸
Opening Size

特点

- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-4钥匙

Features

- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-063D-4-12	●	2D	71
1-063-4	●	2D	50

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063D-36





[SK1-063D-36]




钥匙另购买
Key needs to be purchased separately
[1-063-3]







伸缩行程 9
Flexible Distance 9



开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-3钥匙

Features

- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Keys need to be purchased separately

订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-063D-36	●	2D	74
1-063-3	●	2D	49

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧圆头锁 Cam Lock


SK1-063F



[SK1-063F]

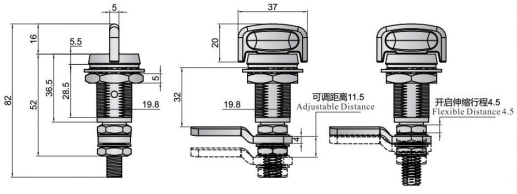





开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询

Features

- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-grade power box; Control box; Automation equipment; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-063F	●	2D	170


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧圆头锁 Cam Lock — SK1-063T-3


[SK1-063T-3]


钥匙另购买
Key needs to be purchased separately
[1-063-3]

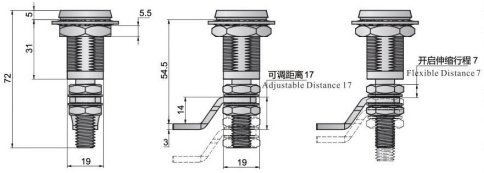




开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-3钥匙

Features
- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification
- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application
- High-grade power box; Control box; Automation equipment; etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Keys need to be purchased separately


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063T-3	●	2D	130
1-063-3	●	2D	49


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧圆头锁 Cam Lock — SK1-063T-4


[SK1-063T-4]


钥匙另购买
Key needs to be purchased separately
[1-063-4]

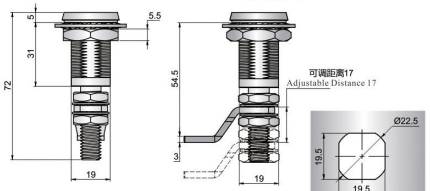


开孔尺寸
Opening Size



特点

- 具有回压功能
- 密封防水性能好
- 左右开门通用
- 不锈钢材质，受力稳定，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-4钥匙

Features
- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening
- Pure Stainless Steel, force stable, great corrosion resistance

Specification
- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application
- High-grade power box; Control box; Automation equipment; etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Keys need to be purchased separately


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063T-4	●	2D	130
1-063-4	●	2D	50


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧圆头锁 Cam Lock — SK1-063P-3S



[SK1-063P-3S]


钥匙另购买
Key needs to be purchased separately
[1-063-3]








开孔尺寸
Opening Size

特点

- 具有回压功能，有较好的密封柜门作用
- 左右开门通用

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 此产品外形小巧，开关方便
　　● 钥匙需要另外购买，配1-063-3钥匙

Features
- With back-pressure function and good sealing function
- Suitable for left and right side opening

Specification
- Material:Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application
- High-grade power box; Control box; Automation equipment; etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Small and exquisite, easy to use
- Keys need to be purchased separately


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063P-3S	●	2D	118
1-063-3	●	2D	49


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧圆头锁 Cam Lock — SK1-063P-4S


[SK1-063P-4S]


钥匙另购买
Key needs to be purchased separately
[1-063-4]








开孔尺寸
Opening Size

特点

- 具有回压功能，有较好的密封柜门作用
- 左右开门通用

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 此产品外形小巧，开关方便
　　● 钥匙需要另外购买，配1-063-4钥匙

Features
- With back-pressure function and good sealing function
- Suitable for left and right side opening

Specification
- Material:Stainless Steel(SUS304)
- Finish:Wire-drawing Polishing

Application
- High-grade power box; Control box; Automation equipment; etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Small and exquisite, easy to use
- Keys need to be purchased separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-063P-4S	●	2D	102
1-063-4	●	2D	50

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧圆头锁 Cam Lock


SK1-063PH-4S




[SK1-063PH-4S]



钥匙另购买
Key needs to be purchased separately
[1-063-4]





特点

- 具有回压功能，有较好的密封柜门作用
- 左右开门通用
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高档电力箱、控制箱、自动化设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-4钥匙

Features
- With back-pressure function and good sealing function
- Suitable for left and right side opening
- Stainless Steel material, great corrosion resistance performance

Specification
- Material:Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application
- High-grade power box; Control box; Automation equipment; etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Keys need to be purchased separately

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-063PH-4S	●	2D	150
1-063-4	●	2D	50

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 Cam Lock

SK1-063-4S




[SK1-063-4SL]




[SK1-063-4SR]



钥匙另购买
[1-063-4]
Key needs to be purchased separately







特点

- 密封防水性能强
- 多种锁片及止口高度,适合多种门厚
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
　　● 锁芯内配防水圈,锁壳配防水垫
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 钥匙需要另外购买，配1-063-4钥匙

Features
- Strong sealing waterproof performance
- Multiple pawls and spigot height, suitable for various door thickness
- Stainless Steel material, great corrosion resistance performance

Specification
- Material: Stainless Steel(SUS304)
- Finish:Bright Polishing
- Cylinder with waterproof ring, housing with waterproof gasket

Application
- Control box, Power box, Chassis cabinet

Date of delivery
- Common product inquiry is welcome

Remark
- Keys need to be purchased separately

订货号 Item No.	2D	RoHS	锁芯形状 Cylinder Style	锁芯颜色 Cylinder Color	重量(g) Weight:(g)
SK1-063-4SL	2D	●	四方锁芯 Square	不锈钢本色 Natural	60
SK1-063-4SR	2D	●	四方锁芯 Square	不锈钢本色 Natural	60

●:RoHS对应产品　▲:RoHS可对应产品

不锈钢锁片（选配） Stainless Steel Pawls		
锁片型号 Pawl type	止口高度(H) Spigot Height H	锁片长度L(mm) Length
088S#	18	46
488S#	22	45.5
788S#	25	44.5

*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 Cam Lock

SK1-063



[SK1-063-1B]
[SK1-063-1W]



[SK1-063-3B]
[SK1-063-3W]



[SK1-063-4W]



[SK1-063-6B]
[SK1-063-6W]




[SK1-063-1S]





[SK1-063-3S]



[SK1-063-5S]







特点

- 密封防水性能强
- 多种锁片及止口高度,适合多种门厚

规　格 ● 材　　质：锌合金(ZDC).不锈钢(SUS304)
　　● 表面处理：烤漆黑色、镀亮铬、镜面抛光
　　● 锁芯内配防水圈,锁壳配防水垫
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 一字锁芯和三角锁芯有不锈钢材质产品
　　● 锁芯与锁片可任意组合
　　● 钥匙需要另外购买

Features
- Strong sealing waterproof performance
- Multiple pawls and spigot height, suitable for various door thickness


Specification
- Material:Zinc Alloy(ZDC),Stainless Steel(SUS304)
- Finish: Black Painted, Bright Chrome Plated, Bright Polishing
- Cylinder with waterproofing, housing with waterproof gasket


Application
- Control box, Power box, Chassis cabinet


Date of delivery
- Common product inquiry is welcome

Remark
- Double bit and triangle cylinder have stainless steel material
- Cylinder and pawl can be any combined
- Keys need to be purchased separately



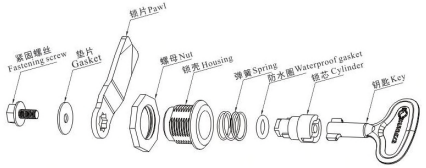





订货号 Item No.	2D	RoHS	锁芯形状 Cylinder Style	锁芯颜色 Cylinder Color	选配钥匙 Key Styles	重量(g) Weight:(g)
SK1-063-1B	2D	●	一字锁芯 Double bit	黑色 Black	1-063-1	49
SK1-063-1W	2D	●	一字锁芯 Double bit	亮色 Bright	1-063-1	51
SK1-063-3W	2D	●	三角锁芯 Triangle	亮色 Bright	1-063-3	49
SK1-063-3B	2D	●	三角锁芯 Triangle	黑色 Black	1-063-3	48
SK1-063-4W	2D	●	四方锁芯 Square	亮色 Bright	1-063-4	50
SK1-063-6B	2D	●	六角锁芯 Hex recess	黑色 Black	1-063-6	52
SK1-063-6W	2D	●	六角锁芯 Hex recess	亮色 Bright	1-063-6	52

镀锌锁片（选配） Zinc Pawls		
锁片型号 Pawl type	止口高度(H) Spigot Height H	锁片长度L(mm) Length
088#	18	51
488#	22	50
788#	25	50
1488#	31	45

*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

订货号 Item No.	2D	RoHS	锁芯形状 Cylinder Style	锁芯颜色 Cylinder Color	选配钥匙 Key Styles	重量(g) Weight:(g)
SK1-063-1S	2D	●	一字锁芯 Double bit	不锈钢本色 Natural	1-063-1	60
SK1-063-3S	2D	●	三角锁芯 Triangle	不锈钢本色 Natural	1-063-3	58
SK1-063-5S	2D	●	一字下沉 Double bit	不锈钢本色 Natural	1-063-5	63

不锈钢锁片（选配） Stainless Steel Pawls		
锁片型号 Pawl type	止口高度(H) Spigot Height H	锁片长度L(mm) Length
088S#	18	46
488S#	22	45.5
788S#	25	44.5


*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS
▲ Refers to the replaceable product instructed by RoHS




拇指锁 Cam Lock

SK1-064-1

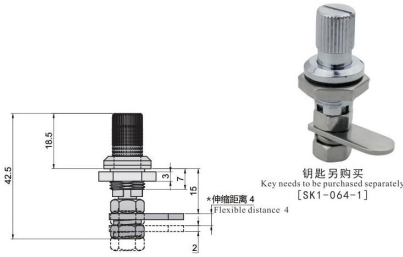

钥匙另购买
Key needs to be purchased separately
[SK1-064-1]



订货号 Item No.		重量(g) Weight:(g)
SK1-064-1	2D	30

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 按压旋转开门, 迫紧功能好
- 可用一字螺丝刀按压旋转
- 设有卡位，有效防止振动而自然开门的现象

规 格 ● 材 质：锌合金(ZDC)、冷轧板(SPCC)
● 表面处理：镀亮铬
操 作 ● 按下按钮的同时旋转按钮即可开门
用 途 ● 小型机箱机柜、控制箱侧门
交货期 ● 常规产品. . . 敬请垂询

Features

- Pressing and rotating to open. strong compression force
- Pressing the rotary blade slot type screwdriver
- With screen, effectively prevent vibration to open

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Bright Chrome Plated

Operation

- Pressing the rotating door to open

Application

- Mini chassis cabinet, Control side door

Date of delivery

- Common product inquiry is welcome

圆头锁 Latch


SK1-070




[SK1-070S]



[SK1-070]





开孔尺寸
Opening Size

特点

- 拉起取手即开启
- 左右兼用型

规 格 ● 材 质：不锈钢(SUS304)/树脂ABS/锌合金/尼龙(PA)+锌合金
● 表面处理：镜面抛光/黑色/白色/镀亮铬
用 途 ● 医疗设备、船舶、自动化设备、汽车工业
交货期 ● 常规产品. . . 敬请垂询
备 注 ● 尼龙和ABS材质需自配自攻螺丝

Features

- Pulling the handle and open
- Suitable for left and right side opening

Specification

- Material: Stainless Steel(SUS304)/Zinc Alloy(ZDC) ABS/Nylon(PA)+Zinc Alloy(ZDC)
- Finish: Bright Polishing/Bright Chrome Plated White/Black

Application


- Medical equipment, Marine, Automation equipment, Automotive

Date of delivery

- Common product inquiry is welcome

Remark

- Nylon and ABS materials need to be installed with self tapping screws (not supplied)



订货号 Item No.			颜色 Color	材质 Material	钥匙 Key	H	D	重量(g) Weight:(g)
SK1-070A-D	2D	●	黑色 Blank	树脂 ABS	无钥匙 NO	5	12-18	46
SK1-070A-H	2D	●	黑色 Blank	树脂 ABS	无钥匙 NO	14	0-10	51
SK1-070A-HW	2D	●	白色 White	树脂 ABS	无钥匙 NO	14	0-10	51
SK1-070K-D	2D	●	黑色 Blank	树脂 ABS	有钥匙 YES	5	12-18	56
SK1-070K-H	2D	●	黑色 Blank	树脂 ABS	有钥匙 YES	14	0-10	58
SK1-070K-HW	2D	●	白色 White	树脂 ABS	有钥匙 YES	14	0-10	58
SK1-070S	2D	●	镜面抛光 Bright Polishing	不锈钢 SUS304	无钥匙 NO	14	0-10	217
SK1-070-T	2D	●	黑色 Blank	尼龙 锌合金 Nylon ZDC	无钥匙 NO	5	12-18	225
SK1-070W	2D	●	镀亮铬 Bright Chrome Plated	锌合金 ZDC	有钥匙 YES	14	0-10	225

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

撞击锁 Cam Lock

SK1-064




[SK1-064]




[SK1-064K]










开孔尺寸
Opening Size





订货号 Item No.		重量(g) Weight:(g)
SK1-064	2D	79
SK1-064K	2D	89

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 按压即可开门，使用方便
- 设计按压力度轻巧, 省力

规 格 ● 材 质：锌合金(ZDC)
● 表面处理：镀亮铬
用 途 ● 小型机箱机柜、控制箱侧门
交货期 ● 常规产品. . . 敬请垂询

Features

- Push and open, easy to use
- Pressing strength lightweight design, less effort

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Mini chassis cabinet, Control side door

Date of delivery

- Common product inquiry is welcome

圆头锁 Cam Lock

SK1-087-1




[SK1-087]




钥匙另购买
Key needs to be purchased separately
[1-063-1]




一字锁芯
Double bit








开孔尺寸
Opening Size





锁片型号 Pawl type	止口高度(H) Spigot Height H
088#	18
488#	22
788#	25
1488#	32

*请订购时注明所要的止口高度

*Please remark the spigot height you wanted when you ordering

订货号 Item No.			重量(g) Weight:(g)
SK1-087-1	●	2D	54
1-063-1	●	2D	17

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 内部为弹簧装置, 即使有振动也不会影响锁的功能
- 开启和关闭时的回馈良好, 确保了锁定和开启位置
- 适用于大多数机柜门安装, 外观简洁大方

规 格 ● 材 质：锌合金(ZDC)、冷轧板(SPCC)
● 表面处理：镀砂铬
用 途 ● 机箱机柜、配电箱、电表箱
交货期 ● 常规产品. . . 敬请垂询
备 注 ● 有不同止口高度锁片可选
● 钥匙需要另外购买

Features

- Innerspring structure and without impact even vibration
- Open and close with good feedback ensure locking and opening position
- Suitable for most cabinet doors installation, simple and elegant appearance

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Sand Chrome Plated

Application

- Chassis cabinet, Distribution box, Meter box

Date of delivery

- Common product inquiry is welcome

Remark


- Difference spigot height for pawls can be chosen
- Keys need to be purchased separately


圆头防水锁 Cam Lock — SK1-087H



[SK1-087H]


[1-087H-3KQ]



钥匙另购买
Key needs to be purchased separately
[1-063-4]







安装图
Installation Drawing



特点

- 锁芯与锁壳一体成型，防水等级IP65
- 弹片设计，开启和关闭时回馈性良好
- 具有回压功能

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 户外机柜、电力设备、控制箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 有不同止口高度锁片可选
　　● 钥匙需要另外购买

Features

- The lock cylinder and housing are molded in one, waterproof grade IP65
- Innerspring structure, easy to open and close
- With back pressure function

Specification

- Material:Zinc Alloy(ZDC)
- Finish: Black Painted

Application

- Outdoor cabinets,Electrical equipment,Control box

Date of delivery

- Common product inquiry is welcome

Remark


- Difference pawls spigot height for pawls can be chosen
- Keys need to be purchased separately


订货号 Item No.		重量(g) Weight(g)
SK1-087H	2D	59
1-063-4	2D	50
1-087H-3KQ	2D	52


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock — SK1-092


[SK1-092]









开孔尺寸
Opening Size

锁片型号 Pawl type	止口高度(H) Spigot Height H
088#	18
488#	22
788#	25
1488#	32

*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

特点

- 可加装挂锁，可选用不同锁芯和锁片
- 多种止口高度可选，适合多种门厚

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色或镀亮铬
用　途 ● 机箱机柜、控制箱、电力箱、户外柜
交货期 ● 常规产品. . .敬请垂询
备　注 ●钥匙需要另外购买

Features

- Padlock can be added, different cylinder and pawl can be chosen
- Multiple spigot height can be chosen, suitable for various door thickness

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted, Bright Chrome Plated

Application

- Chassis cabinet, Control box, Power box, Outdoor cabinet

Date of delivery

- Common product inquiry is welcome

Remark


- Keys need to be purchased separately


订货号 Item No. 黑色 Black	亮色 Bright	RoHS	CAD	锁芯形状 Cylinder Style	重量(g) Weight(g)
SK1-092-3B	SK1-092-3W	●	2D	三角锁芯 Triangle	80


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆柱挂锁 Cam Lock — SK1-096



[SK1-096]


安装图
Installation Drawing









特点

- 可加挂锁，旋转90度实现开启和关闭
- 锁片为锌合金铸造，具有90度限位功能
- 带防水圈具有防水功能

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：本体/烤漆灰色,锁片/镀锌
用　途 ● 机箱机柜、控制箱、电力箱
交货期 ● 常规产品. . .敬请垂询

Features

- Padlock can be added, rotate 90° and open and close
- Pawls is zinc alloy casting with 90 ° limit function
- With waterproof ring, waterproof function

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Body : Gray Painted, Pawl : Zinc Plated

Application

- Chassis cabinet, Control box, Electrical box

Date of delivery

- Common product inquiry is welcome


订货号 Item No.		重量(g) Weight(g)
SK1-096	2D	131

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock — SK1-097



[SK1-097-1]



[SK1-097-2X]




开孔尺寸
Opening Size








[SK1-097-1]



[SK1-097-2]



特点

- 具有密封防水功能
- 两种手柄外观可选,方便操作
- 锁片端部圆角处理，方便将门卡入

规　格 ● 材　　质：锌合金(ZDC)、尼龙(PA)
　　● 表面处理：烤漆黑色、镀亮铬
用　途 ● 机箱机柜、控制箱、电力箱
交货期 ● 常规产品. . .敬请垂询

Features

- With waterproof sealing
- Two handles can be chosen, easy to use
- Ends of the pawls rounded handle for convenient door snaps into

Specification

- Material: Zinc Alloy(ZDC), Nylon(PA)
- Finish: Black Painted, Bright Chrome Plated

Application

- Chassis cabinet, Control box, Electrical box

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight(g)
SK1-097-1	2D	93
SK1-097-2X	2D	80


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock — SK1-098



[SK1-098-1]



[SK1-098-2]


安装图 Installation Drawing













开孔尺寸 Opening Size

特点

- 具有密封防水功能
- 带钥匙和不带钥匙两种规格
- 锁片止口高度多种可选

规　格 ● 材　　质：锌合金(ZDC)，冷轧板(SPCC)
　　● 表面处理：孔雀绿、镀锌
用　途 ● 电箱、网络机柜、通信机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 其它锁片高度可参见P011页中SK1-092产品锁片形式
　　● 钥匙需要另外购买

Features
●With waterproof sealing
●With key and without key can be chosen
●Different spigot height can be chosen
Specification
●Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
●Finish: Malachite Green,Zinc Plated
Application
●Electrical box, Network cabinet, Communication cabinet
Date of delivery
●Common product inquiry is welcome
Remark
●Other pawls height, please refer to P011 SK1-092
●Keys need to be purchased separately


订货号 Item No.			重量(g) Weight:(g)
SK1-098-1	2D	●	117
SK1-098-2	2D	●	109


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


面板锁 Cam Lock — SK1-099



[SK1-099-1]

安装图 Installation Drawing









开孔尺寸 Opening Size

特点

- 具有防尘、防水功能
- 锁芯阻尼回馈性良好

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆灰色
用　途 ● 柜门、网络机柜、通信机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 此产品只提供一种止口高度
　　● 钥匙需要另外购买

Features
●With waterproof and dustproof function
●Cylinder with good damping feedback
Specification
●Material: Zinc Alloy(ZDC)
●Finish: Gray Painted
Application
●Cabinet, Network cabinet, Communication cabinet
Date of delivery
●Common product inquiry is welcome
Remark
●Only provide one spigot height
●Keys need to be purchased separately


订货号 Item No.			材质 Material	重量(g) Weight:(g)
SK1-099-1	2D	●	ZDC	124


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock — SK1-101B



[SK1-101B]

安装图 Installation Drawing









特点

● 防尘、防水功能
● 小巧,易于安装于空间较小的门板上

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 小型柜门、信箱、电箱柜
交货期 ● 常规产品. . .敬请垂询

Features
●With waterproof and dustproof function
●Small and exquisite, easy to install on small space door panel
Specification
●Material:Zinc Alloy(ZDC)
●Finish: Black Painted
Application
●Cabinet, Mail box, Distribution box
Date of delivery
●Common product inquiry is welcome


订货号 Item No.			重量(g) Weight:(g)
SK1-101B	●	2D	72


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


面板锁 Cam Lock — SK1-0817


[SK1-0817]


安装图 Installation Drawing







开孔尺寸 Opening Size



特点


● 防水、防尘功能
● 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 旋转锁片90度即可开启或关闭门
　　● 钥匙需要另外购买

Features
●With dust-proof, waterproof performance
●Suitable for left and right side opening
Specification
●Material: Zinc Alloy (ZDC)
●Finish: Black Painted
Application
●Power box; Control box; Chassis cabinet
Date of delivery
●Common product inquiry is welcome
Remark
●Rotating the pawl in 90 degree and open and close
●Keys need to be purchased separately


订货号 Item No.		重量(g) Weight:(g)
SK1-0817	2D	132


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS




圆头锁 Cam Lock — SK1-063F-1


[SK1-063F-1]

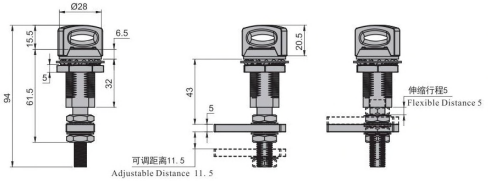





开孔尺寸
Opening Size

特点

- 具有回压功能
- 密封防水性能好
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 高档电力箱，控制箱，自动化设备等
交货期 ● 常规产品…敬请垂询

Features
- With back-pressure function
- Strong sealing waterproof performance
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application
- Power box,Control box,Automation equipment,etc.

Date of delivery
- Common product inquiry is welcome

订货号 Item No.	RoHS	2D	重量(g) Weight(g)
SK1-063F-1	●	2D	158


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

压缩门扣 Cam Lock — SK1-011


[SK1-011]


[通用扳手]
General Wrench





开孔尺寸
Opening Size

特点

- 调整与门板安装的基座方向可实现左右开门兼用
- 配有密封防水胶垫

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 配电箱、配电盘、空压机、工业配套
交货期 ● 常规产品…敬请垂询
备　注 ● 扳手在撬动的同时旋转扳手从而开启
　　● 通用钣手是两个锁配一个

Features
- Adjust pedestal direction of door panel installation can be realized left and right side opening
- With sealing waterproof gasket

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application
- Distribution box, Switchboard, Air compressor, Supporting industries ;etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Pry the wrench, rotate wrench to open at the same time
- Two locks with one wrench

订货号 Item No.	RoHS	材质 Material	重量(g) Weight(g)
SK1-011	●	ZDC	360


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 Cam Lock — SK1-0815



[SK1-0815-1]



[SK1-0815-2]













开孔尺寸
Opening Size



开孔尺寸
Opening Size



特点

- 锁芯可在开启和关闭的两种状态下锁定
- 方便旋转操作的横向突出结构设计
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
　　● 适合的门板厚度范围大
用　途 ● 控制箱、电力箱、网络机柜
交货期 ● 常规产品…敬请垂询
备　注 ● 根据实际门的止口高度选择型号

Features
- Cylinder latching under opening and closing
- Easy to rotate installation with horizontally cam structure
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy (ZDC)
- Finish: Black Painted
- Large thickness range of door

Application
- Power box; Control box; Network cabinet

Date of delivery
- Common product inquiry is welcome

Remark
- Selecting the types according to the spigot height of the door

订货号 Item No.	RoHS	2D	重量(g) Weight(g)
SK1-0815-1	●	2D	152
SK1-0815-2	●	2D	80


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


压缩门扣 Cam Lock — SK1-009



[SK1-009]


[通用扳手]
General Wrench









开孔尺寸
Opening Size

特点

- 调整与门板安装的基座方向可实现左右开门兼用
- 配有密封防水胶垫

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 配电箱、配电盘、空压机、工业配套
交货期 ● 常规产品…敬请垂询
备　注 ● 扳手在撬动的同时旋转扳手从而开启
　　● 通用钣手是两个锁配一个

Features
- Adjust pedestal direction of door panel installation can be realized left and right side opening
- With sealing waterproof gasket

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application
- Distribution box, Switchboard, Air compressor, Supporting industries ;etc.

Date of delivery
- Common product inquiry is welcome

Remark
- Pry the wrench, rotate wrench to open at the same time
- Two locks with one wrench

订货号 Item No.	RoHS	重量(g) Weight(g)
SK1-009	●	240

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

密码锁 Combination Lock

SK1-001



[SK1-001A]

特点

- 只需核对密码, 即可开锁
- 由0-9的数字构成4位数密码, 可以有10000种密码
- 左右兼用型

规　格 ● 材　　质：锌合金(ZDC)
● 表面处理：镀枪黑色
用　途 ● 信息盘、通信用机架、网络机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 请定期在活动部位涂抹润滑剂
● 当遗忘密码时, 可用钥匙开锁重新设定
● 此密码锁的原始密码是：0000（4个0）
● 请将密码记录在备忘录中, 以免忘记

Features

●Only check the password to open
●Password is composed of 4 Numbers from 0 to 9, billions of possible combinations
●Suitable for left and right side opening

Specification

●Material: Zinc Alloy (ZDC)
●Finish:Gun Black Plated

Application


●Information plate, Communication cabinet,Network cabinet


Date of delivery


●Common product inquiry is welcome

Remark

●Please put lubricant in the active parts regularly
●When you forget code,you can use the key to open and reset
●Please make note in your note book,avoid forget
●The combination lock original password is :0000 (Four Zero)









订货号 Item No.	2D	H	表面处理 Finish	重量(g) Weight:(g)
SK1-001A	2D	21.5	镀枪黑色 Gun Black Plated	470


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

设置新密码 Set a new password

密码 Code 0 0 0 0 KUNLONG

当你决定好自己新的4位数密码后, 请先记录在贴纸上.
例如: 0 0 0 0
然后将贴纸贴在手柄的背面或者门的内侧.


Please mark on your tags when you decide your new code .
For example: 0 0 0 0
Then please paste it back of handle or inside door



推起可变拉杆
Push up the variable rod


然后依次改成要设置的密码. 修改时请务必确认密码是否已经很整齐地显示在手柄正上方. 如果密码设定错误, 则有可能打不开锁, 敬请注意.

Then set your password one by one.Please double check and confirm it whether show on the handle orderly when modification. If the password is wrong, it will not open the lock.Please pay more attention about it.



设置好后, 将可变拉杆复位, 密码设置完成. 最后, 将手柄恢复到原位, 将面板数字调整到其它号码, 即上锁. 使用时, 请确认是否为右图所示的状态. 如果可变拉杆一直被提起, 手柄将无法被锁闭.

After setting, reset the variable rod,and finish the password setting.Lastly, let the handle restoration and disorganize the code and finish locking



圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

平面锁 Panel Lock

SK1-007W-1



[SK1-007W-1]



[SK1-007S-1]

特点

- 产品厚重, 锁定性能强
- 可配成三点锁定的天地锁
- 带锁芯，有两种材质提供选择

规　格 ● 材　　质：锌合金(ZDC). 不锈钢(SUS304)
● 表面处理：镀亮铬或拉丝抛光
用　途 ● 配电箱、配电盘、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 锌合金产品不带锁盖

Features

●Heavy duty and strong latching performance
●Matching multi-point latching with three points
●With cylinder,two material can be chosen

Specification

●Material:Zinc Alloy(ZDC) or Stainless Steel(SUS304)
●Finish: Bright Chrome Plated or Wire-drawing Polishing

Application


●Distribution box, Switchboard, Equipment cabinet

Date of delivery


●Common product inquiry is welcome


Remark


●With cover of Zinc Alloy product
















[SK1-007W-1]











[SK1-007S-1]


订货号 Item No.	2D	RoHS	材质 Material	表面处理 Finish	重量(g) Weight:(g)
SK1-007W-1	2D	●	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	665
SK1-007S-1	2D	●	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	705

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


面板锁 Panel Lock


SK1-023














开孔尺寸
Opening Size



特点

- 标准配置新型锁芯,操作性好,带防尘片及钥匙
- 防水型(O型圈、密封垫)
- 不同外观及颜色可选

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：烤漆黑色、烤漆银色
用　途 ● 大型配分电箱、配分电盘、室内装饰
交货期 ● 常规产品...敬请垂询
备　注 ● 把手有90度旋转行程，左右兼用

Features

- Standard new cylinder, good operability, with dustproof plate and key
- Waterproof (O-ring, sealing gasket)
- Different appearance and colors can be chosen

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Black Painted, Silver Painted

Application


- Large distribution box, Distribution box, Interior decoration

Date of delivery

- Common product inquiry is welcome

Remark

- Handle with 90° rotate distance ,suitable for left and right side opening

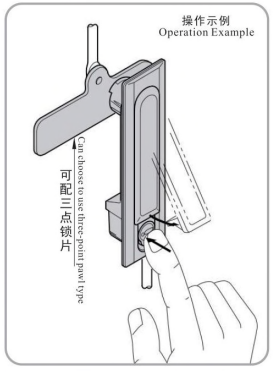

操作：
①开锁：将钥匙顺时针旋转90度，开锁。
②将手柄提起：如图所示，用手指按压锁芯部，弹起手柄。
③开门：将手柄顺时针或逆时针旋转90度，开门。
④关门：将手柄复位到原位置，然后上锁。

Operation:
①Unlocking：clockwise rotating the key in 90 degree to open
②Hold up the handle. As picture show. Push lock core by figure and then bounded it
③Opening: clockwise or contra rotating the handle in 90 degree to open
④Closing: Reset the handle to original position and then locked

订货号 Item No.			L1	L2	H	外形 Shape	颜色 Color	重量(g) Weight:(g)
SK1-023	2D	72	33.5	34		外方形 Square	黑色 Black	369
SK1-023R	2D	72	34	34		外圆形 Round	黑色 Black	450
SK1-023W	2D	73	32.5	33		外方形 Square	银色 Silver	360

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock


SK1-032















开孔尺寸
Opening Size





锁片型号 Pawl Type	止口高度(H) Spigot Height H	L1
088#	17	50.5
488#	21.5	49
788#	23.5	49
1488#	31	47

*请订购时注明所要的止口高度
*Please remark the spigot height you wanted when you ordering

特点

- 具有压缩迫紧功能
- 两种长度和颜色规格
- 左右兼用型
- 有效防止设备与门之间产生异响

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：烤漆黑色、烤漆银色
操　作 ● 旋转钥匙、滑动按钮开启
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品...敬请垂询
备　注 ● 多种锁片规格可选择

Features

- With compression and pressing function
- Two length and colors can be chosen
- Suitable for left and right side opening
- Effectively prevent abnormal noise between equipment and door

Specification

- Material: Zinc Alloy(ZDC), Cold Rolled Sheet(SPCC)
- Finish: Black Painted, Silver Painted

Operation

- Turn the key, slide the button to open

Application


- Control box, Power box, Chassis cabinet

Date of delivery

- Common product inquiry is welcome

Remark

- Various pawls specifications can be chosen




操作：
①开锁：将钥匙顺时针旋转90度，开锁。
②往下拉动手柄顶端的锁芯滑块，弹起手柄。
③开门：将手柄逆时针旋转90度，开门。
④关门：将手柄复位到原位置，然后上锁。
注：图中操作示例图只作操作示范，不一定是本产品图片

Operation:
① Unlocking :Clockwise rotating the key in 90 degree to open
② Pulling the cylinder sliding block of handle top and bound it
③ Opening :Contra rotate the handle in 90 degree to open
④ Closing : Reset the handle to original position and then locked
Remark: Only operation example, maybe not this product picture

订货号 Item No.			L	W	颜色 Color	钥匙 Key	重量(g) Weight:(g)	备注 Remark
SK1-032B	2D	●	110	91.5	黑色 Black	无钥匙 NO	120	此系列门锁分长型和短型两个系列，选型时可根据您箱体大小等选择适合的系列 This series door lock included long and short types, order the types as your box size
SK1-032BK	2D	●	110	91.5	黑色 Black	有钥匙 YES	134	
SK1-032W	2D	●	110	91.5	银色 Silver	无钥匙 NO	120	
SK1-032WK	2D	●	110	91.5	银色 Silver	有钥匙 YES	134	
SK1-037B	2D	●	81	62.5	黑色 Black	无钥匙 NO	102	
SK1-037BK	2D	●	81	62.5	黑色 Black	有钥匙 YES	118	
SK1-037W	2D	●	81	62.5	银色 Silver	无钥匙 NO	102	
SK1-037WK	2D	●	81	62.5	银色 Silver	有钥匙 YES	116	

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

安装图
Installation Drawing




电柜锁 Panel Lock

CAD RoHS **SK1-065**





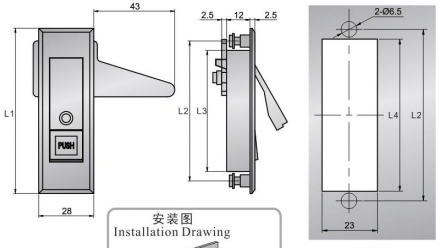

特点

- 按压按钮，锁片自动旋转开门
- 带锁芯和不带锁芯两种型号可选
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 机箱机柜、配电箱、电表箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 按压按钮，锁片自动旋转开启

Features

- Pressing button auto rotate the pawl to open
- With cylinder and without cylinder can be chosen
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Chassis cabinet, Distribution box, Meter box

Date of delivery

- Common product inquiry is welcome

Remark

- Pressing button auto rotate the pawl to open

订货号 Item No.	CAD	RoHS	H	L1	L2	L3	L4	钥匙 Key	重量(g) Weight(g)
SK1-065	2D	●	12	84	71	61.5	63	有钥匙 YES	104
SK1-066	2D	●	12	84	71	61.5	63	无钥匙 NO	85
SK1-067	2D	●	12	113.8	99	89.2	90	有钥匙 YES	125
SK1-068	2D	●	12	113.8	99	89.2	90	无钥匙 NO	117

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

电柜锁 Panel Lock

CAD RoHS **SK1-068-3**





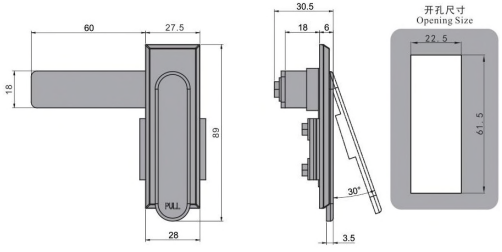

特点

- 锁体厚度薄，安装后表面突起少并且美观
- 单手指打开手柄，更方便和轻松
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 机箱机柜、电柜、电箱
交货期 ● 常规产品. . .敬请垂询
操　作 ● 单手指打开手柄，再旋转手柄打开

Features

- Thin Lock body, less embossment and beautiful after installation
- Single finger opening function is more convenient and easier to open
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application

- Chassis cabinet, Electrical cabinet, Electric box

Date of delivery

- Common product inquiry is welcome

Operation

- Opening handle with single finger and rotate handle

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-068-3	●	2D	149


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

RoHS CAD **SK1-081-1**



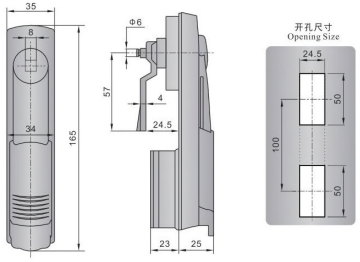

特点

- 调换锁片位置实现左右开门兼用
- 预留天地锁改装功能

规　格 ● 材　　质：尼龙(PA)
　　● 表面处理：黑色
用　途 ● 机箱机柜、配电箱、电力箱
交货期 ● 常规产品. . .敬请垂询
备　注 ● 把手有90度旋转行程

Features

- Exchange pawl direction to realize left and right side opening
- With multi-point latch reserved function

Specification

- Material: Nylon(PA)
- Finish: Black

Application

- Equipment cabinet, Distribution box, Power box

Date of delivery

- Common product inquiry is welcome

Remark

- Handle with 90 degree rotate distance

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-081-1	●	2D	190

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

CAD RoHS **SK1-083-W**





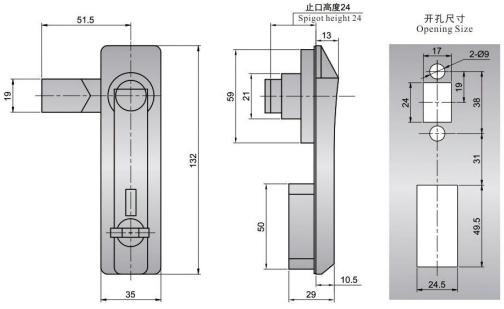

特点

- 单点锁定，配钥匙
- 钥匙开启手柄自动弹开
- 锁片折弯处理，以适用更大门框厚度

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆银色
用　途 ● 机箱机柜、配电箱、电力箱
操　作 ● 钥匙开启手柄自动弹开，旋转手柄即开门
交货期 ● 常规产品. . .敬请垂询
备　注 ● 把手有90度旋转行程

Features

- Single latching with key
- The handle will be bounced when using key to open
- Pawls bending to suitable for larger frame thickness

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Silver Painted

Operation

- Using key to open the handle automatically bounce, and rotate the handle to open the door

Application

- Chassis cabinet, Distribution box, Power box

Date of delivery

- Common product inquiry is welcome

Remark

- Handle with 90 degree rotate distance

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-083-W	●	2D	396

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

三点锁 Panel Lock

SK1-082



[SK1-082]



特点

- 三点锁定，也可单点锁定
- 产品体积大，厚重，具有强力锁定功能
- 配连杆转接头，装配上下连杆方便

规　格 ● 材　　质：锌合金(ZDC)、不锈钢(SUS304)
　　● 表面处理：烤漆黑色、镜面抛光
用　途 ● 机箱机柜、配电箱、电力箱
操　作 ● 把手90度旋转实现打开及锁定，调换定位件方向实现左右开启，止口高度可调节，也可带挂锁
交货期 ● 常规产品. . . 敬请垂询

Features

- Three points latching, also can be single point latching
- Bulky and heavy, with a strong latching function
- With rod adapter, easy assembly and down-link

Specification

- Material: Zinc Alloy(ZDC),Stainless Steel(SUS304)
- Finish: Black Painted, Bright Polishing

Operation


- Handle 90 degree rotation to achieve opened and locked, direction to achieve the positioning member exchange about open mouth only height adjustable, also available with padlock

Application


- Chassis cabinet, Distribution box, Power box


Date of delivery

- Common product inquiry is welcome

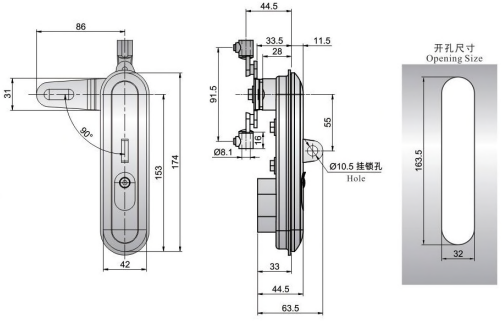


[SK1-082]



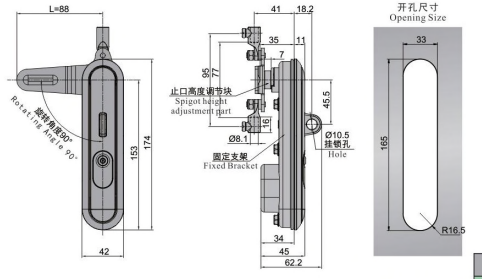

[SK1-082S-1K]



订货号 Item No.	RoHS	CAD	结构功能 Structure Function	材质 Material	重量(g) Weight(g)
SK1-082	●	2D	带挂锁 With Padlock	锌合金 Zinc Alloy	880
SK1-082S-1	●	2D	不带挂锁 Without Padlock	不锈钢 Stainless steel	1038
SK1-082S-1K	●	2D	带挂锁 With Padlock	不锈钢 Stainless steel	1066

● : RoHS对应产品　▲ : RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧门锁 Panel Lock

SK1-095



[SK1-095W-1]　[SK1-095B-1]



特点

- 锁片可自由调整至关门时适合的迫紧程度
- 锁片调整范围大且适中,适合大多数门板
- 开启后锁片可压缩行程3. 5mm

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：烤漆黑色、镀亮铬
用　途 ● 箱体、配电盘、船舶、医药、车辆
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 调换锁片位置实现左右上方向开门通用

Features

- Pawl can be adjusted to fit compression force degree when closed
- A wide range of adjustment for pawl, suitable for most door panel
- The pawl can be compressed by 3.5mm after opening

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Black Painted, Bright Chrome Plated

Application


- Cabinet, Distribution panel, Marine, Medicine, Vehicle

Date of delivery

- Common product inquiry is welcome

Remark

- Can be opened in left, right or upward direction by exchange the pawl position

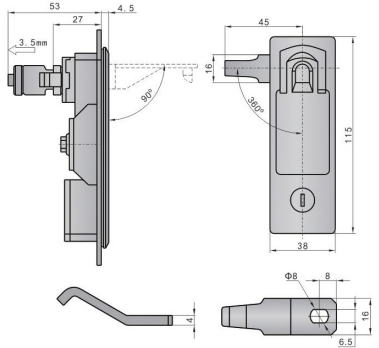

订货号 Item No.	RoHS	CAD	颜色 Color	重量(g) Weight(g)
SK1-095W-1	●	2D	亮色 Bright	359
SK1-095B-1	●	2D	黑色 Black	335

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

SK1-401



[SK1-401-1-1]



[SK1-401-2-3]



特点

- 具有密封防水功能
- 左右开门兼用
- 大中小三种规格可选

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆银色
用　途 ● 机箱机柜、配电箱、电柜
交货期 ● 常规产品. . . 敬请垂询

Features

- With waterproof sealing
- Suitable for left and right side opening
- Large, middle and small three sizes can be chosen

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Silver Painted


Application

- Chassis cabinet, Distribution box, Electrical cabinet

Date of delivery

- Common product inquiry is welcome







开孔尺寸
Opening Size

订货号 Item No. 带锁芯 With Cylinder	无锁芯 Without Cylinder	RoHS	CAD	L1	L2	L3	L4	L5	W1	W2	W3	W4	W5	W6	T
SK1-401-1-1	SK1-401-2-1	●	2D	117	36	39	30	72.5	26.5	151.5	41	25	14	30	3
SK1-401-1-2	SK1-401-2-2	●	2D	95.5	36	39.5	29.5	65	24	123	40	24	15	30	2.5
SK1-401-1-3	SK1-401-2-3	●	2D	62.5	33	40	28	65.5	24	92.5	40	24	14	29	2.5

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

平面锁 Panel Lock

SK1-094



特点

- 适合板厚1-5mm
- 左右开门兼用
- 大、中、小三种规格

规　格 ● 材　　质：锌合金(ZDC)．冷轧板(SPCC)
　　● 表面处理：镀珍珠铬
用　途 ● 机箱机柜、配电箱、网络机柜
交货期 ● 常规产品．．．敬请垂询

Features

- Suitable panel thickness:1.0-5.0mm
- Suitable for left and right side opening
- Three sizes: large, middle and small

Specification


- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish:Pearl Chrome Plated


Application


- Chassis cabinet, Distribution box, Network cabinet


Date of delivery

- Common product inquiry is welcome

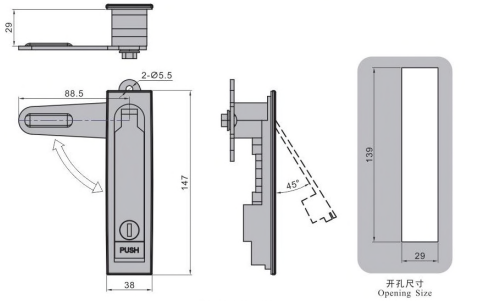

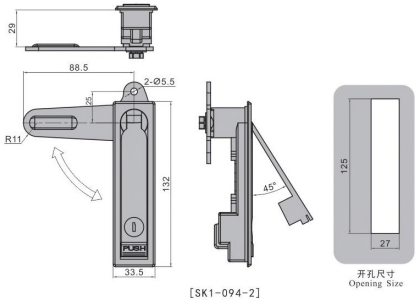

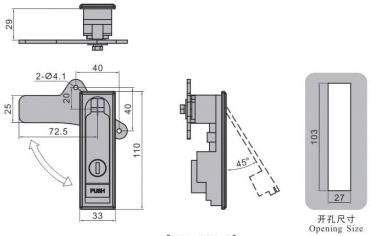

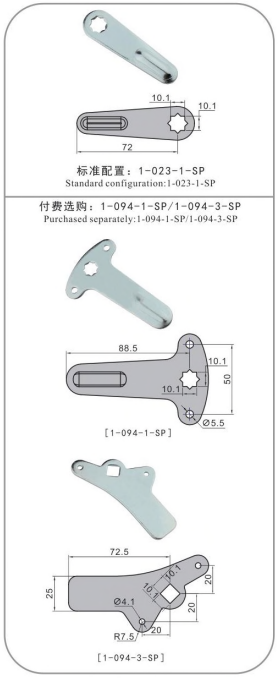

订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
1-023-1-SP	2D	●	//
1-094-1-SP	2D	●	//
1-094-3-SP	2D	●	//

订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
SK1-094-1	2D	●	526
SK1-094-2	2D	●	432
SK1-094-3	2D	●	374

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

SK1-843



特点

- 带锁芯，并附有防尘盖
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆银色
用　途 ● 电柜箱、网络机柜、通讯机柜
交货期 ● 常规产品．．．敬请垂询

Features

- With cylinder and dustproof cover
- Suitable for left and right side opening

Specification


- Material:Zinc Alloy (ZDC)
- Finish: Silver Painted


Application


- Electric cabinet box; Network cabinet; Communication cabinet

Date of delivery

- Common product inquiry is welcome

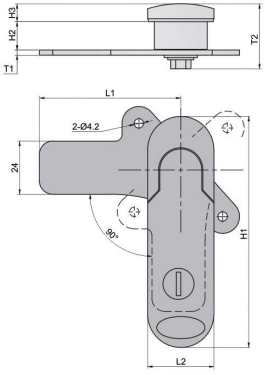





订货号 Item No.				RoHS	2D	L1	L2	H1	H2	H3	A	B	T1	T2
无锁芯 Without cylinder	重量(g) Weight:(g)	带锁芯 With cylinder	重量(g) Weight:(g)											
SK1-843-1	187	SK1-843-1K	190	●	2D	64	28	88	14.5	8.5	24	63	2	32.5
SK1-843-2	175	SK1-843-2K	220	●	2D	64	30	105	14	8	24	80	2.5	29.5
SK1-843-3	254	SK1-843-3K	264	●	2D	63.5	28	121.5	14.5	8	23	95.5	2.5	32

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

SK1-843-S

特点

- 带锁芯，并附有防尘盖
- 左右开门兼用

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 电柜箱、网络机柜、通讯机柜
交货期 ● 常规产品. . .敬请垂询

Features

- With cylinder and dustproof cover
- Suitable for left and right side opening

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- Electric cabinet box; Network cabinet; Communication cabinet


Date of delivery

- Common product inquiry is welcome



[SK1-843-1SK]



[SK1-843-2SK]


[SK1-843-3SK]











不锈钢锁片（选配） Stainless Steel Pawls	2D	RoHS	L	H	T	重量(g) Weight(g)
088S#	2D	●	55	6.5	6	18
488S#	2D	●	55	9.5	6	18
788S#	2D	●	54	12	6	18

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS







开孔尺寸
Opening Size




订货号 Item No. 带锁芯 With cylinder	重量(g) Weight(g)	RoHS	2D	L1	L2	H1	H2	H3	A	B	T1	T2
SK1-843-1SK	190	●	2D	64	32	88.5	16	7	26	67	2	31
SK1-843-2SK	220	●	2D	64.5	32	106	16	7	26	82	2	32
SK1-843-3SK	264	●	2D	64.5	32	123	15	7	26	96	2	31

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

SK1-730


[SK1-730]



特点

- 开启及关闭轻松
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀珍珠铬
用　途 ● 机箱机柜、配电箱、通讯机柜
交货期 ● 常规产品. . .敬请垂询

Features

- Easy to open and close
- Suitable for left and right side opening

Specification


- Material: Zinc Alloy (ZDC)
- Finish: Pearl Chrome Plated


Application


- Chassis cabinet; Distribution box; Network cabinet


Date of delivery

- Common product inquiry is welcome









订货号 Item No.	2D	重量(g) Weight(g)
SK1-730	2D	204

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

天地栓门锁 Panel Lock

SK1-0738C


[SK1-0738C]



特点

- 长轴型和短轴型两种型号可选
- 可加挂锁
- 左右兼用型

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
　　● 根据实际需求选择不同轴长
操　作 ● 把手打起，旋转90度即可开门
用　途 ● 机箱机柜、配电箱、通讯机柜
交货期 ● 常规产品. . .敬请垂询

Features

- Long or short shaft two types can be chosen
- Padlock can be added
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish:Bright Chrome Plated
- Different length shaft can be chosen

Operating


- The handle can be turned up and rotated 90 degree to open the door


Application


- Chassis cabinet; Distribution box; Network cabinet

Date of delivery

- Common product inquiry is welcome







订货号 Item No.	2D	重量(g) Weight(g)
SK1-0738C	2D	514

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle


杠杆锁 Panel Lock

CAD RoHS **SK1-C5**



[SK1-C5]

安装图 Installation Drawing



特点

- 微调螺母可调节门的迫紧程度
- 可实现快速拆装，方便快捷
- 通过单点实现锁闭
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
　　● 可适应1-5mm厚度的门板
用　途 ● 自动售货机、旅游大巴车、自动化设备
交货期 ● 常规产品. . . 敬请垂询

Features

- Adjust the door's compression degree by fine-tuning the nut
- Easy to quickly and conveniently disassemble.
- By single latching to realize locking
- Suitable for left and right side opening

Specification


- Material:Zinc Alloy (ZDC)
- Finish:Black Painted
- Suitable door panel thickness range:1mm to 5mm
- Suitable for left and right side opening

Application

- Vending machine; Tourist coach; Automation equipment etc.

Date of delivery

- Common product inquiry is welcome

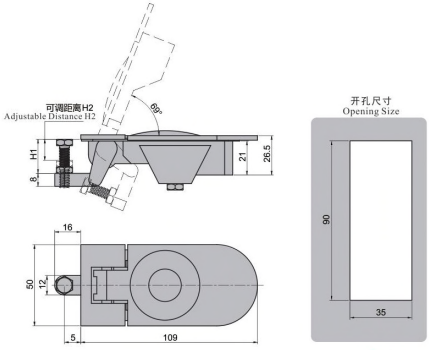

开孔尺寸 Opening Size

订货号 Item No.	RoHS	CAD	钥匙 Key	H1	H2	重量(g) Weight:(g)
SK1-C5-21B	●	2D	无钥匙 NO	21	0-15	339
SK1-C5-21BK	●	2D	有钥匙 YES	21	0-15	357
SK1-C5-52B	●	2D	无钥匙 NO	52	30-45	350
SK1-C5-52BK	●	2D	有钥匙 YES	52	30-45	357
SK1-C5-67B	●	2D	无钥匙 NO	67	45-60	350
SK1-C5-67BK	●	2D	有钥匙 YES	67	45-60	357

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

T型把手锁 Panel Lock

CAD **SK1-019**



[SK1-019]

安装图 Installation Drawing



特点

- T型旋转手柄，方便、省力
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 锁片上预留柱子，可改装成三点锁

Features

- Rotating T-handle , convenient and less effort
- Suitable for left and right side opening

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Black Painted

Application


- Control box, Power box, Chassis cabinet

Date of delivery

- Common product inquiry is welcome

Remark

- Can change to three points lock, lock plates have pillar

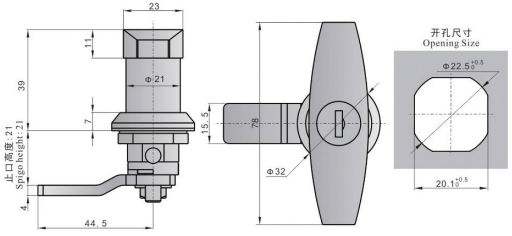

开孔尺寸 Opening Size

订货号 Item No.	CAD	重量(g) Weight:(g)
SK1-019	2D	212

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

平面锁 Panel Lock

NEW RoHS CAD **SK1-733**



[SK1-733-1-1]



[SK1-733-2-1]



特点

- 左右开门兼用
- 两种尺寸规格可选

规　格 ● 材　　质：锌合金(ZDC)，冷轧板(SPCC)
　　● 表面处理：镀亮铬
用　途 ● 机箱机柜、配电箱、网络机柜
交货期 ● 常规产品…敬请垂询

Features

- Suitable for left and right side opening
- Two types can be chosen

Specification


- Material: Zinc Alloy (ZDC), Cold Rolled Sheet(SPCC)
- Finish: Bright Chrome Plated

Application

- Chassis cabinet; Distribution box; Network cabinet;etc.


Date of delivery

- Common product inquiry is welcome

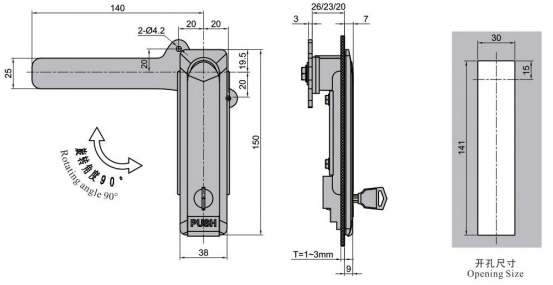


开孔尺寸 Opening Size

[SK1-733-1-1]

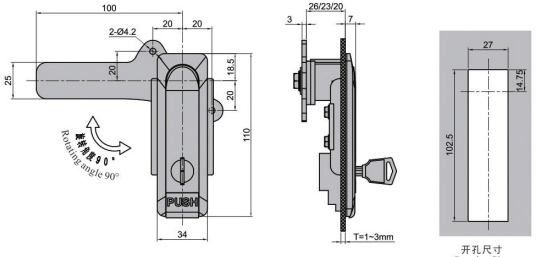

开孔尺寸 Opening Size

[SK1-733-2-1]



订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-733-1-1	●	2D	565
SK1-733-2-1	●	2D	406

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

平面锁 Panel Lock

SK1-716



[SK1-716-1] [SK1-716-2]

特点

- 把手旋转90度开启门
- 调换锁片位置实现左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀珍珠铬
用　途 ● 电力箱、控制箱、自动化设备
交货期 ● 常规产品. . . 敬请垂询

Features

- Handle rotate 90 degree and open the door
- Exchange pawl position to realize left and right side opening

Specification

- Material: Zinc Alloy (ZDC)
- Finish: Pearl Chrome Plated


Application

- Power box; Control box; Automatic equipment


Date of delivery

- Common product inquiry is welcome




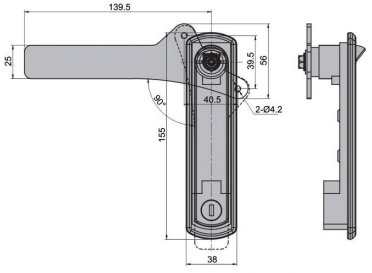


[SK1-716-1]




开孔尺寸
Opening Size




安装图
Installation Drawing





[SK1-716-2]



开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-716-1	●	2D	452
SK1-716-2	●	2D	418

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

平面锁 Panel Lock

SK1-844



[SK1-844]



特点

- 调换锁片位置实现左右开门兼用

规　格 ● 材　　质：不锈钢（SUS304）
　　● 表面处理：拉丝抛光
用　途 ● 电柜箱、网络机柜、通讯机柜
交货期 ● 常规产品…敬请垂询

Features

- Exchange pawl position to realize left and right side opening

Specification


- Material: Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing


Application


- Electric cabinet box; Network cabinet; Communication cabinet;etc.

Date of delivery

- Common product inquiry is welcome







开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-844	2D	●	253

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

SK1-845



[SK1-845]



特点

- 调换锁片位置实现左右开门兼用

规　格 ● 材　　质：不锈钢（SUS304）
　　● 表面处理：拉丝抛光
用　途 ● 电柜箱、网络机柜、通讯机柜
交货期 ● 常规产品…敬请垂询

Features

- Exchange pawl position to realize left and right side opening

Specification


- Material: Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing


Application

- Electric cabinet box; Network cabinet; Communication cabinet;etc.

Date of delivery

- Common product inquiry is welcome







开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-845	2D	●	220

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

三点锁 Panel Lock

SK1-079



[SK1-079]

特点

- 三点锁定，也可单点锁定
- 具有强力锁定功能
- 配连杆转接头，装配上下连杆方便

规　格 ● 材　　质：锌合金（ZDC）
　　● 表面处理：烤漆黑色
用　途 ● 机箱机柜、配电箱、电力箱
交货期 ● 常规产品…敬请垂询

Features

- Three points latching, also can be single point latching
- With a strong latching function
- With rod adapter, easy assembly and down-link

Specification


- Material: Zinc Alloy (ZDC)
- Finish: Black Painted


Application

- Chassis cabinet; Distribution box; Power box;etc.


Date of delivery

- Common product inquiry is welcome

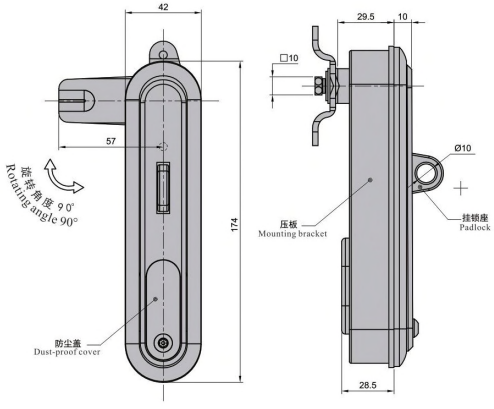



开孔尺寸
Opening Size



订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-079	●	2D	790

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

机柜锁 Panel Lock

SK1-026



[SK1-026]



[SK1-027]



锁片
Lock sheet

特点

- 有带钥匙和不带钥匙两种规格可选

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 调换锁片方向可实现左右开门兼用

Features

- With key and without key two types can be chosen

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application


- Chassis cabinet, Control box , Power box


Date of delivery


- Common product inquiry is welcome


Remark

- Exchange pawl position to realize left and right side Catching










开孔尺寸
Opening Size



订货号 Item No.	RoHS	CAD	钥匙 Key	重量(g) Weight:(g)
SK1-026	●	2D	无钥匙 NO	159
SK1-027	●	2D	有钥匙 YES	135

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

平面回压式门锁 Panel Lock

SK1-055



[SK1-055S]



[SK1-055SK]



钥匙
Key

特点

- 具有压缩迫紧功能
- 左右兼用型
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 机箱机柜、配电箱、电柜、船舶
交货期 ● 常规产品. . .敬请垂询
备　注 ● 锁片轴心孔设计四点定位，可快速方便组装完全不松动

Features

- With compression and pressing function
- Suitable for left and right side opening
- Stainless Steel material, great corrosion resistance performance

Specification

- Material: Stainless Steel(SUS304)
- Finish: Wire-drawing Polishing

Application


- Equipment cabinet, Distribution box, Electrical cabinet, Marine

Date of delivery


- Common product inquiry is welcome


Remark


- Pawls shaft hole design with four points position, quickly and tightly assemble



开孔尺寸
Opening Size







订货号 Item No.	RoHS	CAD	钥匙 Key	重量(g) Weight:(g)
SK1-055S	●	2D	无钥匙 NO	179
SK1-055SK	●	2D	有钥匙 YES	199

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

平面回压式门锁 Panel Lock

SK1-050



[SK1-050B]



[SK1-050W]



[SK1-051B]



[SK1-051W]



钥匙 Key

特点

- 具有压缩迫紧功能
- 两种颜色、带钥匙和不带钥匙规格
- 调换锁片方向可实现左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
● 表面处理：烤漆黑色、镀亮铬
● 锁片可正反装配，以适应不同的板厚
操　作 ● 开启钥匙，向上掀起手柄，旋转90度开启
用　途 ● 机箱机柜、电柜、激光设备、自动化设备
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 该锁具有良好迫紧功能，开、闭回馈良好

Features

●With compression and pressing function
●Two colors,with key and without key can be chosen
●Exchange pawl direction to realize left and right side opening

Specification

●Material: Zinc Alloy(ZDC)
●Finish: Black Painted, Bright Chrome Plated

Operation

●Turing the key, rotating the lever in 90 degree to open

Application


●Equipment cabinet, Electrical cabinet, Laser equipment, Automatic equipment

Date of delivery


●Common product inquiry is welcome


Remark


●With strong compression force, and good feedback to open and close

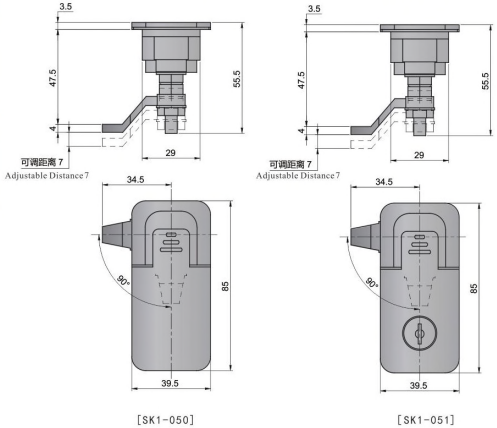

[SK1-050]　[SK1-051]







开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	钥匙 Key	颜色 Color	重量(g) Weight(g)
SK1-050B	●	2D	无钥匙 NO	黑色 Black	191
SK1-050W	●	2D	无钥匙 NO	亮色 Bright	191
SK1-051B	●	2D	有钥匙 YES	黑色 Black	237
SK1-051W	●	2D	有钥匙 YES	亮色 Bright	237

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面回压式门锁 Panel Lock

SK1-052



[SK1-052-2]



[SK1-053-1]



[SK1-053-2]

特点

- 具有压缩迫紧功能
- 调整锁片可适合不同门板厚度
- 左右兼用型

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
● 表面处理：烤漆黑色、镀亮铬
用　途 ● 机箱机柜、配电箱、电柜
交货期 ● 常规产品. . . 敬请垂询

Features

●With compression and pressing function
●Locking plate can be adjusted for different door thickness
●Suitable for left and right side opening

Specification


●Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
●Finish:Black Painted , Bright Chrome Plated


Application


●Equipment cabinet, Distribution box, Electrical cabinet

Date of delivery


●Common product inquiry is welcome







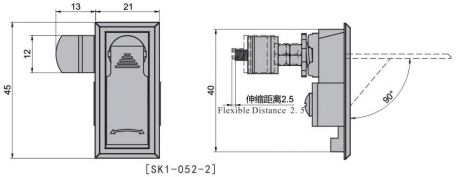

[SK1-052-2]
[SK1-052-1]





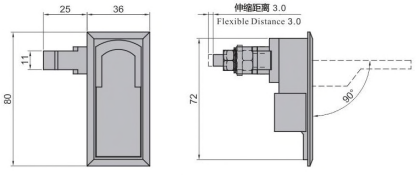

[SK1-053-1]
[SK1-053-2]

订货号 Item No.	RoHS	CAD	颜色 Color	重量(g) Weight(g)
SK1-052-1	●	2D	亮色 Bright	47
SK1-052-2	●	2D	黑色 Black	47
SK1-053-1	●	2D	亮色 Bright	187
SK1-053-2	●	2D	黑色 Black	194

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面单点锁 Panel Lock — SK1-059


[SK1-059-1B]


[SK1-060-2W]


钥匙 Key

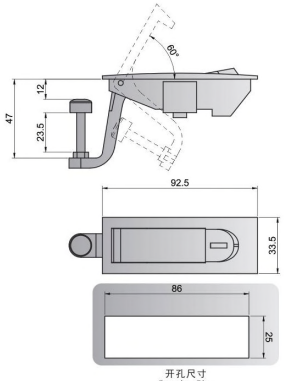

开孔尺寸 Opening Size

特点

- 具有压缩迫紧功能
- 微调螺母可调节门的迫紧程度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色或镀亮铬
用　途 ● 机箱机柜、配电箱、电柜、工具箱柜
交货期 ● 常规产品. . . 敬请垂询

Features
- With compression and pressing function
- Adjust the door's compression degree by fine-tuning the nut
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Black Painted or Bringht Chrome Plated

Application
- Equipment cabinet, Distribution box, Electrical cabinet, Tool cabinet

Date of delivery
- Common product inquiry is welcome


订货号 Item No.	RoHS	2D	钥匙 Key	颜色 Color	重量(g) Weight(g)
SK1-059-1B	●	2D	有钥匙 YES	黑色 Black	202
SK1-059-2W	●	2D	有钥匙 YES	亮色 Bright	68
SK1-060-1B	●	2D	无钥匙 NO	黑色 Black	196
SK1-060-2W	●	2D	无钥匙 NO	亮色 Bright	199

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面单点锁 Panel Lock — SK1-061


[SK1-061]

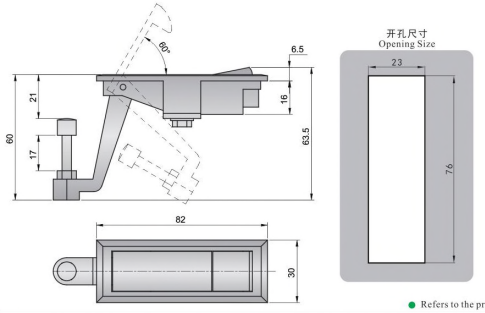

开孔尺寸 Opening Size

特点

- 具有压缩迫紧功能
- 微调螺母可调节门的迫紧程度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀砂铬
用　途 ● 机箱机柜、配电箱、电柜、工具箱柜
交货期 ● 常规产品. . . 敬请垂询

Features
- With compression and pressing function
- Adjust the door's compression degree by fine-tuning the nut
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Sand Chrome Plated

Application
- Equipment cabinet, Distribution box, Electrical cabinet, Tool cabinet

Date of delivery
- Common product inquiry is welcome

订货号 Item No.	2D	RoHS	重量(g) Weight(g)
SK1-061	2D	●	145

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock — SK1-078


[SK1-078]


锁片 Pawl


钥匙 Key

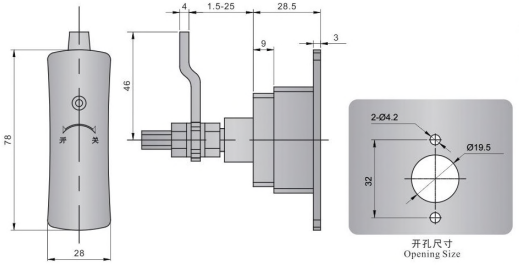

开孔尺寸 Opening Size

特点

- 具有压缩迫紧功能
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
　　● 适用于门板厚度：1.5-2.5mm
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . . 敬请垂询

Features
- With compression and pressing function
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Black Painted
- Suitable door thickness : 1.5-2.5mm

Application
- Control box, Power box, Chassis cabinet

Date of delivery
- Common product inquiry is welcome

订货号 Item No.	2D	H	重量(g) Weight(g)
SK1-078	2D	1.5-25	235

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock — SK1-086


[SK1-086-1]


[SK1-086-2]



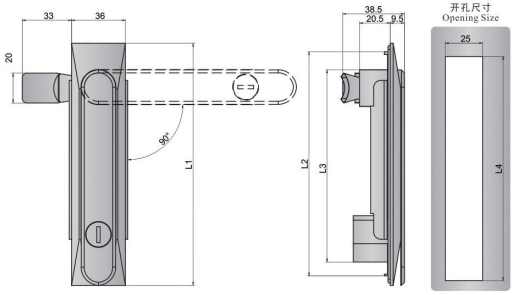

特点

- 调换锁片位置实现左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)或尼龙(PA)
　　● 表面处理：烤漆黑色或塑胶黑色
用　途 ● 机箱机柜、配电箱、控制柜
交货期 ● 常规产品. . . 敬请垂询

Features
- Exchanging pawl direction to realize left and right side opening

Specification
- Material: Zinc Alloy(ZDC) or Nylon(PA)
- Finish: Black painted or Black

Application
- Chassis cabinet, Distribution box, Control cabinet

Date of delivery
- Common product inquiry is welcome

订货号 Item No.	2D	RoHS	L1	L2	L3	L4	材质 Material	重量(g) Weight(g)
SK1-086-1	2D	●	160	150	128.5	150	锌合金 Zinc Alloy	438
SK1-086-2	2D	●	120	110	87.5	110	尼龙(PA) Nylon(PA)	181


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧门锁 Panel Lock — SK1-181



[SK1-181B]



[SK1-181W]





开孔尺寸
Opening Size





特点

- 具有压缩迫紧功能
- 左右开门兼用
- 调整锁片可适合不同门板厚度

规　格 ● 材　　质：锌合金(ZDC)．冷轧板(SPCC)
　　● 表面处理：烤漆黑色、镀亮铬
用　途 ● 电力箱、控制箱、自动化设备
交货期 ● 常规产品. . . 敬请垂询

Features

- With strong flex and compression force
- Suitable for left and right side opening
- Pawl can be adjusted for different door thickness

Specification

- Material:Zinc Alloy(ZDC),Cold Rolled Sheet(SPCC)
- Finish: Black Painted, Bright Chrome Plated

Application

- Power box, Control box, Automation equipment

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	颜色 Color	重量(g) Weight(g)
SK1-181B	●	2D	黑色 Black	200
SK1-181W	●	2D	亮色 Bright	200


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


单点锁 Handle Lock — SK1-071



[SK1-071W]


[SK1-071B]









开孔尺寸
Opening Size

特点

- 具有压缩迫紧功能
- 调整锁片可适合不同门板厚度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)、冷轧板(SPCC)
　　● 表面处理：镀亮铬、烤漆黑色
用　途 ● 机箱机柜、配电箱、电柜
交货期 ● 常规产品. . . 敬请垂询

Features

- With compression and pressing function
- Pawl can be adjusted for different door thickness
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC), Cold Rolled Sheet(SPCC)
- Finish:Bright Chrome Plated, Black Painted

Application

- Chassis cabinet, Distribution box, Electrical cabinet

Date of delivery

- Common product inquiry is welcome


订货号 Item No.	RoHS	CAD	颜色 Color	重量(g) Weight(g)
SK1-071B	●	2D	黑色 Black	132
SK1-071W	●	2D	亮色 Bright	129


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


把手锁 Handle Lock — SK1-091


[SK1-091]









开孔尺寸
Opening Size

特点

- 具有良好的迫紧锁定功能
- 可加装挂锁，起防盗功能
- 锁舌可根据需要选择不同止口高度

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 机箱机柜、配电箱、制造设备
交货期 ● 常规产品. . . 敬请垂询

Features

- With strong flex and compression force
- Padlock can be added with anti-theft function
- Bolt's different spigot height can be customized

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application

- Chassis cabinet, Distribution boxes, Manufacturing equipment

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-091	●	2D	250


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

把手锁 Handle Lock — SK1-108



[SK1-108L]


[SK1-108R]





开孔尺寸
Opening Size



特点

- 可供单点、两点、三点锁闭使用
- 可根据需要自行加挂锁

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . . 敬请垂询

Features

- Can used to single, two, three points latch
- Padlock can be added as required

Specification

- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application

- Control box, Power box, Chassis cabinet

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	CAD	D	重量(g) Weight(g)
SK1-108L	2D	Ø7.5	263
SK1-108R	2D	Ø7.8	263

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

把手锁 Handle Lock — SK1-305


[SK1-305S]



[SK1-305SK]



钥匙 Key





开孔尺寸 Opening Size





订货号 Item No.	RoHS	CAD	钥匙 Key	重量(g) Weight:(g)
SK1-305S	●	2D	无钥匙 NO	254
SK1-305SK	●	2D	有钥匙 YES	260

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 调换锁片位置可实现左右开门兼用
- 不锈钢材质，受力稳定，抗腐蚀性强
- 最大开启角度90度

规 格 ● 材 质：不锈钢(SUS316)
● 表面处理：拉丝抛光
用 途 ● 户外电力箱、控制箱、户外机柜等
交货期 ● 常规产品. . . 敬请垂询

Features

●Exchanging pawl direction to realize left and right side opening
●Pure Staninless, great corrrrosion resistance, force stable
●Low profile with 90 degree opening

Specification

●Material: Stainless Steel(SUS316)
●Finish: Wire-drawing Polishing


Application

●Control box;Power box;Chassis cabinet;etc.

Date of delivery

●Common product inquiry is welcome


安装示意 Installation Drawing



把手锁 Handle Lock — SK1-306S



[SK1-306S]



钥匙 Key






开孔尺寸 Opening Size







订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-306S	●	2D	260

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 调换锁片位置可实现左右开门兼用
- 不锈钢材质，耐腐蚀性能好
- 最大开启角度90度

规 格 ● 材 质：不锈钢(SUS304)
● 表面处理：拉丝抛光
用 途 ● 户外电力箱、控制箱、户外机柜等
交货期 ● 常规产品. . . 敬请垂询

Features

●Exchanging pawl direction to realize left and right side opening
●Stainless Steel material, great corrosion resistance performance
●Low profile with 90 degree opening

Specification

●Material: Stainless Steel(SUS304)
●Finish: Wire-drawing Polishing

Application

●Control box; Power box; Chassis cabinet; etc.


Date of delivery


●Common product inquiry is welcome


把手锁 Handle Lock — SK1-309A



[SK1-309AL]
[SK1-309AR]


钥匙 Key









开孔尺寸 Opening Size

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	重量(g) Weight:(g)
SK1-309AL	●	2D	左装 Left	280
SK1-309AR	●	2D	右装 Right	280

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 钥匙孔带防尘盖，起保护和美观作用

规 格 ● 材 质：锌合金(ZDC)
● 表面处理：镀亮铬
用 途 ● 控制箱、电力箱、机箱机柜等
交货期 ● 常规产品. . . 敬请垂询
备 注 ● 标配单点锁片，三点式锁片需另购

Features

●Key hole with dustproof cover, protective and beautiful

Specification

●Material: Zinc Alloy (ZDC)
●Finish: Bright Chrome Plated

Application

●Control box;Power box;Chassis cabinet;etc.

Date of delivery

●Common product inquiry is welcome


Remark

●Single-point pawl available, three-point pawl needs to purchase separately.


把手锁 Handle Lock — SK1-309A-1


[SK1-309A-1]



钥匙 Key




可调距离20.95
Adjustable Distance 20. 95









开孔尺寸 Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-309A-1	●	2D	500

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 钥匙孔带防尘盖，起保护和美观作用

规 格 ● 材 质：锌合金(ZDC)
● 表面处理：镀亮铬
用 途 ● 控制箱、电力箱、机箱机柜等
交货期 ● 常规产品. . . 敬请垂询
备 注 ● 标配单点锁片，三点式锁片需另购

Features

●Key hole with dustproof cover, protective and beautiful
●Two types of left and right side opening

Specification

●Material:Zinc Alloy(ZDC)
●Finish: Bright Chrome Plated

Application

●Control box;Power box;Chassis cabinet;etc.

Date of delivery

●Common product inquiry is welcome

Remark


●Single-point pawl available, three-point pawl needs to purchase separately.


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

把手锁 Handle Lock — SK1-309S-1





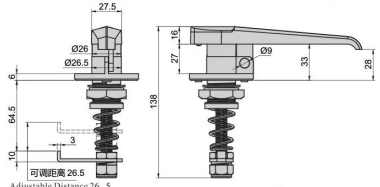



特点

- 钥匙孔带防尘盖，起保护和美观作用
- 锁止口高度可以调节

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 户外电力箱、控制箱、户外机柜等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 标配单点锁片，三点式锁片需另购

Features

- Key hole with dustproof cover, protective and beautiful
- Bolt's spigot height can be adjusted

Specification

- Material:Stainless Steel(SUS304)
- Finish:Bright Polishing

Application

- Control box;Power box;Chassis cabinet;etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Single-point pawl available, three-point pawl needs to purchase separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-309S-1R	●	2D	519
SK1-309S-1L	●	2D	519


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

把手锁 Handle Lock — SK1-309S-2





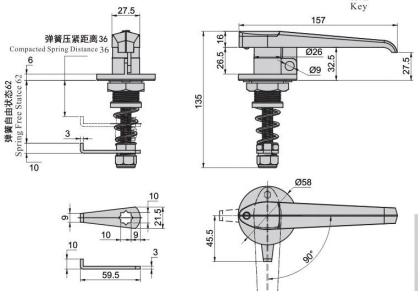



特点

- 钥匙孔带防尘盖，起保护和美观作用
- 有左开门和右开门两种型号

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 户外电力箱、控制箱、户外机柜等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 标配单点锁片，三点式锁片需另购

Features

- Key hole with dustproof cover, protective and beautiful
- Two types of left and right side opening

Specification

- Material:Stainless Steel(SUS304)
- Finish:Bright Polishing

Application

- Control box;Power box;Chassis cabinet;etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Single-point pawl available, three-point pawl needs to purchase separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-309S-2R	●	2D	530
SK1-309S-2L	●	2D	530

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

把手锁 Handle Lock — SK1-309S-3





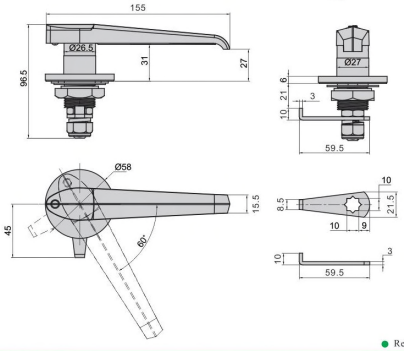



特点

- 钥匙孔带防尘盖，起保护和美观作用
- 锁止口高度可以调节

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 户外电力箱、控制箱、户外机柜等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 标配单点锁片，三点式锁片需另购

Features

- Key hole with dustproof cover, protective and beautiful
- Bolt's spigot height can be adjusted

Specification

- Material:Stainless Steel(SUS304)
- Finish:Bright Polishing

Application

- Control box;Power box;Chassis cabinet;etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Single-point pawl available, three-point pawl needs to purchase separately

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-309S-3R	●	2D	450
SK1-309S-3L	●	2D	450


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

把手锁 Handle Lock — SK1-310





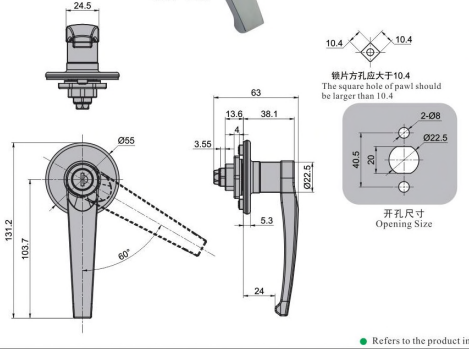

特点

- 可供单点、两点、三点锁闭使用
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 控制箱、电力箱、机箱机柜
交货期 ● 常规产品. . .敬请垂询

Features

- Can be used with single, two points and three points paw
- Suitable for left and right side opening

Specification

- Material:Zinc Alloy (ZDC)
- Finish:Bright Chrome Plated

Application

- Control box;Power box; Chassis cabinet

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-310	●	2D	261

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


把手锁 Handle Lock — SK1-312




[SK1-312-1]



[SK1-312-2]



[SK1-312-1]



[SK1-312-2]

特点

- 有带钥匙、无钥匙和带挂锁等型号
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 箱体、配电盘、车辆门板等
交货期 ● 常规产品. . . 敬请垂询

Features

- With padlock, with key and without key etc types
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Cabinet, Distribution panel, Vehicle door etc

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	CAD	结构功能 Structure Function
SK1-312-1	2D	带锁芯 With cylinder
SK1-312-2	2D	无锁芯 Without cylinder
SK1-312-2A-L	2D	无锁芯，带挂锁装置 without cylinder, with padlock
SK1-312-2A-R	2D	无锁芯，带挂锁装置 without cylinder, with padlock

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

把手锁 Handle Lock — SK1-314




[SK1-314-1]



[SK1-314-2]



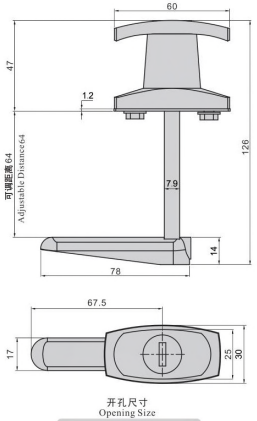

特点

- 有带钥匙, 不带钥匙两种型号可选
- 旋转T型把手即可开门

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 箱体、配电盘、车辆门板等
交货期 ● 常规产品. . . 敬请垂询

Features

- With key and without key two types can be chosen
- Rotating T-handle to open

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Cabinet, Distribution panel, Vehicle door etc

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	CAD	结构功能 Structure Function	重量(g) Weight(g)
SK1-314-1	2D	带锁芯 With cylinder	263
SK1-314-2	2D	无锁芯 Without cylinder	//

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

把手锁 Handle Lock — SK1-315




[SK1-315-1]




[SK1-315-2]





[SK1-315-1]



[SK1-315-2]

特点

- 有带钥匙、不带钥匙两种型号可选
- 旋转T型把手即可开门

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 电力箱、控制箱、自动化设备
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 左右开门兼用

Features

- With key and without key two types can be chosen
- Rotating T-handle to open

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Power box, Control box, Automation equipment

Date of delivery

- Common product inquiry is welcome

Remark

- Suitable for left and right side opening

订货号 Item No.	CAD	结构功能 Structure Function	重量(g) Weight(g)
SK1-315-1		带锁芯 With cylinder	295
SK1-315-2		无锁芯 Without cylinder	296
SK1-315-2A-L		无锁芯，带挂锁装置 without cylinder, with padlock	//
SK1-315-2A-R		无锁芯，带挂锁装置 without cylinder, with padlock	//

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


把手锁 Handle Lock — SK1-317S



[SK1-317S]



钥匙 Key

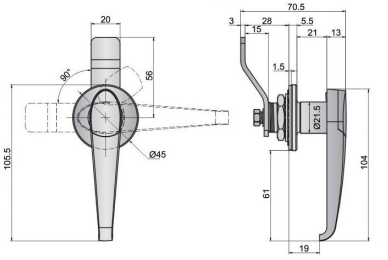

特点

- 锁体带防尘滑盖，起保护和美观作用
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 高等电力箱、控制箱、自动化设备及各种恶劣环境使用的箱体
交货期 ● 常规产品. . . 敬请垂询

Features

- With dustproof cover, protective and beautiful
- Stainless Steel material, great corrosion resistance performance

Specification

- Material: Stainlss Steel(SUS304)
- Finish: Wire-drawing Polishing

Application

- High-end Power Boxes; Control boexs; Automation equipment and a variety of harsh environmental cabinet; etc

Date of delivery

- Common product inquiry is welcome


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-317S	●	2D	270

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

连杆锁多点锁闭组合示意图

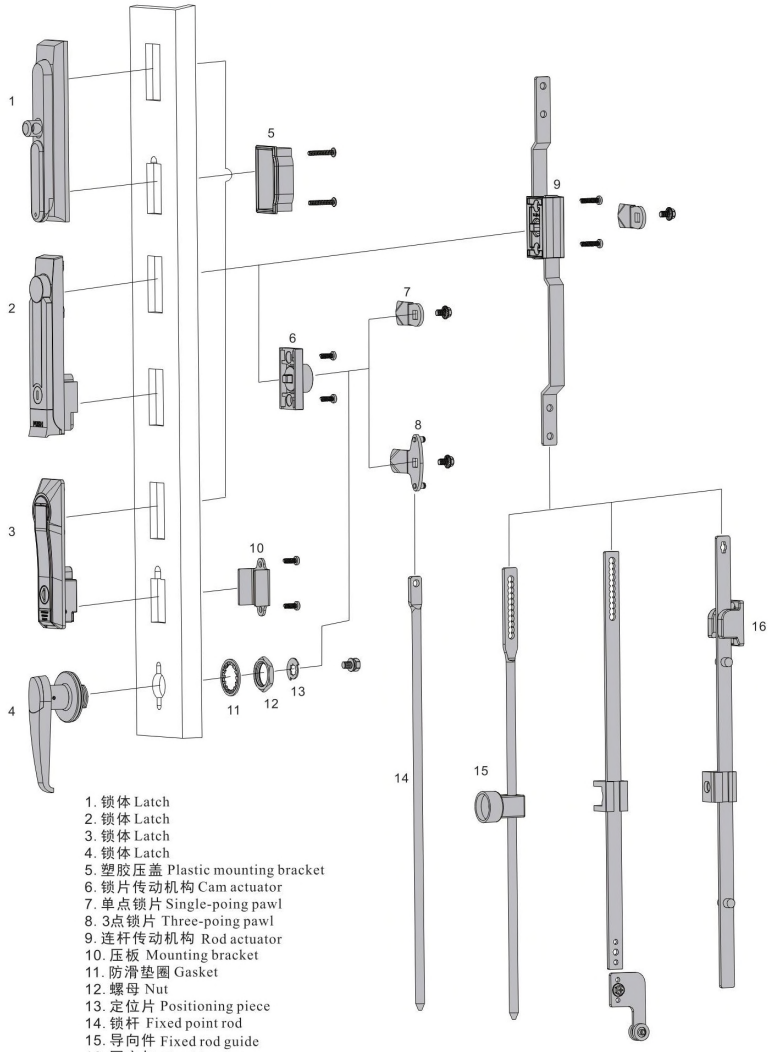

1. 锁体 Latch
2. 锁体 Latch
3. 锁体 Latch
4. 锁体 Latch
5. 塑胶压盖 Plastic mounting bracket
6. 锁片传动机构 Cam actuator
7. 单点锁片 Single-poing pawl
8. 3点锁片 Three-poing pawl
9. 连杆传动机构 Rod actuator
10. 压板 Mounting bracket
11. 防滑垫圈 Gasket
12. 螺母 Nut
13. 定位片 Positioning piece
14. 锁杆 Fixed point rod
15. 导向件 Fixed rod guide
16. 固定扣 Fixed keeper

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

连杆锁Multi-Point Lock

NEW CAD RoHS **SK1-LGS001**


[SK1-LGS001]


[1-LGS001-28]

特点

- 通过选配锁杆和迫紧座可实现多点锁闭
- 开闭快捷，安装简易
- 防水等级IP55

规　格 ● 材　　质：锌合金+不锈钢(SUS304)
　　● 表面处理：烤漆黑色
用　途 ● 户外机柜、储能柜等
交货期 ● 常规产品…敬请垂询

Features

- With optional rod and bases,multi-point locking can be achieved
- Easy to open and close,simple installation
- waterproof grade IP55

Specification


- Material:Zinc Alloy (ZDC) + Stainless Steel (SUS304)
- Finish: Black Painted


Application

- Outdoor cabinets; Energy storage cabinets; etc.


Date of delivery

- Common product inquiry is welcome

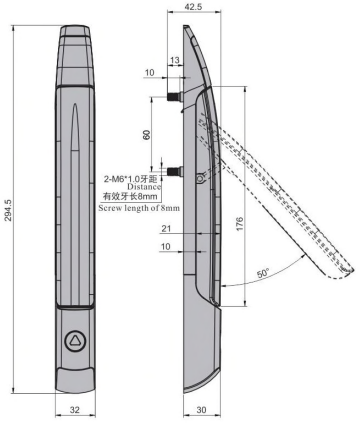



开孔尺寸
Opening Size

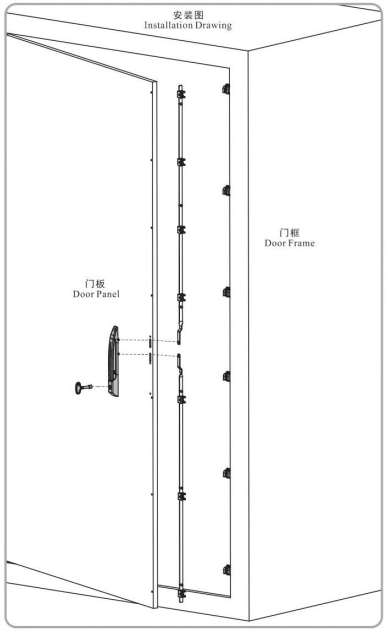

配件订货号 Accessory No.	CAD	RoHS	重量(g) Weight(g)
1-LGS001-28	2D	●	50

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-LGS001	2D	●	680

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock

NEW CAD RoHS **SK1-LG1**



[SK1-LG1]

特点

- 可快速拆装，方便快捷
- 打开手柄后90度旋转实现开启和关闭
- 传动条可拆除，用作单点锁使用
- 具有密封防水功能
- 调换传动条位置和锁片方向可左右兼用

规　格 ● 材　　质：锁体为塑胶材质，传动件铝合金+不锈钢(SUS304)
● 表面处理：塑胶黑色，电泳黑色，SUS304本色
用　途 ● 控制箱，电力箱，测试箱体等
交货期 ● 常规产品…敬请垂询
备　注 ● 客户根据自身箱体高度选配锁杆
● 左右兼用，需调换位置前要清楚部件之间装配关系，否则容易装配不成功

Features

- Quickly opening, easy to install
- Rotating the handle with 90 degree to open or close
- Transmission strips can be removed as single point lock using
- With waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening

Specification

- Material: Body : Plastic; Transmission strips : Aluminum Alloy + Stainless Steel(SUS304)
- Finish: Black

Application


- Control box; Power box; Communication cabinet; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- According to the box height you can choose connecting rod as your requirement
- Before changing the left-opening or right-opening type, it is necessary to know the assembly relationship between the parts, otherwise the assembly will be unsuccessful

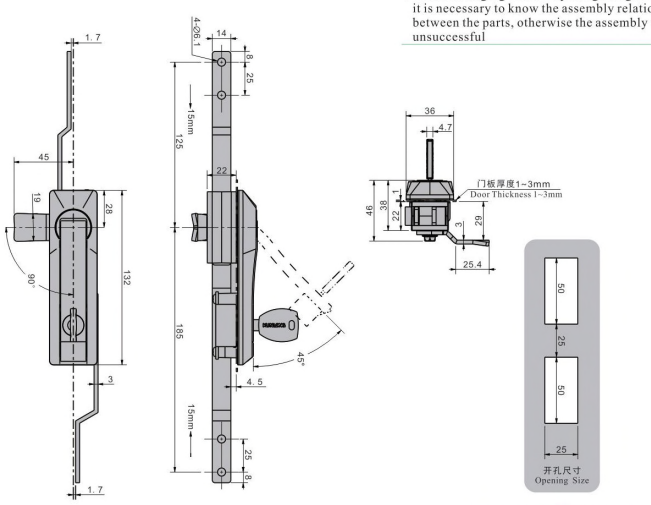

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
SK1-LG1	2D	●	305

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock

NEW CAD RoHS **SK1-LG2**

门锁系列 SK1

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle



[SK1-LG2]

特点

- 可快速拆装，方便快捷
- 打开手柄后90度旋转实现开启和关闭
- 传动锁杆可拆除，用作单点锁使用
- 具有密封防水功能
- 调换锁片方向可左右兼用

规　格 ● 材　　质：锁体为塑胶材质，铝合金传动件+铁锁片
● 表面处理：塑胶黑色，电泳黑色
用　途 ● 控制箱，电力箱，测试箱体等
交货期 ● 常规产品…敬请垂询
备　注 ● 客户根据自身箱体高度选配锁杆
● 左右兼用，需调换位置前要清楚部件之间装配关系，否则容易装配不成功

Features

- Quickly opening, easy to install
- Rotating the handle with 90 degree to open or close
- Transmission strips can be removed as single point lock using
- With waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening

Specification

- Material: Body : Plastic; Transmission strips : Aluminum Alloy ; Pawl: Steel
- Finish: Black

Application


- Control box; Power box; Communication cabinet; etc.


Date of delivery

- Common product inquiry is welcome

Remark

- According to the box height you can choose connecting rod as your requirement
- Before changing the left-opening or right-opening type, it is necessary to know the assembly relationship between the parts, otherwise the assembly will be unsuccessful

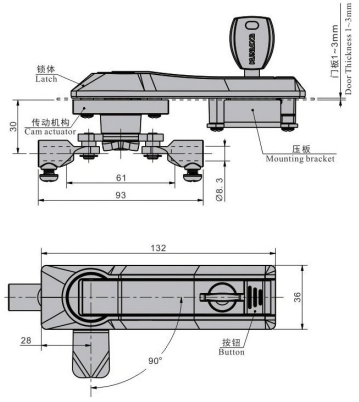

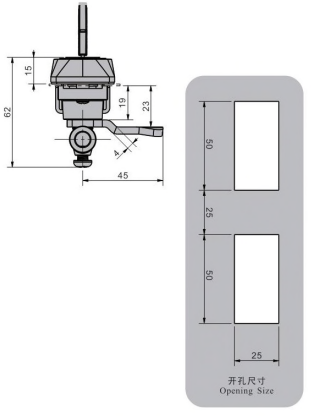

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
SK1-LG2	2D	●	230

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁 Multi-Point Lock

SK1-081-2


[SK1-081-2]

特点

- 锁体带防尘滑盖，起保护和美观作用
- 通过选配锁杆及附件，可实现三点式锁闭

规　格 ● 材　　质：尼龙(PA)
　　● 表面处理：塑胶黑色
用　途 ● 机箱机柜、配电箱、电力箱
交货期 ● 常规产品. . .敬请垂询

Features

- With dustproof cover, protective and beautiful
- With optional rod and accessories, three-point locking can be achieved

Specification


- Material: Nylon(PA)
- Finish:Black

Application

- Equipment cabinet, Distribution box, Power box

Date of delivery

- Common product inquiry is welcome

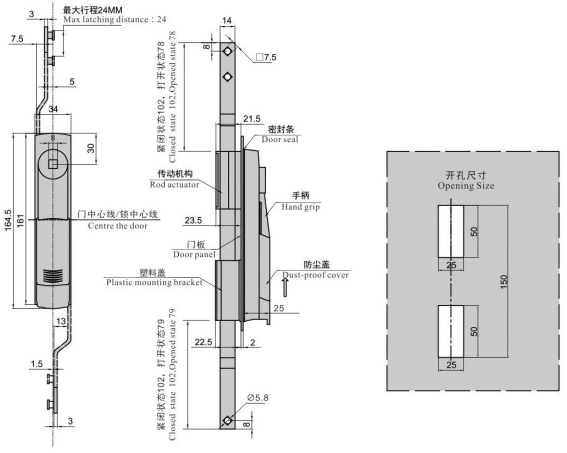


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-081-2	●	2D	379

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁 Multi-Point Lock

SK1-028


[SK1-028W]　[SK1-028B]

特点

- 通过选配锁杆及附件，可实现三点式锁闭

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆银色、烤漆黑色
　　● 调换中间锁片方向可实现左右兼用
用　途 ● 控制箱、电力箱、通讯机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 客户根据自身箱体高度自配连杆

Features

- With optional rod and accessories, three-point locking can be achieved

Specification

- Material:Zinc Alloy(ZDC)
- Finish: Silver Painted,Black Painted
- Exchange pawl position to realize left and right side opening

Application


- Control box, Power box, Communication cabinet

Date of delivery

- Common product inquiry is welcome

Remark

- According to the box height you can choose connecting rod as your requirement

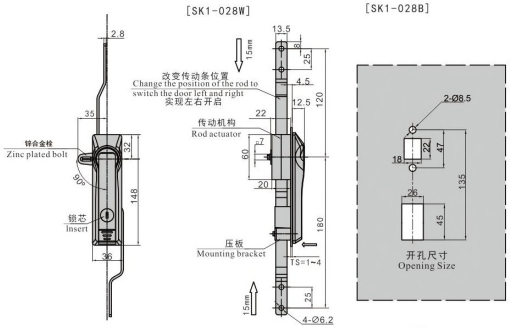


订货号 Item No.	CAD	重量(g) Weight(g)
SK1-028Ⅱ	2D	528
SK1-028B	2D	544

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock

SK1-080

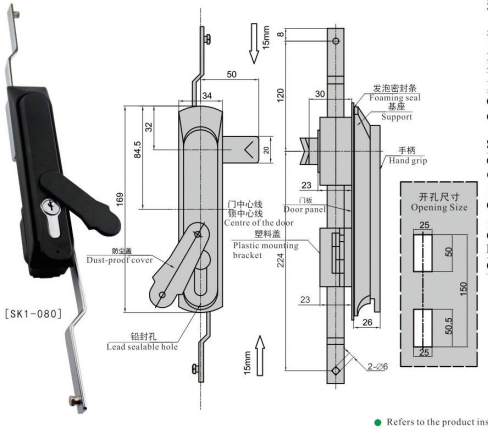

特点

- 锁体带防尘盖，起保护和美观作用
- 通过选配锁杆及附件，可实现三点式锁闭

规　格 ● 材　　质：尼龙(PA)
　　● 表面处理：黑色
操　作 ● 旋转钥匙的同时将钥匙提起，即可开门
用　途 ● 箱体、配电盘、车辆门板
交货期 ● 常规产品. . .敬请垂询

Features

- With dustproof cover, protective and beautiful
- With optional rod and accessories, three-point locking can be achieved

Specification

- Material:Nylon(PA)
- Finish: Black

Operation

- Turn the key, while the key lift and open the door

Application

- Cabinet, Disribution panel, vehicle door


Date of delivery

- Common product inquiry is welcome


订货号 Item No.	CAD	重量(g) Weight(g)
SK1-080	2D	419

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock SK1-083-2B

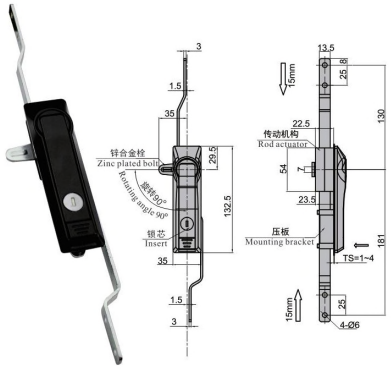

[SK1-083-2B]



特点

- 通过选配锁杆及附件，可实现三点式锁闭

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 控制箱、电力箱、通讯机柜等
交货期 ● 常规产品. . .敬请垂询

Features

- With optional rod and accessories, three-point locking can be achieved

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application

- Control box,Power box,Communication cabinet;etc

Date of delivery


- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-083-2B	●	2D	520

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock SK1-085-3

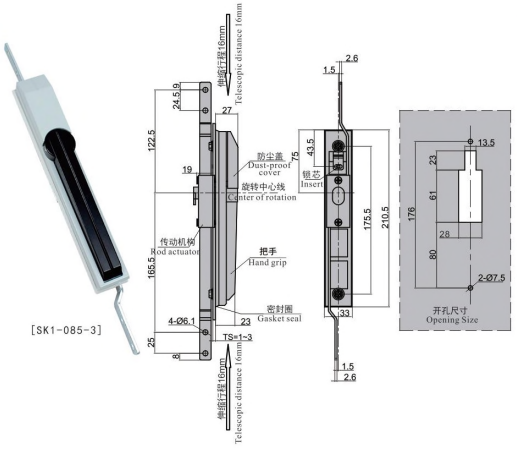

[SK1-085-3]

特点

- 锁体带防尘滑盖，起保护和美观作用
- 通过选配锁杆及附件，可实现三点式锁闭

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色、烤漆银色
用　途 ● 机箱机柜、配电箱、通讯机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 可用于户外通信机柜

Features

- With dustproof cover, protective and beautiful
- With optional rod and accessories, three-point locking can be achieved

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted, Silver Painted

Application

- Chassis cabinet, Distribution box, Communication cabinet

Date of delivery

- Common product inquiry is welcome

Remark

- Used to outdoor communication cabinet

订货号 Item No.	RoHS	CAD	钥匙 Key	重量(g) Weight:(g)
SK1-085-3	●	2D	有钥匙 YES	665

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock SK1-090



[SK1-090]

特点

- 传动条可拆除，用作单点锁定使用
- 传动体作压板用，具有密封防水功能
- 调换传动条位置和锁片方向可左右兼用

规　格 ● 材　　质：锌合金(ZDC)．冷轧板(SPCC)
　　● 表面处理：烤漆银色
用　途 ● 机箱机柜、配电箱、网络机柜
交货期 ● 常规产品. . .敬请垂询
备　注 ● 在拆除或改变传动条位置时，需要清楚部件之间的相互连接关系，否则容易装配不成功

Features

- Transmission strips can be removed as single point lock using
- Transmission body use as drive plate, with waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening

Specification

- Material: Zinc Alloy(ZDC), Cold Rolled Sheet(SPCC)
- Finish: Silver Painted

Application


- Chassis cabinet, Distribution box, Network cabinet

Date of delivery

- Common product inquiry is welcome

Remark

- Need to know about interconnection relationship of components when removing or changing the transmission.otherwise can not match

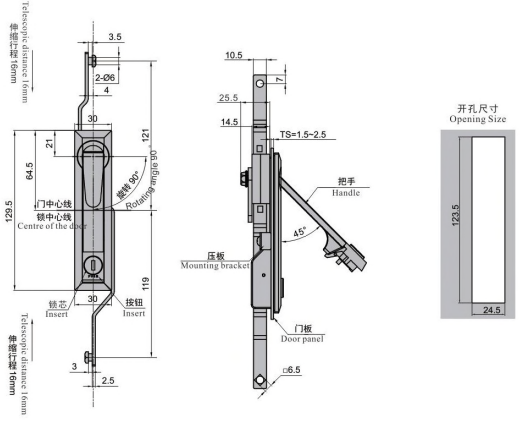

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-090	●	2D	335

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

连杆锁Multi-Point Lock

NEW CAD RoHS **SK1-029**



[SK1-029-1]



[SK1-029-2]

特点

- 开启手柄旋转90°通过传动机构实现开门或关门
- 止口高度23mm，门板厚1～3mm，上下连杆伸缩距离15
- 上下连杆拆除后可做单点锁定使用
- 传动体做压板用，具有密封防水功能
- 调换上下连杆和锁片方向可左右兼用

规　格 ● 材　　质：锌合金锁体、传动壳;碳钢锁片、上下连杆
● 表面处理：锁体(烤漆黑色)，传动壳/锁片(镀锌)
用　途 ● 控制箱，电力箱，通讯机柜等
交货期 ● 常规产品…敬请垂询

Features

- Rotating the handle at 90 degrees, through the transmission mechanism to open or close
- Spigot height: 23mm, Panel thickness : 1.0-3.0mm, Telescopic distance :15mm
- After the connecting rod is removed, it can be used as a single-point latching
- Transmission body use as drive plate, with waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening

Specification


- Material: Body and Transmission shell: Zinc Alloy(ZDC) Pawl and connecting rod: Carbon Steel
- Finish: Body and Transmission shell:Black Painted; Pawl and connecting rod:Zinc Plated

Application


- Control box; Power box; Communication cabinet;etc.


Date of delivery

- Common product inquiry is welcome

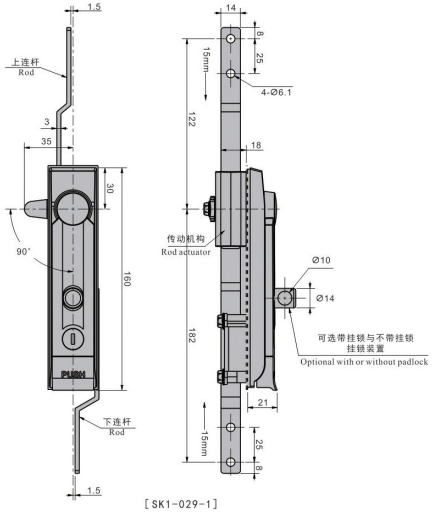

[SK1-029-1]





订货号 Item No.	RoHS	CAD	挂锁 Padlock	重量(g) Weight(g)
SK1-029-1	●	2D	带挂锁位 YES	637
SK1-029-2	●	2D	不带挂锁位 NO	600

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock

NEW CAD RoHS **SK1-033-1**



[SK1-033-2]

[SK1-033-1]

特点

- 开启手柄旋转90°通过传动机构实现开门或关门
- 止口高度23mm，门板厚1～3，上下连杆伸缩距离15mm
- 上下连杆拆除后可做单点锁定使用
- 传动体做压板用，具有密封防水功能
- 调换上下连杆和锁片方向可左右兼用
- 带挂锁位

规　格 ● 材　　质：锌合金锁体、传动壳;碳钢锁片、上下连杆
● 表面处理：锁体(烤漆黑色)，传动壳/锁片(镀锌)
用　途 ● 控制箱，电力箱，通讯机柜等
交货期 ● 常规产品…敬请垂询

Features

- Rotating the handle at 90 degrees, through the transmission mechanism to open or close
- Spigot height: 23mm, Panel thickness : 1.0-3.0mm, Telescopic distance :15mm
- After the connecting rod is removed, it can be used as a single-point latching
- Transmission body use as drive plate, with waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening
- Padlock can be added

Specification


- Material: Body and Transmission shell: Zinc Alloy (ZDC); Pawl and connecting rod: Carbon Steel
- Finish: Body and Transmission shell: Black Painted; Pawl and connecting rod: Zinc Plated


Application


- Control box; Power box; Communication cabinet;etc.

Date of delivery

- Common product inquiry is welcome

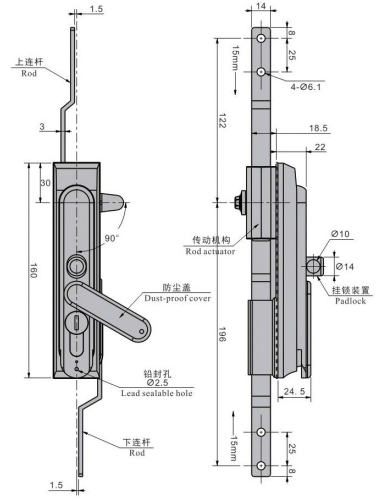





订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-033-1	2D	●	717
SK1-033-2	2D	●	756.6

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连杆锁Multi-Point Lock

SK1-034-1



[SK1-034-1]

特点

- 开启手柄旋转180° 通过传动机构实现开门或关门
- 门板厚1～3mm，上下连杆伸缩距离30mm
- 上下连杆拆除后可做单点锁定使用
- 传动体做压板用，具有密封防水功能
- 调换上下连杆和锁片方向可左右兼用

规 格 ● 材 质：不锈钢(SUS304)
● 表面处理：拉丝抛光
用 途 ● 控制箱，电力箱，通讯机柜等
交货期 ● 常规产品…敬请垂询

Features

- Rotating the handle at 180 degrees, through the transmission mechanism to open or close
- Panel thickness : 1.0-3.0mm, Telescopic distance :30mm
- After the connecting rod is removed, it can be used as a single-point latching
- Transmission body use as drive plate, with waterproof sealing
- Transmission strips position and pawls direction suitable for left or right opening

Specification


- Material: Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing


Application


- Control box; Power box; Communication cabinet;etc.

Date of delivery

- Common product inquiry is welcome

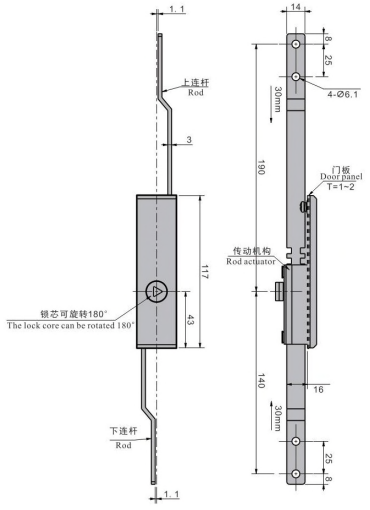





订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-034-1	2D	●	387


● :RoHS对应产品 ▲ :RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

选配件 Accessory

R1-01



[R1-01]



特点

规 格 ● 材 质：尼龙（PA）
● 表面处理：黑色
用 途 ● 适用于3*14mm扁锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
R1-01	2D	●	6.6


● :RoHS对应产品 ▲ :RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

选配件 Accessory

R1-02



[R1-02]



特点

规 格 ● 材 质：尼龙（PA）
● 表面处理：黑色
用 途 ● 适用于3*14mm扁锁杆或带滚轮扁锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
R1-02	2D	●	7


● :RoHS对应产品 ▲ :RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

选配件 Accessory

R1-03



[R1-03]



特点

规 格 ● 材 质：尼龙（PA）
● 表面处理：黑色
用 途 ● 适用于3*14mm扁锁杆或带滚轮扁锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
R1-03	2D	●	10.2


● :RoHS对应产品 ▲ :RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-04**



[R1-04]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于3*14mm扁锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
R1-04	2D	●	4.8

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-05**



[R1-05-1]　[R1-05-2]　[R1-05-3]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于Φ8.0mm圆连杆，高度有24mm、30mm、34mm、三种规格可选
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	A	B	重量(g) Weight:(g)
R1-05-1	2D	●	32	24	18
R1-05-2	2D	●	38	30	16
R1-05-3	2D	●	42	34	18

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-06**



[R1-06]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于Φ8.0mm圆锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
R1-06	2D	●	8

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-07**



[R1-07]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：本色
用　途 ● 适用于Φ8.0mm圆锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
R1-07	2D	●	4

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-08**



[R1-08]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于Φ8.0mm带滚轮圆锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
R1-08	2D	●	10.9

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory

NEW CAD RoHS **R1-09**



[R1-09]



特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于Φ8.0mm圆锁杆
交货期 ● 常规产品…敬请垂询

订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
R1-09	2D	●	0.5

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory — R1-10

特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：本色
用　途 ● 适用于Φ8.0 mm圆连杆
交货期 ● 常规产品…敬请垂询


[R1-10]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R1-10	2D	●	8.8


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory — R1-11

特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于带孔圆锁杆
交货期 ● 常规产品…敬请垂询


[R1-11]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R1-11	2D	●	4.5


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory — R1-12

特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于带滚轮连杆
交货期 ● 常规产品…敬请垂询


[R1-12]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R1-12	2D	●	5.8


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

导向件 Accessory — R1-13

特点

规　格 ● 材　　质：尼龙（PA）
● 表面处理：黑色
用　途 ● 适用于3*14mm扁锁杆
交货期 ● 常规产品…敬请垂询


[R1-13]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R1-13	2D	●	5.8


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧座 Accessory — R2-01

特点

规　格 ● 材　　质：锌合金
● 表面处理：烤漆黑色
用　途 ● 适用于带锁销扁连杆
交货期 ● 常规产品…敬请垂询


[R2-01]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R2-01	2D	●	58


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

连接头 Accessory — R3-01

特点

规　格 ● 材　　质：锌合金
● 表面处理：镀锌
用　途 ● 适用于Φ8.0mm圆锁杆
交货期 ● 常规产品…敬请垂询


[R3-01]



订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
R3-01	2D	●	14


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory — SG-Y10-1000

特点

规　格 ● 材　　质：镀锌圆钢
● 表面处理：镀锌
用　途 ● 镀锌圆钢锁杆，带白色尼龙滚轮，扁尾带孔
交货期 ● 常规产品…敬请垂询
备　注 ● 订购时请注明锁杆L长度


[SG-Y10-1000]



订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y10-1000	2D	●	1000	//


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-B01-1-1000

特点

规　格 ● 材　　质：镀锌扁钢
　　● 表面处理：镀锌
用　途 ● 可调节PA滚轮扁锁杆，每调一孔可移动5mm
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

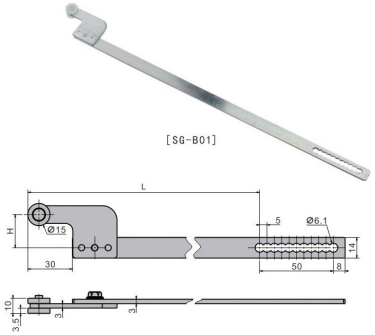

订货号 Item No.	2D	RoHS	H	L	重量(g) Weight:(g)
SG-B01-1-1000	2D	●	18.5	1000	//
SG-B01-2-L	2D	●	22.5	定制	
SG-B01-3-L	2D	●	27.5		
SG-B01-4-L	2D	●	35		

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-B02-1000

特点

规　格 ● 材　　质：镀锌扁钢
　　● 表面处理：镀锌
用　途 ● 带PA滚轮扁连杆
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

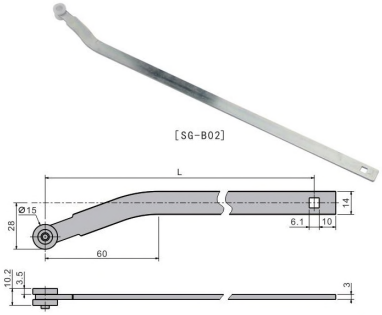

订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-B02-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-B03-1000

特点

规　格 ● 材　　质：镀锌扁钢
　　● 表面处理：镀锌
用　途 ● 卡式扁连杆
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

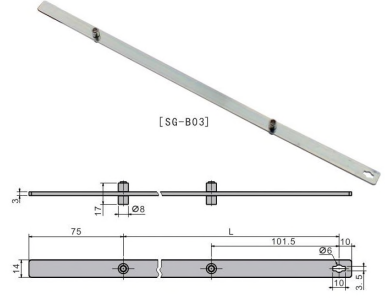

订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-B03-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y01-1000

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 可调节PA滚轮，每调一孔可移动5mm
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制



订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y01-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y02-1000

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 带锥头锁杆，适用于连杆连接件
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

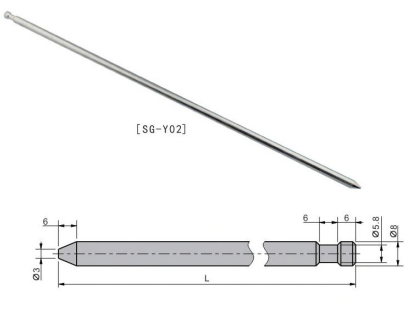

订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y02-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y03-1000

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 适用于圆孔锁杆，带白色PA滚轮
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

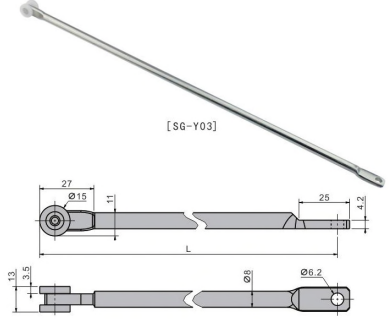


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y03-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y04-1000

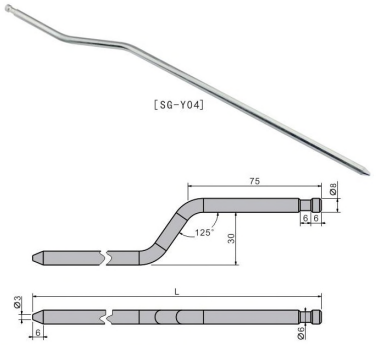

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 适用于连杆连接件
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y04-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y05-1000

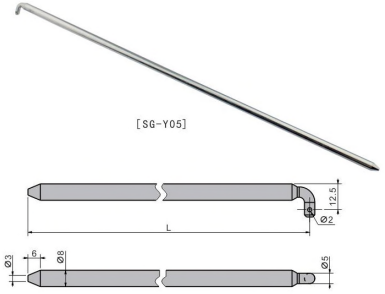

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 适用于销子卡孔固定
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y05-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y06-1000



特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 可调节圆钢锥头锁杆，每调一孔可移动5mm
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y06-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y07-1000

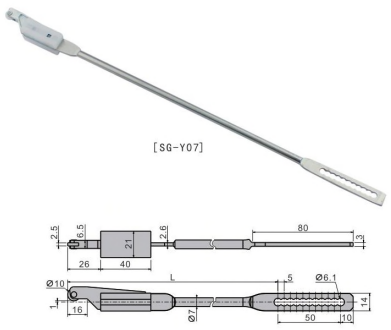

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 可调锁杆，锌合金连接头带PA滚轮，每移动一孔可调节5mm
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y07-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y08-1000

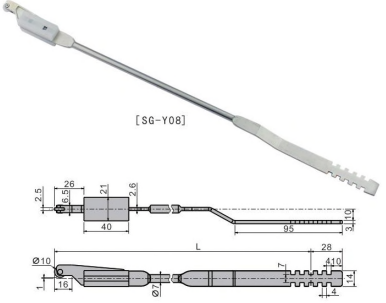

特点

规　格 ● 材　　质：镀锌扁钢
　　● 表面处理：镀锌
用　途 ● 适用于直连主体
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制


订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y08-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

锁杆 Accessory

SG-Y09-1000

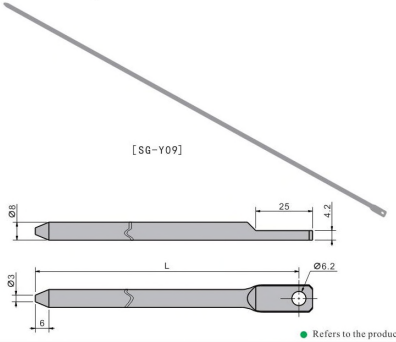

特点

规　格 ● 材　　质：镀锌圆钢
　　● 表面处理：镀锌
用　途 ● 镀锌圆钢锥头带圆孔锁杆
交货期 ● 常规产品…敬请垂询
备　注 ● 锁杆L长度可定制

订货号 Item No.	2D	RoHS	L	重量(g) Weight:(g)
SG-Y09-1000	2D	●	1000	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

平面锁 Panel Lock

NEW CAD RoHS **SK1-S0005**



[SK1-S0005]

特点

● 三点锁定，也可单点锁定
● 厚重，具有强力锁定功能

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 机箱机柜、配电箱、电力箱等
交货期 ● 常规产品…敬请垂询

Features

●Three points latching, also can be single point latching
●Heavy, with a strong latching function

Specification


●Material: Zinc Alloy (ZDC)
●Finish: Black Painted

Application

●Chassis cabinet; Distribution box; Power box;etc.

Date of delivery

●Common product inquiry is welcome

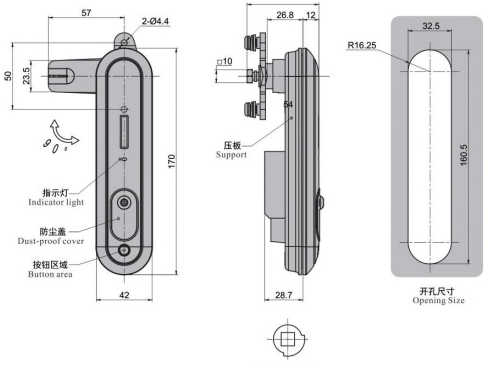

变换限位块方向
可切换左右开门　Change the direction of the limit block to switch the door left and right

电子锁使用说明：
1、额定电压DC12V，额定电流250-300mA（通电时长不要超过40秒）；
2、红线为锁控制线正极，蓝线为锁控制线负极；
3、绿线，黄线组成锁状态信号线，锁打开时信号线为断开状态，锁关闭时信号线为接通状态；
4、控制方式：电子锁可以和各种控制器相连接，通过控制器来控制锁的开启和关闭，控制线不供电时锁关闭，通电时开启电子锁，电子锁不能长时间通电。

Instruction:

1.Rated voltage DC12V, rated current 250-300mA (power on for no more than 40 seconds);
2.The red line control the positive pole, and the blue line control negative pole;
3.The green line and the yellow line constitute the lock state signal line. When the lock is opened, the signal line is disconnected, and when the lock is closed, the signal line is connected;
4.Control mode: electronic lock can be connected with a variety of controllers, through the controller to control the opening and closing of the lock, the lock is closed when the control line is not powered, the lock is opened when the control line is powered, Electronic locks cannot be energized for long periods of time.

安装要求：
1、门锁在门上的安装过程中，不得敲击门锁，以免损坏门锁零件、操作人员需戴手套；
2、安装时门板需保持水平，柜门固定孔须与锁体外形相对，不可用重力敲打锁体，不可用化学物质擦拭锁体表面以防电镀层腐蚀；
3、安装后锁体保持平面度和垂直度，门锁与门板安装接口处无须涂防水胶就能够达到IPX6的防水等级。

Installation requirements:

1.When the lock is installed on the door, do not knock the lock, in case of damaging the lock components, operators need to wear gloves;
2.When installing, the door plate should be kept level. The fixed hole of the cabinet door should be relative to the shape of the lock body. It is not allowed to knock the lock body by gravity or wipe the surface of the lock body with chemical substances to prevent corrosion of the electroplating;
3.After installation, the lock body maintains flatness and verticality, and the installation interface of the door lock and door panel can reach the IPX6 waterproof level without applying waterproof glue.

开启步骤：
1、控制器对电子锁控制线通电后，手柄上的指示灯（绿灯）闪烁；
2、按动手柄下方的圆圈位置，手柄自动弹起，（如果不按，绿灯一直闪烁等待开启，直到控制线断）；
3、旋转手柄，带动钢栓，连杆等锁闭机构运动完成开启动作。

Opening steps:

1. After the controller is powered on the electronic lock control line, the indicator light (green light) on the handle flashes;
2. Press the circle below the handle and the handle will automatically spring up (if not, the green light will blink until the control line is disconnect);
3. Rotate the handle to drive the locking mechanism such as steel bolt and connecting rod to complete the opening action.

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-S0005	●	2D	790

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch

CAD RoHS **SK1-008**



[SK1-008]

特点

● 外观小巧，美观
● 撞击式关门结构，开关门省力轻便
● 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
操　作 ● 用单手指拉动手柄开启
用　途 ● 小型机箱、机柜、配电箱、控制侧门
交货期 ● 常规产品…敬请垂询
备　注 ● 开启简单，具有良好的锁定功能

Features

●Small and exquisite,beautiful
●Impact type closing structure, easy to open and close
●Suitable for left and right side opening

Specification

●Material: Zinc Alloy(ZDC)
●Finish: Bright Chrome Plated

Operation

●Opening the handle with single finger

Application


●Mini chassis cabinet, Distribution box, Control side door


Date of delivery


●Common product inquiry is welcome

Remark


●Easy to open, with great latching function







安装图
Installation Drawing



订货号 Item No.	CAD	RoHS	重量(g) Weight:(g)
SK1-008	2D	●	138


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

机罩锁 Paddle Latch — SK1-738



[SK1-738W]



[SK1-738B]





开孔尺寸
Opening Size





特点

- 抗振动、抗冲击等性能强
- 采用单点锁定形式

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色或者烤漆银色
用　途 ● 工程车、特种车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 请定期在转动部位上涂抹润滑油

Features

- Strong anti vibration, anti shock performance
- Using single point latching

Specification

- Material: Cold Rolled Sheet(SPCC)
- Finish: Black Painted or Silver Painted

Application

- Engineering vehicle; Special vehicle; Vibration equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Please put lubricating oil in the rotating part regularly

订货号 Item No.	RoHS	重量(g) Weight(g)
SK1-738Ⅱ	●	513
SK1-738B	●	514


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch — SK1-738-2B



[SK1-738-2B]







开孔尺寸
Opening Size



特点

- 抗振动、抗冲击等性能强
- 采用单点锁定形式
- 适合安装于小型设备使用

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 工程车、特种车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 请定期在转动部位上涂抹润滑油

Features

- Strong anti vibration, anti shock performance
- Using single point latching
- Suitable for the mini equipment

Specification

- Material: Cold Rolled Sheet(SPCC)
- Finish: Black Painted

Application

- Engineering vehicle; Special vehicle; Vibration equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Please put lubricating oil in the rotating part regularly


订货号 Item No.	2D	RoHS	重量(g) Weight(g)
SK1-738-2B	2D	●	228


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


机罩锁 Paddle Latch — SK1-740



[SK1-740]











特点

- 可调节锁点高度, 对箱体有压缩迫紧功能
- 防水防尘, 外观精美大气

规　格 ● 材　　质：外壳/尼龙(PA), 手柄/锌合金
　　● 表面处理：外壳/黑色, 手柄/烤漆黑色
用　途 ● 工程车、特种车、静音发电机
交货期 ● 常规产品. . . 敬请垂询

Features

- Adjustable latching point height, have compression force for cabinet
- Waterproof and dust-proof, elegant appearance

Specification

- Material: Shell:Nylon(PA), Handle:Aluminum Alloy
- Finish: Shell:Black, Handle:Black Painted

Application

- Engineering vehicle, Special vehicle, Soundproof generator

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	2D	重量(g) Weight(g)
SK1-740	2D	603


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


机罩锁 Paddle Latch — SK1-830-3





[SK1-830-3]









开孔尺寸
Opening Size

特点

- 四孔安装，更可靠地安装在振动设备上
- 锁芯带防尘盖
- 手柄T型结构设计，方便操作

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 工程车、特种车、振动设备
交货期 ● 常规产品. . . 敬请垂询

Features

- Four holes installation, reliable install in the vibration equipment
- Cylinder with dust-proof cover
- T-handle design, easy to operate

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Engineering vehicle; Special vehicle; Vibration equipment

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	2D	RoHS	重量(g) Weight(g)
SK1-830-3	2D	●	501

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

机罩锁 Paddle Latch

RoHS 不锈钢 CAD **SK1-830-B**



[SK1-830-B]

特点

- 四孔安装，更可靠地安装在振动设备上
- 手柄T型结构设计，方便操作
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 工程车、特种车、振动设备
交货期 ● 常规产品. . 敬请垂询

Features

- Four holes installation, reliable install in the vibration equipment
- T-handle design, easy to operate
- Stainless Steel material, great corrosion resistance performance

Specification


- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Engineering vehicle; Special vehicle; Vibration equipment

Date of delivery

- Common product inquiry is welcome

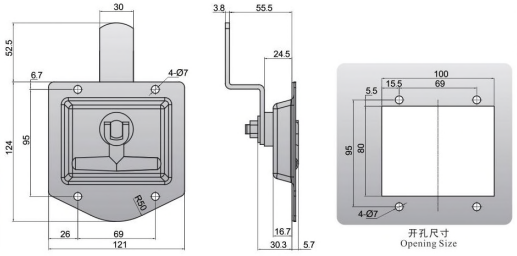

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-830-B	2D	●	435

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch

CAD RoHS **SK1-1009**



[SK1-1009B]　[SK1-1009W]

特点

- 采用柔和的圆弧设计
- 单触操作即可开闭

规　格 ● 材　　质：锌合金(ZDC)+冷轧板(SPCC)
　　● 表面处理：烤漆黑色/烤漆银色，镀锌
用　途 ● 工程车、特种车、建筑机械、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 由于插销与手柄联动,从而可以确认门是否完全关闭

Features

- Using soft circular arc design
  Single-touch operation can be opened and closed

Specification

- Material: Zinc Alloy(ZDC)+Cold Rolled Sheet(SPCC)
- Finish: Black Painted/Silver Painted, Zinc Plated

Application


- Engineering vehicle; Special vehicle;
  Construction machinery; Vibration equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Confirm whether the door is completely closed for the bolt interact with handle

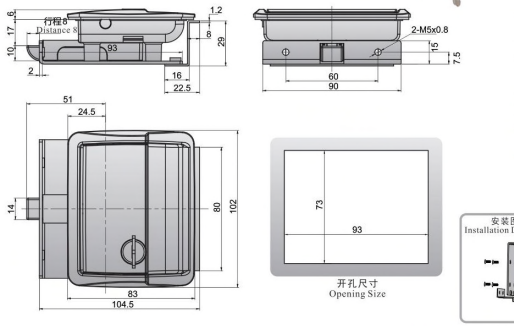

订货号 Item No.	CAD	RoHS	颜色 Color	重量(g) Weight(g)
SK1-1009B	2D	●	黑色 Black	518
SK1-1009W	2D	●	亮色 Bright	518

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

机罩锁 Paddle Latch

CAD RoHS **SK1-5003**



[SK1-5003]

特点

- 平面型手柄,带锁芯锁定
- 具有强力锁定功能

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features

- Flat-handle with cylinder latching
- With strong latching performance

Specification

- Material: Cold Rolled Sheet(SPCC)
- Finish: Black Painted

Application


- Modified vehicle; Special vehicle;
  Vibration equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Please put lubricating oil in the rotating part regularly to ensure it durable

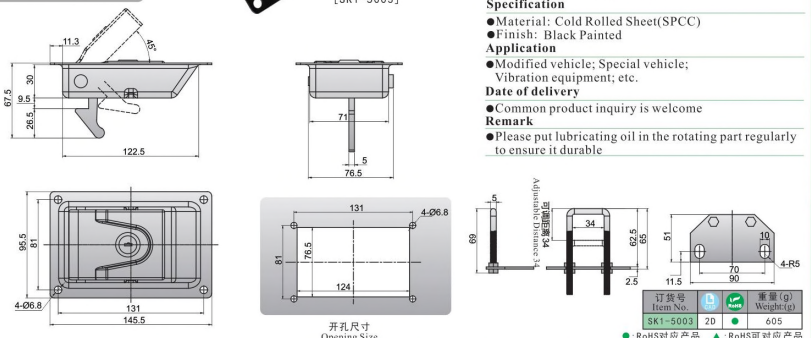

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-5003	2D	●	605

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch

CAD **SK1-5004**



[SK1-5004]　[SK1-5004-1]

特点

- 平面型手柄,带锁芯锁定
- 座子可调节,适合不同的锁定高度

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features

- Flat-handle with cylinder latching
- Base can be adjusted, suitable for different latching height

Specification

- Material: Cold Rolled Sheet(SPCC)
- Finish: Black Painted

Application


- Modified vehicle; Special vehicle;
  Vibration equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Please put lubricating oil in the rotating part regularly to ensure it durable

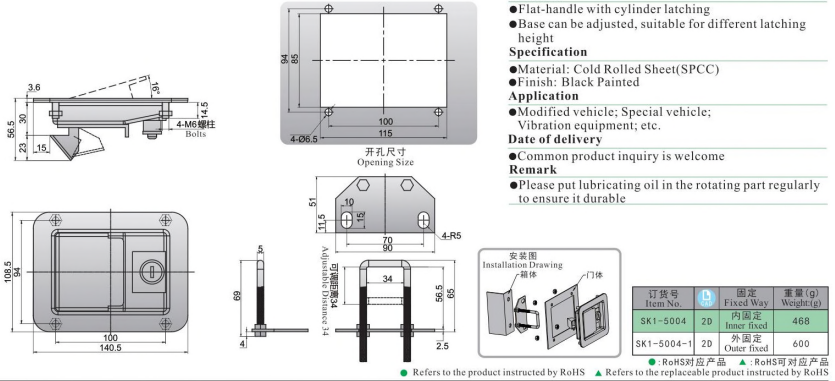

订货号 Item No.	CAD	固定 Fixed Way	重量(g) Weight(g)
SK1-5004	2D	内固定 Inner fixed	468
SK1-5004-1	2D	外固定 Outer fixed	600


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


机罩锁 Paddle Latch


SK1-5004-3P


[SK1-5004-3P]









特点

- 平面型手柄，带锁芯锁定
- 三点锁闭结构
- 有带挂锁型号可选

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- Three point latching
- With Paddle Lock product can be chosen

Specification
- Material:Cold Rolled Sheet(SPCC)
- Finish:Black Painted

Application
- Modified vehicle. Special vehicle. Vibration equipment

Date of delivery
- Common product inquiry is welcome

Remark
- Please put lubricating oil in the rotating part regularly ensure it durable


订货号 Item No.		重量(g) Weight(g)
SK1-5004-3P	2D	784


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


SK1-5005


[SK1-5005]


钥匙
Key







特点

- 平面型手柄，带锁芯锁定

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching

Specification
- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application
- Modified vehicle.Special vehicle.Vibration equipment

Date of delivery
- Common product inquiry is welcome

Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable


订货号 Item No.		重量(g) Weight(g)
SK1-5005	2D	490


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch

SK1-5008


[SK1-5008]

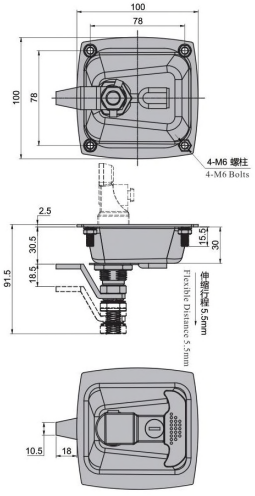



特点

- 平面型手柄，带锁芯锁定
- 具有压缩迫紧功能

规　格 ● 材　　质：冷扎板锁壳、锌合金提手
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- With compression and pressing function

Specification
- Material: Cold Rolled Sheet(SPCC) Lock
  Zinc Alloy (ZDC) handle
- Finish:Black Painted

Application
- Modified vehicle.Special vehicle.Vibration equipment

Date of delivery
- Common products inquiry is welcome


Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable


订货号 Item No.		重量(g) Weight(g)
SK1-5008	2D	558


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

SK1-5009


[SK1-5009]







特点

- 平面型手柄，带锁芯锁定
- 单点锁闭结构

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- Single latching

Specification
- Material:Zinc Alloy(ZDC)
- Finish:Black Painted

Application
- Modified vehicle.Special vehicle.Vibration equipment


Date of delivery
- Common products inquiry is welcome


Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable

订货号 Item No.		重量(g) Weight(g)
SK1-5009	2D	455

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch — SK1-5010

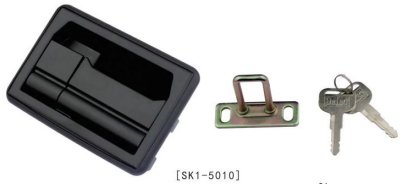
[SK1-5010]

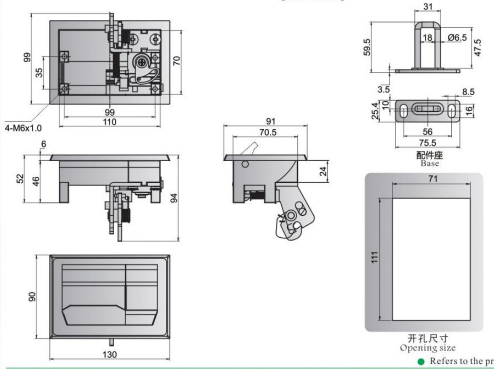

特点

- 平面型手柄, 带锁芯锁定
- 锁芯带有防尘盖
- 单点锁闭结构

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- Cylinder with dust-proof cover
- Single latching

Specification
- Material: Zinc Alloy (ZDC)
- Finish:Black Painted

Application
- Modified vehicle,Special vehicle,Vibration equipment

Date of delivery
- Common products inquiry is welcome


Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable

订货号 Item No.		重量(g) Weight:(g)
SK1-5010	2D	619

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch — SK1-50013


[SK1-50013]

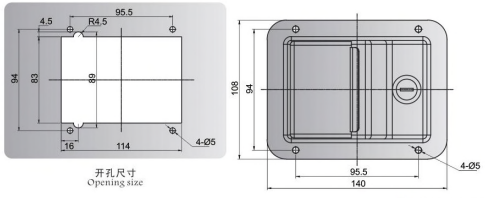

特点

- 平面型手柄, 带锁芯锁定
- 内置弹簧结构，方便开启和关闭

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- Innerspring structure, easy to open and close

Specification
- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application
- Modified vehicle,Special vehicle,Vibration equipment

Date of delivery
- Common products inquiry is welcome


Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable

订货号 Item No.		重量(g) Weight:(g)
SK1-50013	2D	431

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

机罩锁 Paddle Latch — SK1-50030


[SK1-50030]

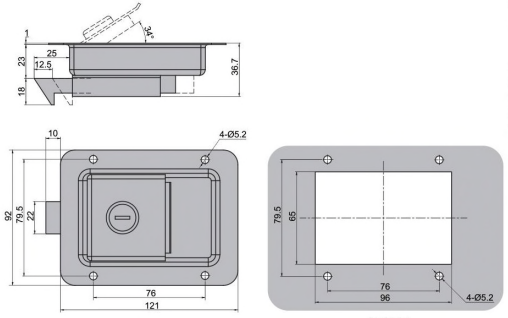

特点

- 平面型手柄, 带锁芯锁定
- 内置弹簧结构，方便开启和关闭

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 特种车、改装车、振动设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 为确保产品经久耐用，请定期在转动部位涂抹润滑剂

Features
- Flat-handle with cylinder latching
- Innerspring structure, easy to open and close

Specification
- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application
- Modified vehicle,Special vehicle,Vibration equipment

Date of delivery
- Common product inquiry is welcome


Remark
- Please put lubricating oil in the rotating part regularly to ensure it durable


订货号 Item No.		重量(g) Weight:(g)
SK1-50030	2D	420

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

侧装把手 Handle Latch — SK1-603


[SK1-603]



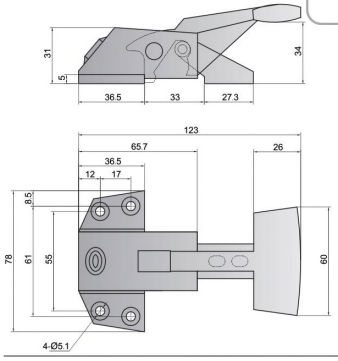

特点

- 配带锁芯, 单点锁定
- 内置弹簧结构, 方便开启和关闭
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 烤箱、试验箱、测试箱体
交货期 ● 常规产品. . . 敬请垂询

Features
- With cylinder,Single latching
- Innerspring structure, easy to open and close
- Suitable for left and right side opening

Specification
- Material:Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application
- Oven, Test chamber

Date of delivery
- Common product inquiry is welcome


订货号 Item No.			重量(g) Weight:(g)
SK1-603	●	2D	335


● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


冷库把手 Handle Latch

SK1-075









特点

- 内置弹簧结构，开启或关闭门轻松
- 凸门安装，安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻柜、小冰柜、蒸饭柜、烤箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Innerspring structure, easy to open and close
- Convex door installation, base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezer; Small freezer; Steaming cabinet; Industrial oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-075	●	2D	414


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


冷库把手 Handle Latch

SK1-076







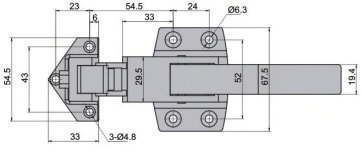

特点

- 内置弹簧结构，开启或关闭门轻松
- 凸门安装，安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻柜、小冰柜、蒸饭柜、烤箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Innerspring structure, easy to open and close
- Convex door installation, base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezer; Small freezer; Steaming cabinet; Industrial oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-076	●	2D	245

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧门把手 Handle Latch

SK1-093-1



特点

- 具有压缩迫紧功能
- 20万次的疲劳测试

规　格 ● 材　　质：锌合金(ZDC)或不锈钢(SUS304)
　　● 表面处理：镀亮铬/烤漆黑色
　　拉丝抛光/镜面抛光
用　途 ● 工业隔音箱、试验箱、工业设备、烤箱
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 可定制不同表面处理

Features

- With compression and pressing function
- The testing of opening and closing function for 200,000 times

Specification

- Material:Zinc Alloy(ZDC),Stainless Steel(SUS304)
- Finish:Bright Chrome Plated,Black Painted Wire-drawing Polishing, Bright Polishing,

Application


- Industrial soundproof box, Test chamber, Industrial equipment, Oven


Date of delivery

- Common product inquiry is welcome


Remark


- Surface treatment can be customized






SK1-093-1

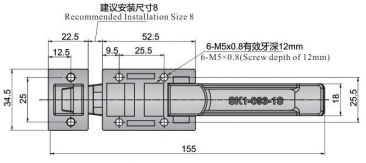



SK1-093-1S



订货号 Item No.	RoHS	CAD	材质 Material	表面处理 Finish	重量(g) Weight(g)
SK1-093-1	●	2D	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	366
SK1-093-1B	●	2D	锌合金 Zinc Alloy	烤漆黑色 Black Painted	360
SK1-093-1S	●	2D	不锈钢 Stainless Steel	拉丝抛光 Wire-drawing Polishing	490
SK1-093-1SY	●	2D	不锈钢 Stainless Steel	镜面抛光 Bright Polishing	491

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧门把手 Handle Latch

SK1-093-3


[SK1-093-3]


[SK1-093-3SK]


1-093-3-5DD


1-093-3S-5PG


1-093-3S-5C-PG


1-093-3-9DD


1-093-3-9SPG


1-093-3S-5B-PG

特点

- 具有压缩密闭功能
- 20万次疲劳测试
- 可根据箱体结构选择迫紧座

规　格 ● 材　　质：锌合金(ZDC)或不锈钢(SUS304)
　　● 表面处理：镀亮铬或拉丝抛光
用　途 ● 工业屏蔽箱，工业密封门，金属3D打印烧结设备
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 可定制不同表面处理

Features

- With strong flex and compression force
- The testing of opening and closing function for 200,000 times
- According to the structure of equipment to choose bases

Specification

- Material:Zinc Alloy (ZDC),Stainless Steel(SUS304)
- Finish:Bright Chrome Plated,Wire-drawing Polishing

Application


- Industrial shielded box, Industrial Sealing doors, 3D sintering equipment


Date of delivery

- Common product inquiry is welcome

Remark

- Surface treatment can be customized





订货号 Item No.	RoHS	CAD	结构功能 Structure Function	材质 Material	重量(g) Weight(g)
SK1-093-3	●	2D	无锁芯 Without cylinder	锌合金 Zinc Alloy	630
SK1-093-3K	●	2D	带锁芯 With cylinder	锌合金 Zinc Alloy	626
SK1-093-3S	●	2D	无锁芯 Without cylinder	不锈钢 Stainless steel	752
SK1-093-3SK	●	2D	带锁芯 With cylinder	不锈钢 Stainless steel	744

● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS


配件订货号 Accessory No.	RoHS	CAD	迫紧座 Base	材质 Material	表面处理 Finish	重量(g) Weight(g)
1-093-3-5DD	●	2D	单开座	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	//
1-093-3-9DD	●	2D	对开座	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	//
1-093-3S-5PG	●	2D	单开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	//
1-093-3S-5C-PG	●	2D	单开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	//
1-093-3S-5B-PG	●	2D	对开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	//
1-093-3-9SPG	●	2D	对开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	//


● :RoHS对应产品 ▲ :RoHS可对应产品


● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

迫紧门把手 Handle Latch

SK1-093-5


[SK1-093-5]



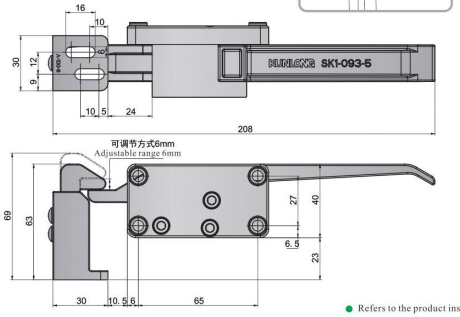

特点

- 具有压缩迫紧功能
- 20万次的疲劳测试

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆银色
用　途 ● 工业隔音箱、试验箱　工业设备、烤箱
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 可定制不同表面处理

Features

- With strong flex and compression force
- The testing of opening and closing function for 200,000 times

Specification

- Material:Zinc Alloy(ZDC)
- Finish:Silver Painted

Application

- Industrial soundproof box, Test chamber, Industrial equipment, Oven

Date of delivery

- Common product inquiry is welcome

Remark

- Surface treatment can be customized


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-093-5	●	2D	528


● :RoHS对应产品 ▲ :RoHS可对应产品


● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

撞击式门把手 Handle Latch

SK1-093-2S


[SK1-093-2S]



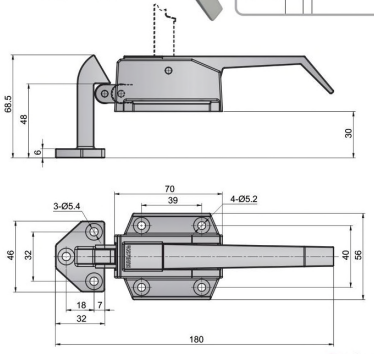

特点

- 撞击式关门结构，开关门省力轻便
- 20万次的疲劳测试

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 工业隔音箱、试验箱、工业设备、烤箱
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 可定制不同表面处理

Features

- Impact type closing structure, easy to open and close
- The testing of opening and closing function for 200,000 times

Specification

- Material: Stainless Steel(SUS304)
- Finish: Bright Polishing

Application

- Industrial soundproof box, Test chamber, Industrial equipment, Oven

Date of delivery

- Common product inquiry is welcome

Remark

- Surface treatment can be customized


订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-092-2S	●	2D	398


● :RoHS对应产品 ▲ :RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-778


[SK1-778]



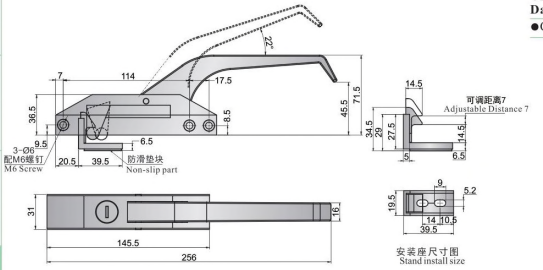

特点
- 安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻库门、医疗设备、厨房设备
交货期 ● 常规产品. . . 敬请垂询

Features
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application
- Freezer door;Medical equipment;Kitchen equipment

Date of delivery
- Common product inquiry is welcome


订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-778	●	2D	720


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-791


[SK1-791]



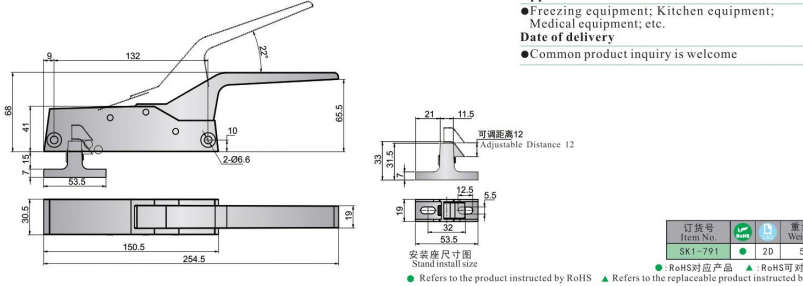

特点
- 安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、厨房设备、医疗设备等
交货期 ● 常规产品. . . 敬请垂询

Features
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application
- Freezing equipment; Kitchen equipment; Medical equipment; etc.

Date of delivery
- Common product inquiry is welcome


订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-791	●	2D	560


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-3-0680


[SK1-3-0680]





特点
- 安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . . 敬请垂询

Features
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application
- Freezing equipment; Refrigerated cabinet; Oven; etc.

Date of delivery
- Common product inquiry is welcome


订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-3-0680	●	2D	410


●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

二次开把手 Handle Latch — SK1-0681


[SK1-0681]
Patent No.: ZL 2010 2 0196437.4





特点
- 二次开门式专利设计
- 避免开启时因温度或压力过高伤及操作人员

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 高温烤箱、试验箱、恒温恒湿箱
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 配黑色胶塞

Features
- Twice opening patent design
- Prevent the high temperature or pressure to hurt the worker when opening

Specification
- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application
- High-temperature oven; Testing cabinet; Temperature humidity cabinet

Date of delivery
- Common product inquiry is welcome

Remark
- With black rubber plug

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-0681	●	2D	820

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

撞击式门把手 Handle Latch

SK1-1030S-N



特点

- 座子高度可调，适用于不同厚度门板
- 左右开门兼用
- 不锈钢材质，耐腐蚀性能好
- 撞击式关门结构，开关门省力轻便

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 工业烤箱、试验箱等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 适用门板厚度请参考详细尺寸

Features

- Base height can be adjusted, suitable for different door thickness
- Suitable for left and right side opening
- Stainless Steel material, great corrosion resistance performance
- Impact type closing structure, easy to open and close

Specification

- Material: Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing

Application


- Industrial Oven, Test Equipment, etc.

Date of delivery


- Common product inquiry is welcome

Remark


- For the door thickness, please refer to the detailed drawing

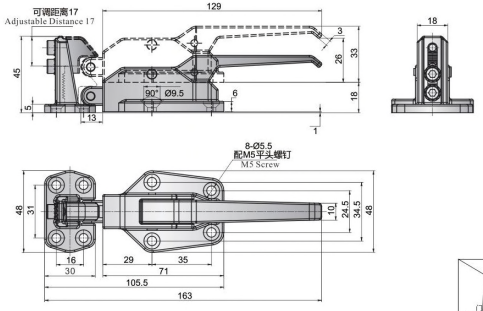

[A-1030S]+[SK1-1030S-N]

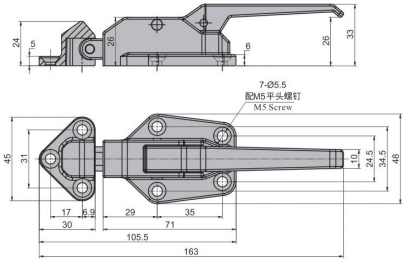

[B-1030S-1]+[SK1-1030S-N]

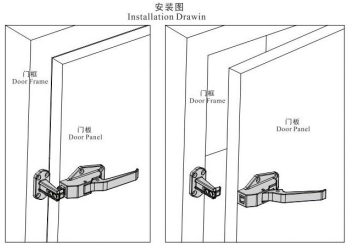

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-1030S-N	●	2D	313
A-1030S	●	2D	86
B-1030S-1	●	2D	41

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

撞击式门把手 Handle Latch

SK1-1060S



特点

- 座子高度可调，适用于不同厚度门板
- 左右开门兼用
- 不锈钢材质，耐腐蚀性能好
- 撞击式关门结构，开关门省力轻便

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 工业烤箱、试验箱等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 适用门板厚度请参考详细尺寸

Features

- Base height can be adjusted, suitable for different door thickness
- Suitable for left and right side opening
- Stainless Steel material, great corrosion resistance performance
- Impact type closing structure, easy to open and close

Specification

- Material: Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing

Application


- Industrial Oven, Test Equipment, etc.

Date of delivery


- Common product inquiry is welcome

Remark


- For the door thickness, please refer to the detailed drawing

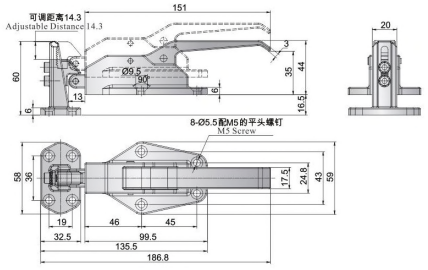

[A-1060S]+[SK1-1060S]

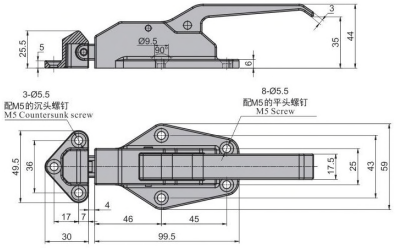

[B-1060S-1]+[SK1-1060S]

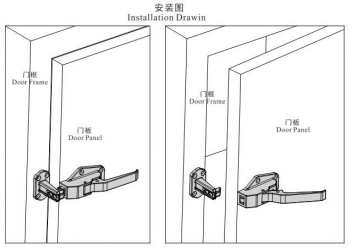

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-1060S	●	2D	328
A-1060S	●	2D	//
B-1060S-1	●	2D	//

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-1050S



[SK1-1050S]

特点

- 撞击式结构，开关门省力轻便
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻库、厨房设备、冰柜等
交货期 ● 常规产品. . .敬请垂询

Features

- Impact type closing structure, easy to open and close
- Suitable for left and right side opening

Specification


- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated


Application


- Freezing equipment; Kitchen equipment; Freezer; etc.

Date of delivery

- Common products inquiry is welcome







订货号 Item No.	RoHS	包	重量(g) Weight(g)
SK1-1050S	●	20	2900

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-BS1



[SK1-BS1]

特点

- 撞击式关门结构，开关门省力轻便
- 内部装有磁铁，有自吸闭门功能
- 调节座可滑移跟升降两种方式调节
- 可实现快速拆装的功能，方便快捷
- 手柄最大开启角度8°
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷库，机柜，测试箱体等
交货期 ● 常规产品…敬请垂询

Features

- Impact type closing structure, easy to open and close
- Inner with magnet, and closed by magnet attraction
- Base with sliding and lifting two adjusted ways
- Assembling fast,easy to install
- The maximum opening angle of the handle is 8°
- Suitable for left and right side opening

Specification


- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated


Application


- Cold storage; Cabinet; Test chamber;etc.


Date of delivery


- Common product inquiry is welcome

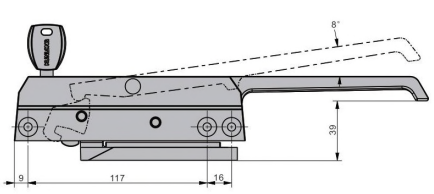













订货号 Item No.	RoHS	包	重量(g) Weight(g)
SK1-BS1	●	20	778

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-1178

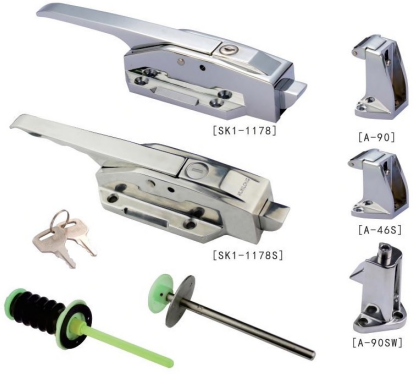

特点

- 有高矮两种座子可选
- 座子高度可调节
- 附内开逃生装置

规　格 ● 材　　质：锌合金(ZDC)或不锈钢(SUS304)
　　● 表面处理：镀亮铬或镜面抛光
用　途 ● 组合式冷冻库、干燥库、步入式实验室
交货期 ● 常规产品，敬请垂询
备　注 ● 左右开门兼用

Features

- With height and flat base can be chosen
- Base height can be adjusted
- With internal opening escape device

Specification

- Material:Zinc Alloy(ZDC) / Stainless Steel (SUS304)
- Finish: Bright Chrome Plated / Bright Polishing

Application


- Combined freezer; Dry library; Walk-in lab


Date of delivery


- Common product inquiry is welcome


Remark

- Suitable for left or right side opening


















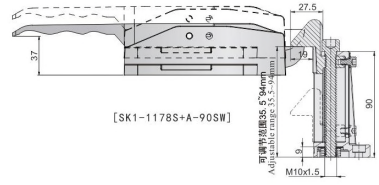









冷库把手 Handle Latch SK1-1178

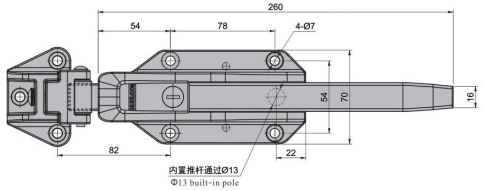










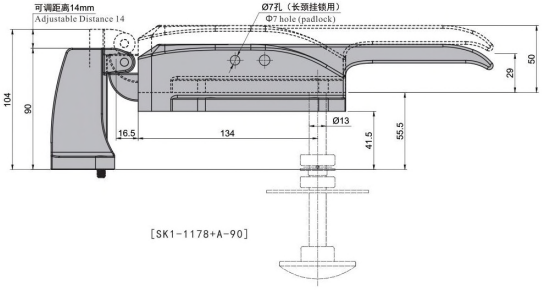



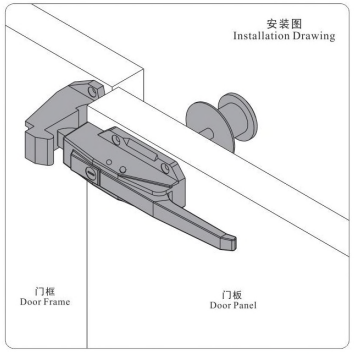



订货号 Item No.	RoHS	CAD	材质 Material	重量(g) Weight:(g)
SK1-1178	●	2D	锌合金 Zinc alloy	1073
SK1-1178S	●	2D	不锈钢 Stainless steel	1504
A-46	●	2D	锌合金 Zinc alloy	279
A-90	●	2D	锌合金 Zinc alloy	487
A-46S	●	2D	不锈钢 Stainless steel	323
A-90S	●	2D	不锈钢 Stainless steel	506
A-90SW	●	2D	不锈钢 Stainless steel	587


● : RoHS对应产品　▲ : RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-1200


[SK1-1200]


[SK1-1200B]

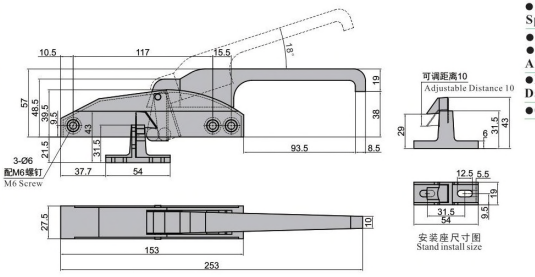



特点

- 撞击式关门结构，开关门省力轻便
- 座子高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . .敬请垂询

Features

- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer, Oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	2D	RoHS	钥匙 Key	重量(g) Weight(g)
SK1-1200	2D	●	有钥匙 Yes	591
SK1-1200B	2D	●	无钥匙 No	560


● : RoHS对应产品　▲ : RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-1240


[SK1-1240]


[SK1-1240B]

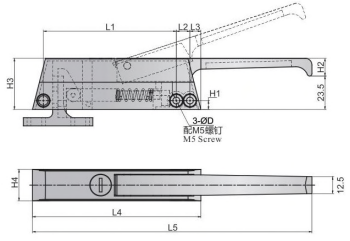



特点

- 撞击式关门结构，开关门省力轻便
- 座子高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . .敬请垂询

Features

- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer, Oven; etc.

Date of delivery

- Common product inquiry is welcome


订货号 Item No.	2D	RoHS	L1	L2	L3	L4	L5	H1	H2	H3	H4	D	重量(g) Weight:(g)
SK1-1240	2D	●	105	11	10.5	136.5	240	9.5	15	38.5	24	6.5	497
SK1-1240B	2D	●	97.5	10	8	123	202	6.5	13	38.5	23	5	413


● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-1250


[SK1-1250]

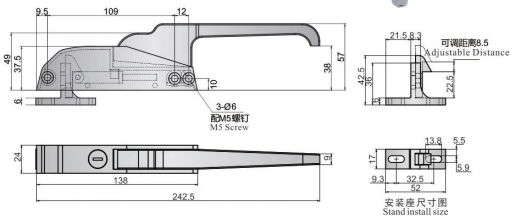



特点

- 撞击式关门结构，开关门省力轻便
- 座子高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . .敬请垂询

Features

- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer, Oven; etc.

Date of delivery

- Common product inquiry is welcome


订货号 Item No.	2D	RoHS	钥匙 Key	重量(g) Weight:(g)
SK1-1250	2D	●	有钥匙 YES	519
SK1-1250B	2D	●	无钥匙 NO	519

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch — SK1-1400


[SK1-1400]

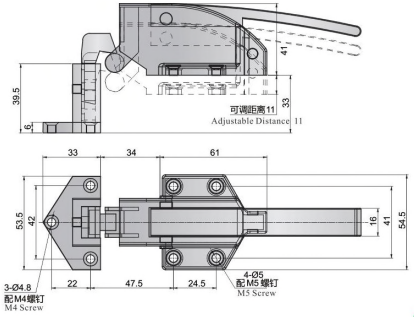

特点

- 撞击式关门结构，开关门省力轻便
- 座子高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . .敬请垂询

Features

- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer, Oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
SK1-1400	2D	●	379

● : RoHS对应产品　▲ : RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


冷库把手 Handle Latch

SK1-60010



[SK1-60010]



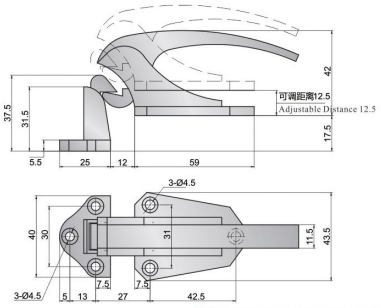

特点

- 安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer; Oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		RoHS	重量(g) Weight:(g)
SK1-60010	2D	●	160

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


冷库把手 Handle Latch

SK1-78013



[SK1-78013]



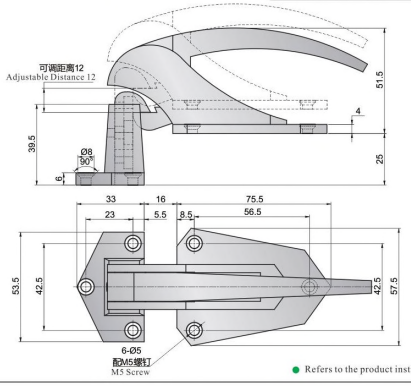

特点

- 安装座高度可调，适合不同的安装高度
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Base height can be adjusted, suitable for different installation heights
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer; Oven; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		RoHS	重量(g) Weight:(g)
SK1-78013	2D	●	357

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-6189



[SK1-6189]

特点

- 密闭及迫紧性能强
- 撞击式关门结构，开关门省力轻便
- 安装座高度可调，适合不同的安装高度
- 带锁芯锁定，安装孔带胶塞，更美观
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 实验箱、烤箱烘箱、蒸饭柜等
交货期 ● 常规产品. . . 敬请垂询

Features

- Strong sealing and tightness
- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Locked with cylinder, mounting hole with dust-proof, more beautiful
- Suitable for left and right side opening

Specification


- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application


- Testing box; Oven; Steaming cabinet;etc.

Date of delivery


- Common product inquiry is welcome

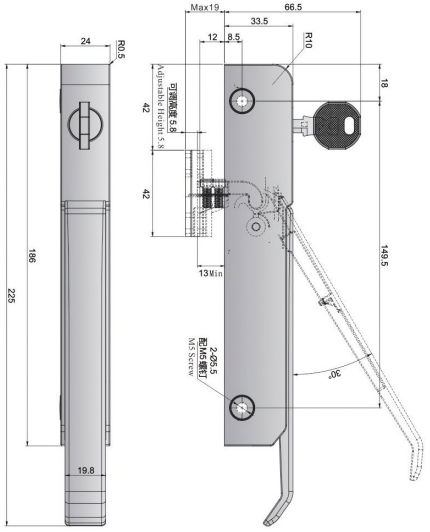





1-6189-9H-DD
安装高座尺寸图
Height base installation size



1-6189-9A-DD
安装矮座尺寸图
Flat base installation size

订货号 Item No.	RoHS		重量(g) Weight:(g)
SK1-6189	●	2D	593
1-6189-9H-DD	●	2D	12
1-6189-9A-DD	●	2D	10

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-6190


[SK1-6190B]

[SK1-6190A]

特点

- 密闭及迫紧性能强
- 撞击式关门结构，开关门省力轻便
- 安装座高度可调，适合不同的安装高度
- 带锁芯锁定，安装孔带胶塞，更美观
- 左右开门兼用

规　格 ● 产品材质：锌合金(ZDC)
● 表面处理：外壳烤漆银色、手柄烤漆黑色
其他锌合金开模件镀锌

用　途 ● 工业烤箱、生物医疗箱、高温烤箱、低温冷藏医疗设备、环境试验设备

交货期 ● 常规产品，敬请垂询

Features


- Strong sealing and tightness
- Impact type closing structure, easy to open and close
- Base height can be adjusted, suitable for different installation heights
- Locked with cylinder, mounting hole with dust-proof, more beautiful
- Suitable for left and right side opening


Specification


- Material: Zinc Alloy (ZDC)
- Finish: Shell: Silver Painted
  Handle: Black Pained
  Others: Zinc Plated


Application

- Industrial oven; Cold storage freezer; Medical equipment; etc.
- Common products inquiry is welcome

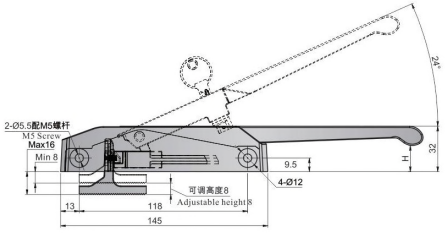







订货号 Item No.	RoHS	CAD	L	H	重量(g) Weight:(g)
SK1-6190A	●	2D	200	15.5	497
SK1-6190B	●	2D	254	18	537

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

冷库把手 Handle Latch

SK1-BS2


[SK1-BS2-L]

特点

- 符合人体工学设计，握感舒适
- 锁舌长度可微调
- 锁具自带90度限位

规　格 ● 材　　质：不锈钢(SUS304)+PC
● 表面处理：烤漆黑色

用　途 ● 干燥箱、烤箱、真空箱、老化箱、恒温箱等设备

交货期 ● 常规产品…敬请垂询

Features

- Conforming to human engineering, comfort grip
- The length of the pawl can be adjusted
- With limit fo 90°degrees

Specification


- Material: Stainless Steel (SUS 304) + PC
- Finish: Black Painted


Application


- Heating and Drying Ovens; Constant temperature and Humidity aging box; etc.


Date of delivery


- Common product inquiry is welcome

































订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)	锁舌长度(mm) Bolt length	安装方向 Installation direction
SK1-BS2-L	●	2D	235	60	左装 Left
SK1-BS2-1D-L	●	2D	224	50	左装 Left
SK1-BS2-R	●	2D	235	60	右装 Right
SK1-BS2-1D-R	●	2D	224	50	右装 Right

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 追紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

冷库把手 Handle Latch

NEW CAD RoHS **SK1-682**



[SK1-682L]

特点
- 迫紧式结构设计，密闭性能好
- 不锈钢材质，耐腐蚀性能好
- 手柄包胶，可用于高温箱体


规　格 ● 材　　质：不锈钢(SUS304)+尼龙(PA)
　　● 表面处理：黑色
用　途 ● 厨房设备，蒸汽箱，烤箱，冷冻库等
交货期 ● 常规产品…敬请垂询


Features
- Compression force structure design,strong sealing performance
- Stainless Steel material, great corrosion resistance performance
- Handle wrapped with rubber, suitable for high temperature cabinets


Specification
- Material: Stainless Steel (SUS304), Nylon(PA)
- Finish: Black

Application
- Kitchen equipment; Steam Box; Oven; Freezer;etc.


Date of delivery
- Common product inquiry is welcome








开孔尺寸 Opening Size





[SK1-682L]




[A-682-1]











开孔尺寸 Opening Size



[SK1-682R]

安装图 Installation Drawing



订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-682L	●	2D	766
SK1-682R	●	2D	766

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 追紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

密闭把手 Compression Handle

RoHS CAD **SK1-8118**



[SK1-8118-1L]　[SK1-8118-2L]　[SK1-8118-3L]

特点
- 具有强力迫紧锁闭功能
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
操　作 ● 将把手顺时针或逆时针旋转即可关闭门，关闭时座子上的斜度设计可将门强力密闭
用　途 ● 船舶、厨房设备、医疗设备、环境设备等
交货期 ● 常规产品. . .敬请垂询

Features
- With strong compression locking function
- Stainless Steel material, great corrosion resistance performance


Specification
- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing


Operating
- Clockwise or anticlockwise both can open or close the door, the door can be strongly closed with the bevel design


Application
- Marine, kitchen equipment; Medical equipment; Environmental equipment


Date of delivery
- Common product inquiry is welcome

















[SK1-8118-1L]




[SK1-8118-2L]



[SK1-8118-3L]



[SK1-8118-3TL]



[SK1-8118-2TL座子]

订货号 Item No.	包	重量(g) Weight:(g)
SK1-8118-1L	2D	615
SK1-8118-1R	2D	615
SK1-8118-2L	2D	377
SK1-8118-2R	2D	377
SK1-8118-3L	2D	193
SK1-8118-3R	2D	193
SK1-8118-2TL	2D	415
SK1-8118-2TR	2D	415
SK1-8118-3TL	2D	183
SK1-8118-3TR	2D	183

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭联动把手 Compression Handle

密闭把手 Compression Handle

SK1-1011S



[SK1-1011SL]



[SK1-1011SR]

特点

- 迫紧式结构设计，密闭性能好
- 手柄包胶，可用于高温箱体

规　格 ● 材　　质：不锈钢(SUS201)
　　● 表面处理：拉丝抛光
用　途 ● 厨房设备、蒸气箱、烤箱等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 分左右型号, 选择时请注意区分

Features

- Compression force structure design,strong sealing performance
- Handle wrapped with rubber, suitable for high temperature cabinets

Specification

- Material: Stainless Steel (SUS201)
- Finish: Wire-drawing Polishing

Application


- Kitchen equipment; Steam box; Oven; etc.

Date of delivery


- Common product inquiry is welcome

Remark

- Pay attention to distinguish left and right types, please remark when purchasing

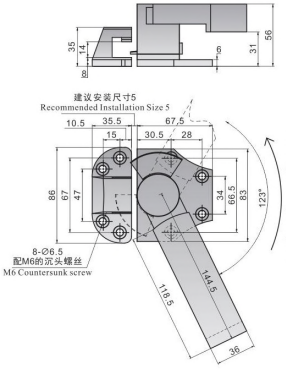

[SK1-1011SL]

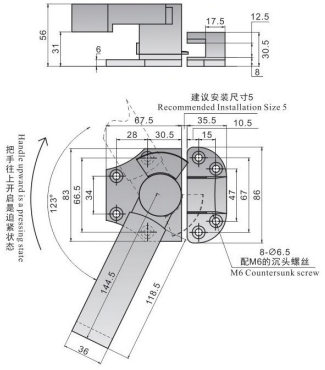

[SK1-1011SR]

安装图
Installation Drawing



订货号 Item No.	CAD	RoHS	安装方向 Fixed with welding	重量(g) Weight(g)
SK1-1011SL	2D	●	左装 Left	562
SK1-1011SR	2D	●	右装 Right	565

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧把手 Compression Handle

SK1-8110



[SK1-8110]



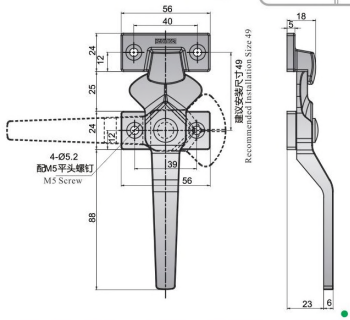

特点

- 迫紧斜面设计，门可被强力密闭
- 把手顺时针逆时针转动均可开关门
- 左右开门兼用

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 密闭门、隔音门、振动设备等
交货期 ● 常规产品. . . 敬请垂询

Features

- Compression oblique door design, door can be sealed strongly
- The door can be opened and closed by turning the handle clockwise or counterclockwise
- Suitable for left and right side opening

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Air-tight door; Soundproof door; Vibration equipment

Date of delivery

- Common product inquiry is welcome

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-8110	2D	●	190

●:RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧把手 Compression Handle

SK1-8114



[SK1-8114-1L]





[SK1-8114-1R]

特点

- 斜面迫紧设计, 可将门强力迫紧
- 有多种大小规格可选
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 自动化设备、半导体设备、锂电设备等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 分左右型号, 选择时请注意区分

Features

- Compression oblique door design, door can be sealed strongly
- Multiple specifications can be chosen, suitable for most doors
- Stainless Steel material, great corrosion resistance performance

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Automation equipment; Semiconductor equipment; Lithium battery equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Pay attention to distinguish left and right types, please remark when purchasing

订货号 Item No.	CAD	L1	L2	L3	L4	L5	L6	W1	W2	P1	P2	P3	H1	H2	H3	重量(g) Weight(g)	M
SK1-8114-1L	2D	95	45	14	28	41.5	22	90	52	34	70.5	40	37	48.5	18	439	M4沉头
SK1-8114-1R	2D	95	45	14	28	41.5	22	90	52	34	70.5	40	37	48.5	18	439	
SK1-8114-2L	2D	79.5	40	12	24	35	16	79	50.5	25	52	35	33	42	19.5	240	M5沉头
SK1-8114-2R	2D	79.5	40	12	24	35	16	79	50.5	25	52	35	33	42	19.5	240	
SK1-8114-3L	2D	68.5	32	11.5	23	30	13.5	65	50	22	43	35.5	25	35	18	200	M4沉头 Drill Countersunk hole
SK1-8114-3R	2D	68.5	32	11.5	23	30	13.5	65	50	22	43	35.5	25	35	18	200	
SK1-8114-4L	2D	63	30	10	20	28	13	60	45	20	40	32	29	36	16.5	145	
SK1-8114-4R	2D	63	30	10	20	28	13	60	45	20	40	32	29	36	16.5	145	

●:RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS



迫紧把手 Compression Handle

SK1-8114-5





特点

- 斜面迫紧设计，可将门强力迫紧
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 自动化设备、半导体设备、锂电设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 分左右型号，选择时请注意区分

Features

- Compression oblique door design, door can be sealed strongly
- Stainless Steel material, great corrosion resistance performance

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application


- Automation equipment; Semiconductor equipment; Lithium battery equipment; etc.

Date of delivery


- Common product inquiry is welcome

Remark

- Pay attention to distinguish left and right types, please remark when purchasing

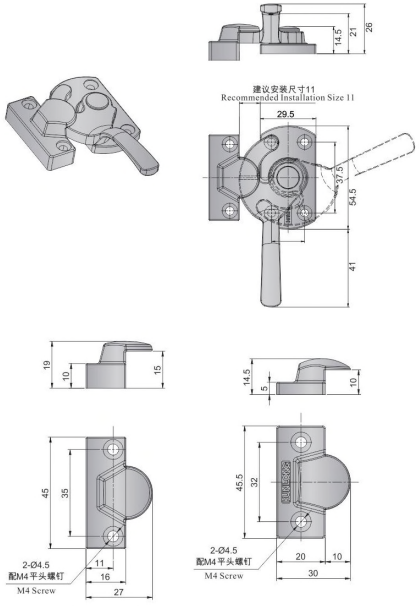

[1-8114-5-CT]　　[1-8114-5C]



选配座子 Optional base		重量(g) Weight:(g)
1-8114-5C	2D	//
1-8114-5-CT	2D	//

订货号 Item No.		重量(g) Weight:(g)	M
SK1-8114-5L	2D	110	M4沉头 M4 Countersunk hole
SK1-8114-5R	2D	110	

● : RoHS对应产品　▲ : RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧把手 Compression Handle

SK1-8114-6



特点

- 斜面迫紧设计，可将门强力迫紧
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 自动化设备、半导体设备、锂电设备等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 分左右型号，选择时请注意区分

Features

- Compression oblique door design, door can be sealed strongly
- Stainless Steel material, great corrosion resistance performance

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application


- Automation equipment; Semiconductor equipment; Lithium battery equipment; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Pay attention to distinguish left and right types, please remark when purchasing

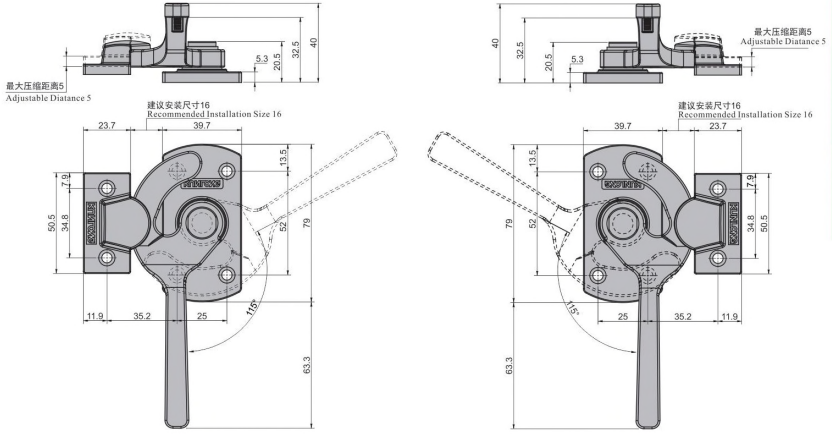

[SK1-8114-6L]　　[SK1-8114-6R]

订货号 Item No.		安装方向 Fixed with welding	重量(g) Weight:(g)
SK1-8114-6L	2D	左装 Left	235
SK1-8114-6R	2D	右装 Right	


● : RoHS对应产品　▲ : RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

迫紧把手 Compression Handle — SK1-8119


[SK1-8119L]


[SK1-8119R]

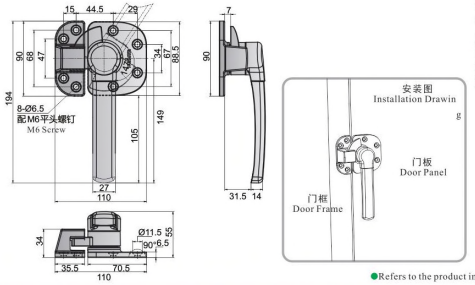

特点

- 具有强力迫紧锁闭功能
- 不锈钢材质，耐腐蚀性能好
- 手柄包胶，握感舒适

规　格 ● 材　　质：不锈钢(SUS 304)
　　● 表面处理：镜面抛光
用　途 ● 厨具设备、烤箱、蒸汽箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- With strong compression locking function
- Stainless Steel material, great corrosion resistance performance
- Covered with rubber, comfort grip

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Kitchen equipment; Oven; Steam box; etc

Date of delivery


- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight(g)
SK1-8119L	2D	883
SK1-8119R	2D	883


●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧把手 Compression Handle — SK1-8119-3

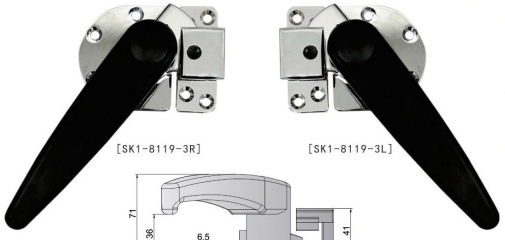
[SK1-8119-3R]

[SK1-8119-3L]





特点

- 座子斜面式设计，迫紧功能强
- 手柄为塑胶材质,有效隔绝高温

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 冷冻设备、冷藏柜、烤箱、蒸气箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Oblique base design with strong compression force function
- Plastic handle, high temperature isolated

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Bright Chrome Plated

Application

- Freezing equipment; Freezer; Oven; Steam box;etc.

Date of delivery

- Common product inquiry is welcome



订货号 Item No.			重量(g) Weight(g)
SK1-8119-3L	2D	●	600
SK1-8119-3R	2D	●	600

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧把手 Compression Handle — SK1-8119-4


[SK1-8119-4L]


[SK1-8119-4R]

特点

- 不锈钢材质，耐腐蚀性能好
- 有高座与矮座可选配，高座区分有孔螺钉固定与无孔焊接固定
- 高座高度可调节
- 可实现快速拆装的功能，方便快捷
- 手柄最大开启角度90°

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 冷库，机柜，测试箱体等
交货期 ● 常规产品…敬请垂询
备　注 ● 提供手柄专款定制

Features

- Stainless Steel material, great corrosion resistance performance
- With high or flat base can be chosen.The fixed way of high base which have screw or welding can be chosen
- The height of high base can be adjusted
- Assembling fast,easy to install
- Low profile with 90 degree opening angle

Specification

- Material:Stainless Steel(SUS304)
- Finish: Bright Polishing

Application


- Cold storage; Cabinet;Test chamber;etc.

Date of delivery


- Common product inquiry is welcome

Remark


- Welcome to customize




[SK1-8119-4L]

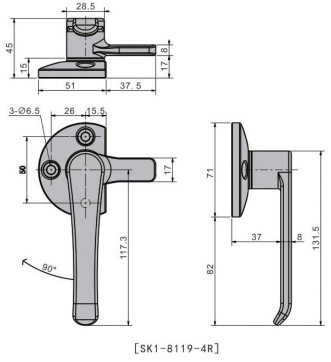

[SK1-8119-4R]



[A-8119-4-1]

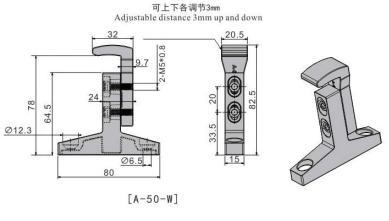

[A-50-W]

订货号 Item No.			安装方向 Fixed with welding	重量(g) Weight(g)
SK1-8119-4L	●	2D	左装 Left	441
SK1-8119-4R	●	2D	右装 Right	441

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

选配座子 Optional base		座子 Base	重量(g) Weight(g)
A-8119-4-1	2D	矮座 Flat base	132
A-50-W	2D	高座 High base	238

迫紧门把手 Handle Latch

SK1-8119-6



[SK1-8119-6R] [SK1-8119-6L]

特点

- 具有强力迫紧锁闭功能
- 手柄包胶，握感舒适
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS201)
　　● 表面处理：拉丝抛光
用　途 ● 厨具设备、烤箱、蒸汽箱等
交货期 ● 常规产品…敬请垂询

Features

- With strong compression locking function
- Covered with rubber, comfort grip
- Stainless Steel material, great corrosion resistance performance

Specification


- Material:Stainless Steel (SUS201)
- Finish: Wire-drawing Polishing

Application


- Kitchen equipment; Steam box; Oven; etc.

Date of delivery

- Common product inquiry is welcome

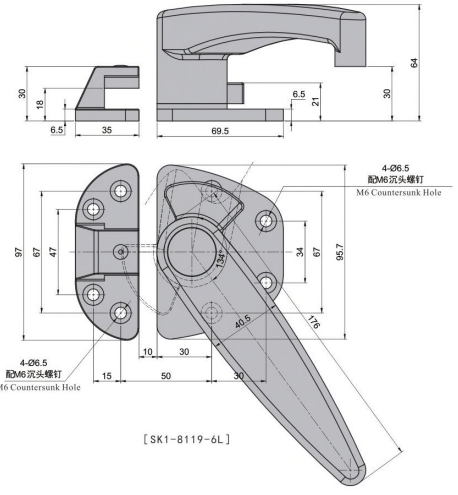

[SK1-8119-6L]



订货号 Item No.	RoHS		重量(g) Weight:(g)
SK1-8119-6L	●	2D	427
SK1-8119-6R	●	2D	427

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

● :RoHS对应产品 ▲ :RoHS可对应产品

迫紧门把手 Handle Latch

SK1-8119-7



[SK1-8119-7R] [SK1-8119-7L]

特点

- 具有强力迫紧锁闭功能
- 手柄包胶，握感舒适
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 厨具设备、烤箱、蒸汽箱等
交货期 ● 常规产品…敬请垂询

Features

- With strong compression locking function
- Covered with rubber, comfort grip
- Stainless Steel material, great corrosion resistance performance

Specification


- Material:Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing

Application


- Kitchen equipment; Steam box; Oven; etc.

Date of delivery

- Common product inquiry is welcome

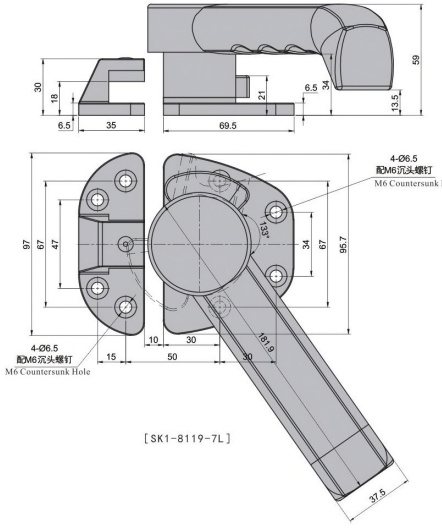

[SK1-8119-7L]



订货号 Item No.	RoHS		重量(g) Weight:(g)
SK1-8119-7L	●	2D	497
SK1-8119-7R	●	2D	497

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

● :RoHS对应产品 ▲ :RoHS可对应产品

迫紧门把手 Handle Latch

NEW RoHS

SK1-8119-8



[SK1-8119-8R] [SK1-8119-8L]

特点

- 具有强力迫紧锁闭功能
- 手柄包胶，握感舒适
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 厨具设备、烤箱、蒸汽箱等
交货期 ● 常规产品…敬请垂询

Features

- With strong compression locking function
- Covered with rubber, comfort grip
- Stainless Steel material, great corrosion resistance performance

Specification


- Material:Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing


Application


- Kitchen equipment; Steam box; Oven; etc.

Date of delivery

- Common product inquiry is welcome





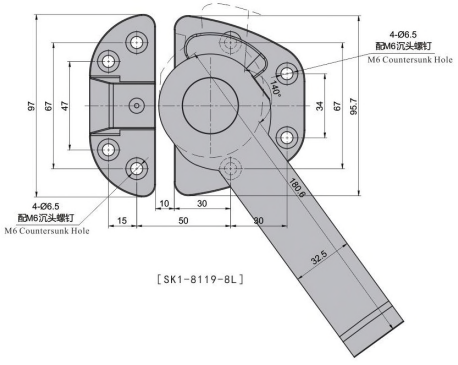

[SK1-8119-8L]

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-8119-8L	●	2D	561
SK1-8119-8R	●	2D	561

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

迫紧门把手 Handle Latch

NEW RoHS

SK1-8119-9



[SK1-8119-9R] [SK1-8119-9L]

特点

- 具有强力迫紧锁闭功能
- 手柄包胶，握感舒适
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：拉丝抛光
用　途 ● 厨具设备、烤箱、蒸汽箱等
交货期 ● 常规产品…敬请垂询

Features

- With strong compression locking function
- Covered with rubber, comfort grip
- Stainless Steel material, great corrosion resistance performance

Specification


- Material:Stainless Steel (SUS304)
- Finish: Wire-drawing Polishing


Application


- Kitchen equipment; Steam box; Oven; etc.

Date of delivery

- Common product inquiry is welcome





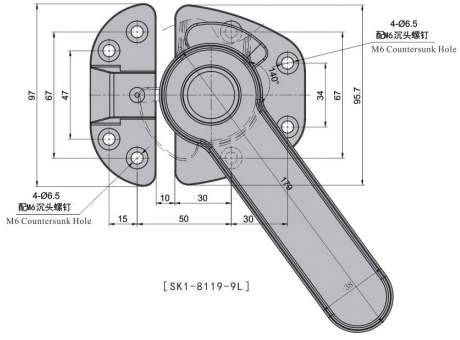

[SK1-8119-9L]

订货号 Item No.	RoHS	2D	重量(g) Weight:(g)
SK1-8119-9L	●	2D	471
SK1-8119-9R	●	2D	471

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧把手 Compression Handle

SK1-501-T




[SK1-501L-T] [SK1-501R-T]

Patent No.: ZL 2017 2 0536482. 1

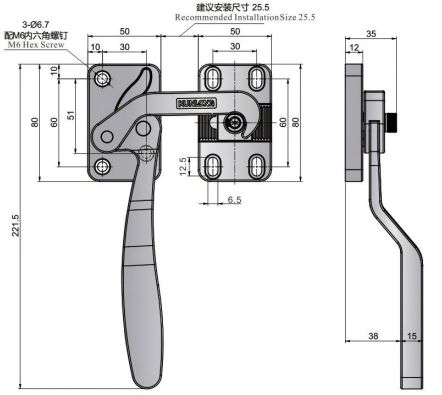

[SK1-501R-T]



特点

- 自主专利设计，整体性能较好
- 具有压缩迫紧功能，压缩行程可微调
- 手柄包胶工艺，握感更舒适

规 格 ● 材 质：不锈钢(SUS304)
● 表面处理：镜面抛光
用 途 ● 恒温恒湿箱、环境试验箱、检测设备
操 作 ● 将把手顺时针用力打开后继续拨动把手至钩子从座子上滑出即可开门
交货期 ● 常规产品，敬请垂询
备 注 ● 另有小型SK1-601，大型SK1-602可选

Features

- Patented Design, good overall performance
- With compression and pressing function, compression stroke can be fine-tuned
- Covered with rubber, comfort grip

Specification

- Material: Stainless Steel(SUS304)
- Finish: Bright Polishing

Application

- Temperature humidity chamber; Environmental test equipment; Testing equipment;

Operation

- After the handle clockwise to force open the continuing slide handle hooks that slide open the door from the nest

Date of delivery

- Common product inquiry is welcome

Remark

- With Small size SK1-601 and Big size SK1-602X



订货号 Item No.	RoHS	包装	重量(g) Weight(g)
SK1-501L-T	●	2D	880
SK1-501R-T	●	2D	880

●:RoHS对应产品 ▲:RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS


迫紧把手 Compression Handle


SK1-601



[SK1-601]

Patent No.: ZL 2012 2 0086773.2

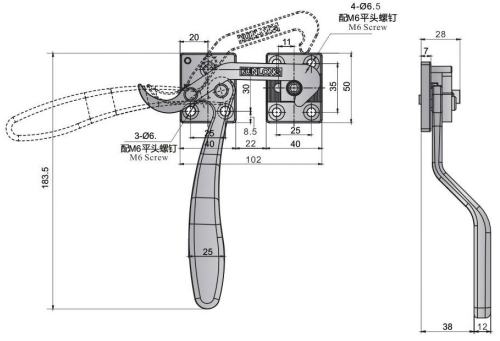



特点

- 侧门安装，杠杆原理使门的开启和关闭更轻松
- 座子可调节以调整密封条迫紧程度
- 不锈钢材质，耐腐蚀性能好
- 具有压缩迫紧功能，压缩行程可微调
- 手柄包胶工艺，握感更舒适

规 格 ● 材 质：不锈钢(SUS304)
● 表面处理：镜面抛光
用 途 ● 烤箱、恒温恒湿箱、环境试验箱等
操 作 ● 将把手顺时针用力打开后继续拨动把手至钩子从座子上滑出即可开门
交货期 ● 常规产品，敬请垂询
备 注 ● 此把手只适用于“右装”，另有加大版本型号SK1-602

Features

- Side door installation, easy to open and close by lever principle
- Adjust the base to adjust sealing strip's compression degree
- Stainless Steel material, great corrosion resistance performance
- With compression and pressing function, compression stroke can be fine-tuned
- Covered with rubber, comfort grip

Specification

- Material: Stainless Steel(SUS304)
- Finish: Bright Polishing

Application

- Oven, Temperature humidity chamber, Environmental test equipment

Operation

- After the handle clockwise to force open the continuing slide handle hooks that slide open the door from the nest


Date of delivery

- Common product inquiry is welcome

Remark

- Only suitable for "Right side installation"
- With Big size SK1-602X





订货号 Item No.	RoHS	包装	重量(g) Weight(g)
SK1-601	●	2D	310

●:RoHS对应产品 ▲:RoHS可对应产品


● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle


侧门装迫紧把手 Compression Handle SK1-602X



[SK1-602X]

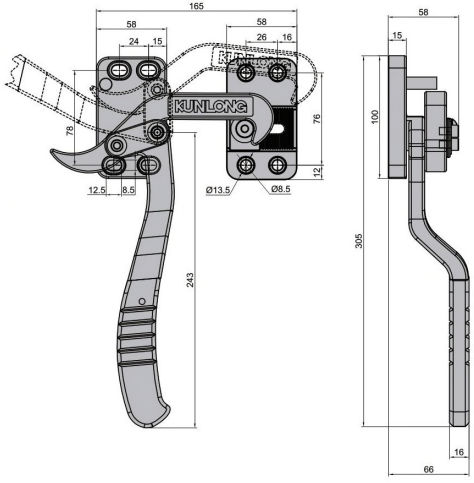





特点

- 侧门安装，杠杆原理使门的开启和关闭更轻松
- 不锈钢材质，耐腐蚀性能好
- 具有压缩迫紧功能，压缩行程可微调
- 手柄包胶工艺，握感更舒适

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 烤箱、恒温恒湿箱、环境试验箱、大型门
操　作 ● 双手将把手顺时针用力打开后继续拨动把手至钩子从座子上滑出即可开门
交货期 ● 常规产品. . .敬请垂询
备　注 ● 此把手只适用于“右装”

Features

- Side door installation, easy to open and close by lever principle
- Stainless Steel material, great corrosion resistance performance
- With compression and pressing function, compression stroke can be fine-tuned
- Covered with rubber, comfort grip

Specification

- Material: Stainless Steel(SUS304)
- Finish: Bright Polishing

Application

- Oven, Temperature humidity chamber, Environmental test equipment, Big door

Operation

- After the handle clockwise to force open the continuing slide handle hooks that slide open the door from the nest

Date of delivery

- Common product inquiry is welcome

Remark

- Only suitable for "Right side installation"

订货号 Item No.	RoHS	CAD	重量(g) Weight(g)
SK1-602X	●	2D	1879

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle


密闭把手 Compression Handle SK1-606



[SK1-606L]
Patent No.: ZL 201830195889.2



[SK1-606R]

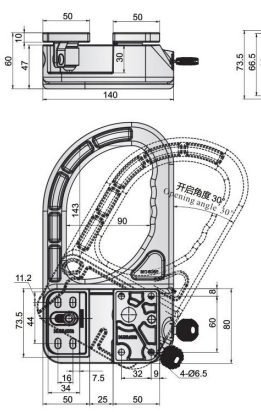

[SK1-606R]

特点

- 新型外观专利设计
- 带迫紧功能，密封压缩行程约15mm
- 安装固定座横向、纵向可调，调节行程约7mm

规　格 ● 材　　质：铝合金
　　● 表面处理：烤漆银色
用　途 ● 生物医疗箱、环境试验箱等
交货期 ● 常规产品. . .敬请垂询

Features

- New appearance patent design
- With strong compression force function, the Max compression distance is about 15 mm
- The fixed base can be adjusted horizontally and longitudinally, the adjustment distance of about 7 mm

Specification


- Material: Aluminum Alloy
- Finish: Silver Painted

Application

- Biological medical Equipmennt; Testing Equipment; etc.

Date of delivery

- Common product inquiry is welcome







订货号 Item No.	CAD	重量(g) Weight(g)
SK1-606R	2D	1779
SK1-606L	2D	1779

● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle


小型密闭把手 Compression Handle

SK1-607












[SK1-607R]









特点

- 新型外观专利设计
- 带迫紧功能，密封压缩行程约15mm
- 安装固定座横向、纵向可调，调节行程约7mm

规　格 ● 材　　质：铝合金
　　● 表面处理：烤漆银色
用　途 ● 生物医疗箱、环境试验箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- New appearance patent design
- With strong compression force function, the Max compression distance is about 15 mm
- The fixed base can be adjusted horizontally and longitudinally, the adjustment distance of about 7 mm

Specification

- Material: Aluminum Alloy
- Finish: Silver Painted

Application

- Biological medical Equipmennt; Testing Equipment; etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight:(g)
SK1-607R	2D	1505
SK1-607L	2D	1505

● : RoHS对应产品　▲ : RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle


智能电控锁
Electronic Compression Handle Latch


SK1-S0001



[SK1-S0001]





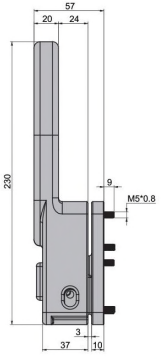

特点

- 新型外观专利设计
- 带迫紧功能，密封压缩行程约15mm
- 安装固定座横向、纵向可调，调节行程约7mm

规　格 ● 材　　质：铝合金
　　● 表面处理：烤漆银色
用　途 ● 生物医疗箱、环境试验箱等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 此锁只适用于“右装”

Features

- New appearance patent design
- With strong compression force function, the Max compression distance is about 15 mm
- The fixed base can be adjusted horizontally and longitudinally, the adjustment distance of about 7 mm

Specification

- Material: Aluminum Alloy
- Finish: Silver Painted

Application

- Biological medical Equipmennt; Testing Equipment; etc.


Date of delivery

- Common product inquiry is welcome

Remark

- Only suitable for "Right side installation"

相关参数 Parameters		工作环境 Working environment	
额定电压 Rated voltage	DC12V	温度 Temperature	-40~+65℃
额定电流 Rated current	≤0.25A	湿度 Humidity	5~90%
消耗功率 Power consumption	≤3W	海拔 Altitude	-60m~4000m



开门状态 Open State　　闭门状态 Closed state

三种开锁方式
Three ways to open the smart lock

1. PLC控制器开锁（锁具预留接线，用户需自行连接至设备端控制器）
2. IC卡刷卡开锁
3. 机械钥匙备用开锁

1.PLC control device (With reserved cables, and users need to connect to the device controller by themselves)
2. IC card
3. Spare mechanical key

可定制功能
Customizable function

指纹解锁 Finger Scan

蓝牙解锁(手机APP) Bluetooth ToolKit (APP)

创新功能
Innovative features

1. 锁具的触动机构可以实现开关锁状态的监管，以及开锁和闭锁的时间点记录。
2. 锁具配备备用电池，当设备断电时，可续航72小时以上。

1.The touch actuator can realize the supervision of unlocking or locking state, and record the time of opening and locking
2.Equipped with spare battery, which sustainable use over 72 hours when the equipment power off.

温馨提示：
锁具由开门进入关门状态5秒后，即可实现电控锁闭

Warm prompt :
After 5 seconds from opening to locking state, electrically controlled locking can be realized.

订货号 Item No.		重量(g) Weight:(g)
SK1-S0001	2D	2800

● : RoHS对应产品　▲ : RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


RZ门扣 Catch

SK1-RZ600



[SK1-RZ600]

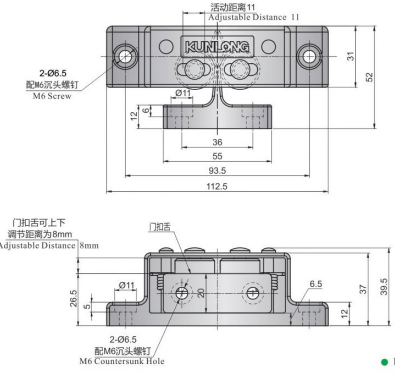





特点

- 具有强力迫紧功能
- 用于凸门安装

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 烤箱、试验设备、工业箱体
交货期 ● 常规产品. . . 敬请垂询
备　注 ●若箱体内压力过大门可自行弹开

Features

- ●Strong compression force function
- ●Suitable for cam door

Specification

- ●Material: Zinc Alloy(ZDC)
- ●Finish: Black Painted

Application

- ●Oven; Testing equipment; Industrial cabinet

Date of delivery

- ●Common product inquiry is welcome

Remark

- ●The door automatic bounce when high pressure inner box

订货号 Item No.			重量(g) Weight(g)
SK1-RZ600	2D	●	428

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


钩锁 Draw Latch

SK1-R5-007



[SK1-R5-007]





特点

- ● 可强力拼装部件, 拆卸方便
- ● 左右开门兼用

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：镀锌
用　途 ● LED显示屏、电子设备、大型屏幕拼接
交货期 ● 常规产品. . . 敬请垂询

Features

- ●Parts can be assembled strongly, easy to removal
- ●Suitable for left and right side opening

Specification

- ●Material: Cold Rolled Sheet(SPCC)
- ●Finish: Zinc Plated

Application

- ●LED display; Electronic equipment; Large-screen display

Date of delivery

- ●Common product inquiry is welcome

订货号 Item No.			重量(g) Weight(g)
SK1-R5-007	2D	●	320

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


强力门扣 Compression Catch

SK1-400-2



[SK1-400-2]



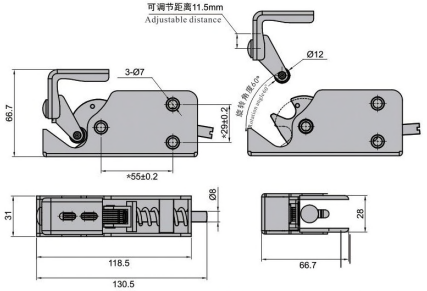

特点

- ● 具有强力扣紧功能
- ● 座子高度可调节
- ● 左右开门兼用

规　格 ● 材　　质：冷轧板(SPCC)
　　● 表面处理：烤漆黑色
用　途 ● 烤箱、试验箱、恒温恒湿箱等
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 若箱体内压力过大可自行弹开

Features

- ●With strong fastening function
- ●Base height can be adjusted
- ●Suitable for left and right side opening

Specification

- ●Material: Cold Rolled Sheet(SPCC)
- ●Finish: Black Painted

Application

- ●Oven, Test Chamber, Temperature humidity chamber etc

Date of delivery

- ●Common product inquiry is welcome

Remark

- ●Automatic bounce when high pressure inner box, blasting protection

订货号 Item No.			重量(g) Weight(g)
SK1-400-2	2D	●	568

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


迫紧把手 Compression Latch

SK1-505S-R



[SK1-505S-R]





特点

- ● 侧门安装，安装方便
- ● 密闭及迫紧性能强
- ● 不锈钢材质，耐腐蚀性能好

规　格 ● 产品材质：不锈钢(SUS304)
　　表面处理：镜面抛光
用　途 ● 工业烤箱、生物医疗箱、高温烤箱、
　　冷藏医疗设备、环境试验设备等
交货期 ● 常规产品，敬请垂询

Features

- ●Side door installation, easy to install.
- ●Strong sealing and tightness force
- ●Stainless Steel material, great corrosion resistance performance

Specification

- ●Material: Stainless Steel (SUS304)
- ●Finish: Bright Polishing

Application

- ●Industrial oven; Cold storage freezer; Medical equipment; etc.

Date of delivery

- ●Common products inquiry is welcome

订货号 Item No.			重量(g) Weight(g)
SK1-505S-R	●	2D	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

侧门装迫紧把手 Compression Latch

SK1-107



[SK1-107MB]

特点
- 不锈钢材质，耐腐蚀性能好
- 具有强力迫紧功能
- 带锁芯，可锁定不被弹开


规　格 ● 材　　质:不锈钢(SUS304)、尼龙(PA)外壳
　　● 表面处理：黑色包胶
用　途 ● 烤箱、试验箱、恒温恒湿箱等
交货期 ● 常规产品. . . 敬请垂询


Features
- Stainless Steel material, great corrosion resistance performance
- With strong flex and compression force
- With cylinder, latching and without bouncing


Specification
- Material: Stainless Steel(SUS304),Nylon(PA) Shell
- Finish: Polished with handle,Black Rubber Coating

Application
- Oven,Temperature humidity chamber, Environmental test equipment

Date of delivery
- Common product inquiry is welcome



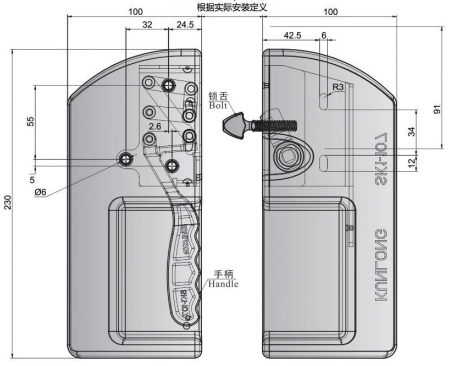




钥匙 Key

订货号 Item No.		颜色 Color	重量(g) Weight:(g)
SK1-107MB	2D	黑色 Black	970

● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS



安装：手柄部分使用3个M6长螺钉固定于门板上，锁舌部分安装于门框上，安装时可微调上下位置，故建议先安装手柄部分再安装锁舌部分，最后将外壳安装。

操作：关闭时推动门板，安装于门框上的锁舌可自动滑入手柄的迫紧部分进而锁定门锁。也可在失去门板的同时转动手柄将迫紧部分打开至一定角度，锁舌进入到合适的位置后再松开手柄，从而锁定，这样可降低关门噪音。

Installation: Using three M6 screws to fix on door panel for the handle, bolt parts fix on the door frame. Fine-tuning the up and down position when installing. Please installing from handle to bolt and then outside shell.
Operation: Pushing the door panel when closing, the bolt in the door frame can slip into the compression part of handle to latching.Rotating the handle to open the compression part to definite angel while without door panel, loosen the handle after the bolt enter to the adaptable position, then latching. It will be reduced the noise well.



门把手 Compression Latch


SK1-600




[SK1-600]
Patent No.: ZL 2010 2 0196291. 3



[SK1-600L]
Patent No.: ZL 2010 2 0196291. 3





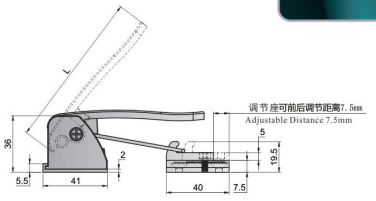

特点
- 调节座可调整压缩行程
- 常规和加长型两种型号可选
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 烤箱、恒温恒湿箱、环境试验箱
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 安装时请先安装底板

Features
- Adjustable base can adjust the compression stroke
- Common or over-length types can be chosen
- Suitable for left and right side opening

Specification
- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application
- Oven, Temperature humidity chamber, Environmental test equipment

Date of delivery
- Common product inquiry is welcome

Remark
- Please install the base firstly

订货号 Item No.		L	重量(g) Weight:(g)
SK1-600	2D	100	330
SK1-600L	2D	130	370

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


小型密闭把手 Compression Latch


SK1-600S



[SK1-600S]
Patent No.: ZL 2010 2 0196291. 3





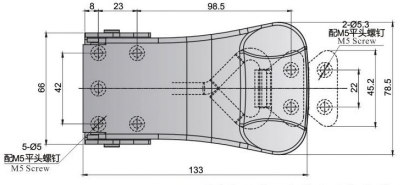

特点
- 钩环可调整压缩行程
- 不锈钢材质，耐腐蚀性能好
- 手柄浸胶工艺

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：振动研磨
用　途 ● 烤箱、恒温恒湿箱、环境试验箱、密封箱体
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 安装时请先安装底板

Features
- Adjustable hook can adjust the compression stroke
- Stainless Steel material, great corrosion resistance performance
- Covered with rubber

Specification
- Material: Stainless Steel(SUS304), Handle Rubber
- Finish: Vibration Grinding

Application
- Oven, Temperature humidity chamber, Environmental test equipment, Sealed box

Date of delivery
- Common product inquiry is welcome

Remark
- Please install the base firstly

订货号 Item No.		重量(g) Weight:(g)
SK1-600S	2D	436

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS PAD VDM

SK1-9002



[SK1-9002-1]

特点

- 通过30万次开关测试
- 二级开门，放掉蒸汽及热风的安全设计
- 操作简单，生产技术先进

规　格 ● 材　　质：主体/锌合金或不锈钢(SUS304)
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/镀砂铬或镜面抛光
　　手柄包胶/黑色
　　安装座/振动研磨
用　途 ● 万能蒸烤箱，热风循环炉，工业烤箱设备等
交货期 ● 常规产品…敬请垂询

Features

- The testing of opening and closing function for 300,000 times
- Twice opening design, Safe design for discharge of steam and hot air
- Simple operation, advanced technology

Specification


- Material: Body: Zinc Alloy or Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Sand Chrome Plated or Bright Polishing
  Covered with rubber: Black
  Base: Vibration Grinding

Application

- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.

Date of delivery

- Common product inquiry is welcome

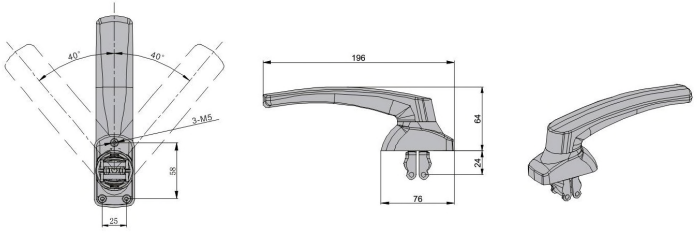

开孔尺寸
Opening Size

订货号 Item No.	RoHS	PAD	材质 Material	重量(g) Weight:(g)
SK1-9002-1	●	2D	锌合金(Zinc Alloy)	462
SK1-9002-2	●	2D	不锈钢(Stainless Steel)	482

●：RoHS对应产品　▲：RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS PAD VDM

SK1-9003



[SK1-9003-1]

特点

- 通过30万次开关测试
- 二级开门，放掉蒸汽及热风的安全设计
- 操作简单，生产技术先进

规　格 ● 材　　质：主体/锌合金(ZDC)
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/镀亮铬
　　手柄包胶/黑色/灰色
　　安装座/振动研磨
用　途 ● 万能蒸烤箱，热风循环炉，工业烤箱设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 提供灰色，黑色选择

Features

- The testing of opening and closing function for 300,000 times
- Twice opening design, Safe design for discharge of steam and hot air
- Simple operation, advanced technology

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black or Grey
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- With Black and Gray can be chosen.

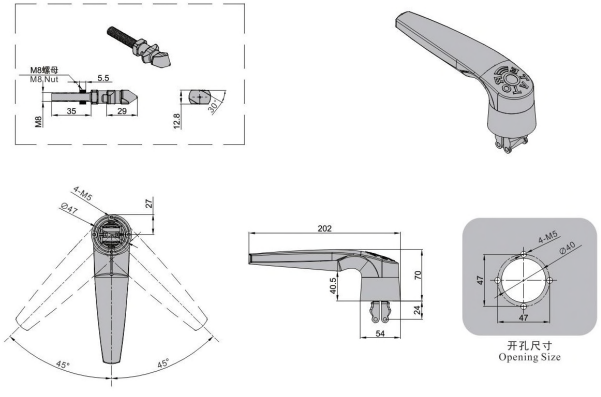

开孔尺寸
Opening Size

订货号 Item No.	RoHS	PAD	颜色 Color	重量(g) Weight:(g)
SK1-9003-1	●	2D	黑色(Black)	538
SK1-9003-2	●	2D	灰色(Grey)	538

●：RoHS对应产品　▲：RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

SK1-9005



[SK1-9005-1]

特点

- 通过30万次开关测试
- 二级开门，放掉蒸汽及热风的安全设计
- 操作简单，生产技术先进

规　格 ● 材　　质：主体/锌合金或不锈钢(SUS304)
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/镀砂铬或镜面抛光
　　手柄包胶/黑色
　　安装座/振动研磨
用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 提供锌合金（磨砂），不锈钢（镜面）选择

Features

- The testing of opening and closing function for 300,000 times
- Twice opening design, Safe design for discharge of steam and hot air
- Simple operation, advanced technology

Specification

- Material: Body: Zinc Alloy or Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Sand Chrome Plated or Bright Polishing
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome


Remark


- With Zinc Alloy (Abrasive sand) and Stainless steel (Bright polishing) can be chosen.











开孔尺寸
Opening Size

订货号 Item No.	NEW	RoHS	材质 Material	重量(g) Weight(g)
SK1-9005-1	●	2D	锌合金(Zinc Alloy)	427
SK1-9005-2	●	2D	不锈钢(Stainless steel)	447

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

SK1-9006



[SK1-9006]

特点

- 出色的环境卫生友好性
- 整体采用圆弧柔美设计
- 操作简单，工艺制作技术先进

规　格 ● 材　　质：主体/锌合金
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/镀亮铬
　　手柄包胶/黑色
　　安装座/振动研磨
用　途 ● 万能蒸烤箱.热风循环炉.工业烤箱设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 支持手柄定制

Features

- Suitable for high requirements of sanitary environment
- Soft arc design
- Simple operation, Advanced manufacturing technology

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome


Remark


- Welcome to customize











开孔尺寸
Opening Size

订货号 Item No.	2D	RoHS	重量(g) Weight(g)
SK1-9006	2D	●	447

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9007



[SK1-9007-L]

特点

- 可有效密闭门体
- 整体采用圆弧柔美设计
- 操作简单，工艺制作技术先进

规　格 ● 材　　质：主体/锌合金(ZDC)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/镀亮铬
手柄包胶/黑色
安装座/振动研磨

用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等

交货期 ● 常规产品…敬请垂询

备　注 ● 支持手柄定制

Features

- Effectively airtight door
- Soft arc design
- Simple operation, Advanced manufacturing technology

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome


Remark


- Welcome to customize

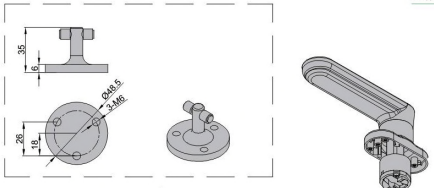









开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	重量(g) Weight(g)
SK1-9007-L	●	2D	左装 Left	427
SK1-9007-R	●	2D	右装 Right	447

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9008



[SK1-9008-L]

特点

- 提供左开，右开型号
- 轻推一下门即处于关闭状态
- 操作简单，工艺制作技术先进

规　格 ● 材　　质：主体/不锈钢(SUS304)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/不锈钢本色
手柄包胶/黑色
安装座/振动研磨

用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等

交货期 ● 常规产品…敬请垂询

备　注 ● CAD图纸和图片都为右开

Features

- With left and right type can be chosen
- Closed with a slight push
- Simple operation, Advanced manufacturing technology

Specification

- Material: Body: Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Natural
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome

Remark


- Welcome to customize









开孔尺寸
Opening Size



[SK1-9008-L]







开孔尺寸
Opening Size



[SK1-9008-R]

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	重量(g) Weight(g)
SK1-9008-L	●	2D	左装 Left	336
SK1-9008-R	●	2D	右装 Right	336

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9009



[SK1-9009-1L]

特点

- 提供左开，右开型号
- 轻推一下门即处于关闭状态
- 操作简单，工艺制作技术先进

规　格 ● 材　　质：主体/不锈钢(SUS304)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/不锈钢本色
手柄包胶/黑色或灰色
安装座/振动研磨

用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等

交货期 ● 常规产品…敬请垂询

备　注 ● 支持手柄定制

Features

- With left and right type can be chosen
- Closed with a slight push
- Simple operation, Advanced manufacturing technology

Specification

- Material: Body: Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Natural
  Covered with rubber: Black or Grey
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome

Remark

- Welcome to customize



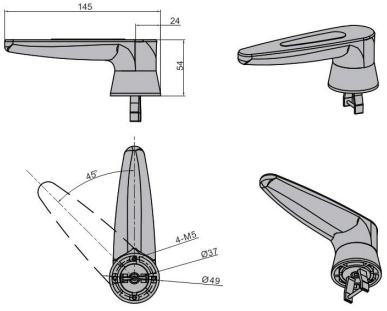



开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	颜色 Color	重量(g) Weight:(g)
SK1-9009-1L	●	2D	左装 Left	黑红(Black red)	365
SK1-9009-1R	●	2D	右装 Right		
SK1-9009-2L	●	2D	左装 Left	灰红(Grey red)	
SK1-9009-2R	●	2D	右装 Right		

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9011



[SK1-9011-1]

特点

- 通过30万次开关测试
- 提供单级开门/双级开门型号
- 外观高端大气，握感饱满舒适

规　格 ● 材　　质：主体/锌合金(ZDC)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/镀亮铬
手柄包胶/黑色
安装座/振动研磨

用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等

交货期 ● 常规产品…敬请垂询

备　注 ● 支持手柄定制

Features

- The testing of opening and closing function for 300,000 times
- With single-stage opening and twice-stage opening can be chosen
- Elegant appearance and comfort grab feel

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery


- Common product inquiry is welcome

Remark

- Welcome to customize

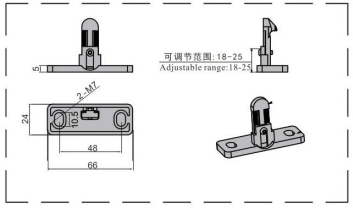





开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	结构功能 Structure	重量(g) Weight:(g)
SK1-9011-1	●	2D	单级开门(Single opening)	618
SK1-9011-2	●	2D	双级开门(Twice opening)	621

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

SK1-9012



[SK1-9012]

特点

- 轻推一下门即处于关闭状态
- 结构灵活，调节能力强
- 操作简单，生产技术先进

规　格 ● 材　　质：主体/不锈钢(SUS304)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/不锈钢本色
手柄包胶/黑色
安装座/拉丝抛光

用　途 ● 万能蒸烤箱，迷你万能蒸烤箱，多门蒸柜设备等

交货期 ● 常规产品…敬请垂询

备　注 ● 提供手柄专款定制

Features

- Closed with a slight push
- Flexible structure and strong adjustment ability
- Simple operation, Advanced production technology

Specification

- Material: Body: Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Natural
  Covered with rubber: Black
  Base: Wire-drawing Polishing

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery

- Common product inquiry is welcome

Remark

- Welcome to customize

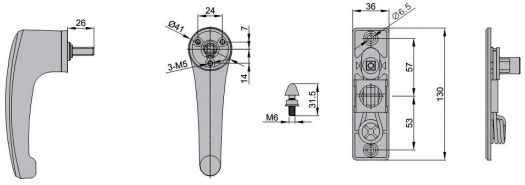



开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-9012	●	2D	444

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

SK1-9013



[SK1-9013]

特点

- 通过30万次开关测试
- 操作顺畅，使用寿命长
- 十年沉淀积累经验，结构独特新立

规　格 ● 材　　质：主体/锌合金(ZDC)
手柄包胶/尼龙(PA)
安装座/不锈钢(SUS304)
● 表面处理：主体/镀亮铬
手柄包胶/黑色
安装座/振动研磨

用　途 ● 万能蒸烤箱，热风循环炉，工业烤箱设备等

交货期 ● 常规产品…敬请垂询

备　注 ● 提供手柄样式开发定制

Features

- The testing of opening and closing function for 300,000 times
- Smooth operation and long working cycle
- Novel and beautiful design, reasonable internal process unique structure

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black
  Base: Vibration Grinding

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery

- Common product inquiry is welcome


Remark


- Welcome to customize














开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-9013	●	2D	413

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9015



[SK1-9015-L]

特点

- 精致美观，结构新颖独特
- 轻推一下门即处于关闭状态

规　格 ● 材　　质：主体/锌合金(ZDC)
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/镀亮铬
　　手柄包胶/黑色
　　安装座/不锈钢本色
用　途 ● 万能蒸烤箱，智能多门蒸柜，小型烤箱设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 需根据门体厚度定制

Features

- Novel and beautiful design, reasonable internal process unique structure
- Closed with a slight push

Specification

- Material: Body: Zinc Alloy(ZDC)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Bright Chrome Plated
  Covered with rubber: Black
  Base: Natural

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Customized according to door thickness

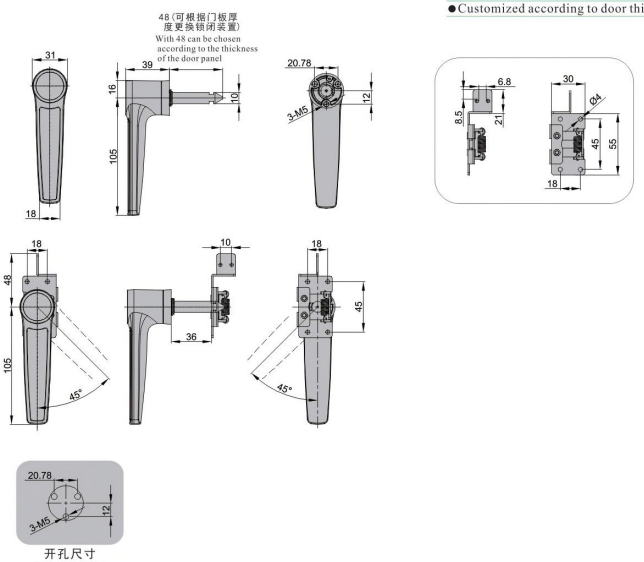

开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	重量(g) Weight:(g)
SK1-9015-L	●	2D	左装 Left	158
SK1-9015-R	●	2D	右装 Right	

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

蒸烤箱把手 Handle Latch

NEW RoHS CAD

SK1-9016



[SK1-9016-L]

特点

- 外观设计优雅永不过时
- 操作简单，坚固耐用

规　格 ● 材　　质：主体/不锈钢(SUS304)
　　手柄包胶/尼龙(PA)
　　安装座/不锈钢(SUS304)
　　● 表面处理：主体/不锈钢本色
　　手柄包胶/黑色
　　安装座/不锈钢本色
用　途 ● 万能蒸烤箱，热风循环炉，工业烤箱设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 提供手柄专款定制

Features

- Novel and beautiful design
- Simple operation,sturdy and durable

Specification

- Material: Body: Stainless Steel(SUS304)
  Covered with rubber: Nylon(PA)
  Base: Stainless Steel(SUS304)
- Finish: Body: Natural
  Covered with rubber: Black
  Base: Natural

Application


- Combi-Steamer; Recirculation furnace; Industrial oven ; etc.


Date of delivery

- Common product inquiry is welcome

Remark

- Welcome to customize

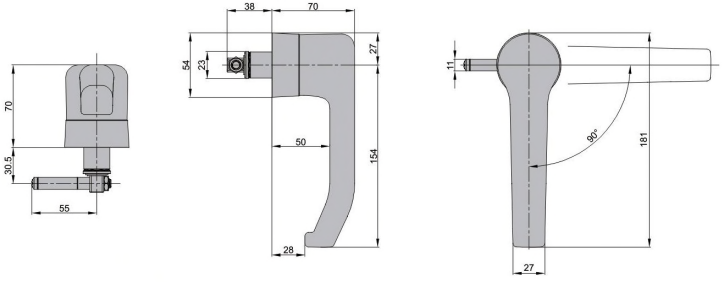



开孔尺寸
Opening Size

订货号 Item No.	RoHS	CAD	安装方向 Fixed with welding	重量(g) Weight:(g)
SK1-9016-L	●	2D	左装 Left	595
SK1-9016-R	●	2D	右装 Right	595


● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


大型迫紧把手 Compression Handle

SK1-701-X












[SK1-701R-X]


产品安装尺寸
Installation size












[SK1-701L-X]

产品安装尺寸
Installation size





订货号 Item No.			L1	L2	重量(g) Weight:(g)
SK1-701L-X	2D	●	10	40.5	1505
SK1-701R-X	2D	●	10	40.5	1505
SK1-701LC	2D	●	20	50.5	1743
SK1-701RC	2D	●	20	50.5	1746

●:RoHS对应产品 ▲:RoHS可对应产品

特点

- 有压缩迫紧功能，最大压缩行程约15-18mm
- 全新外观专利设计
- 分左右型号，选择时请注意区分

规　格 ● 材　　质：外壳，手柄/锌合金(ZDC)，锁钩/不锈钢(SUS304)
● 表面处理：外壳/烤漆银色，手柄/烤漆黑色，锁钩/振动研磨
用　途 ● 深低温储藏箱、医疗冷藏箱、试验箱
交货期 ● 常规产品，敬请垂询
备　注 ● 可定制不同工艺、颜色表面处理

Features

- With strong flex and compression force, the Max compression distance is about 15-18mm
- New appearance of the patented design
- Pay attention to distinguish left and right types, please remark when purchasing

Specification

- Material: Shell & Handle / Zinc Alloy(ZDC)
  Locking Catch / Stainless Steel(SUS304)
- Finish: Shell /Silver Painted, Handle / Black Painted
  Locking Catch / Vibration Grinding

Application

- Environmental Test Equipment, Cryogenic storage compartment, Medical Equipment, etc.

Date of delivery

- Common product inquiry is welcome

Remark

- With left and right type, please refer to the installation drawing and item number to choose

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

迫紧把手 Compression Handle Latch

SK1-704R



[SK1-704R]

特点

- 带锁芯，旋转钥匙实现锁闭
- 把手安装孔位横向与纵向可微调
- 把手关闭后具有定位功能、不会因负压，振动等因素弹开
- 有压缩迫紧功能、最大压缩行程约15-20mm

规　格 ● 材　　质：外壳，手柄/锌合金(ZDC)，锁钩/不锈钢(SUS304)
● 表面处理：外壳，手柄/烤漆灰色，锁钩/振动研磨
用　途 ● 深低温储藏箱，医疗冷藏箱，测试箱体等
交货期 ● 常规产品…敬请垂询

Features

- With lock cylinder, locking by turning the key
- Mounting holes can be fine-tuned horizontally and vertically
- With positioning function after closing, and will not bounce due to negative pressure, vibration and other factors
- With strong flex and compression force ,the Max compression distance is about 15-20mm

Specification


- Material: Shell & Handle / Zinc Alloy(ZDC)
  Locking Catch / Stainless Steel(SUS 304)
- Finish: Shell & Handle / Gray Painted
  Locking Catch / Vibration Grinding


Application


- Deep low temperature storage; Medical refrigerator; Test chamber;etc


Date of delivery


- Common product inquiry is welcome














开孔尺寸
Opening Size

订货号 Item No.			重量(g) Weight:(g)
SK1-704R	●	2D	2020

●:RoHS对应产品 ▲:RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

密闭联动把手 Handle Latch

NEW CAD RoHS **SK1-093-6ST**



[SK1-093-6ST]

特点

- 内置弹簧结构，方便开启和关闭
- 左右开门兼用
- 两点锁闭，安装座螺杆可调

规　格 ● 材　　质：不锈钢(SUS201)
　　● 表面处理：电解抛光
用　途 ● 烤箱、试验箱、测试箱体
交货期 ● 常规产品…敬请垂询
备　注 ● 自配不锈钢把手连杆，外径Φ25mm，壁厚1.0mm，建议长度不大于400mm

Features

- Innerspring structure, easy to open and close
- Suitable for left and right side opening
- Two-poing locking,base screw can be adjusted

Specification

- Material:Stainless Steel (SUS201)
- Finish: Electro Polishing

Application


- Oven; Test Chamber; Test Equipment; etc


Date of delivery

- Common product inquiry is welcome

Remark

- Outer diameter Φ25mm and thickness 1.0mm stainless steel tube needs to buy additionally, recommended the length is not more than 400mm

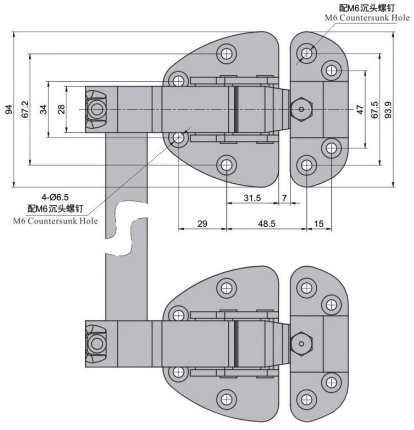

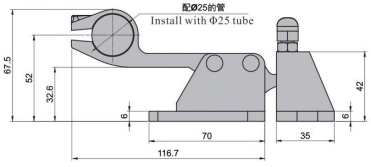

订货号 Item No.	RoHS	CAD	重量(g) Weight:(g)
SK1-093-6ST	●	2D	1089

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

密闭联动把手 Handle Latch

CAD RoHS **SK1-093-3T**


1-093-3-5DD


1-093-3S-5PG


1-093-3S-5C-PG


1-093-3-9DD


1-093-3-9SPG


1-093-3S-5B-PG

特点

- 杠杆原理使门开启和关闭更轻松
- 不锈钢材质，耐腐蚀性能好
- 通过连接管，可单手操作大型门两处锁具的开关
- 左右开门兼用

规　格 ● 材　　质：锌合金(ZDC)．不锈钢(SUS304)
　　● 表面处理：镀亮铬/拉丝抛光
用　途 ● 烤箱、试验箱、测试箱体
交货期 ● 常规产品．．．敬请垂询
备　注 ● 自配不锈钢把手连杆，外径Φ20mm，壁厚1.0mm，建议长度不大于400mm

Features

- The lever principle makes opening and closing the door easier
- Stainless Steel material, great corrosion resistance performance
- Through connecting pipe, the switch of two locks for large doors can be operated by one hand
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC),Stainless Steel(SUS304)
- Finish: Bright Chrome Plated, Wire-drawing Polishing

Application

- Oven, Test chamber

Date of delivery


- Common product inquiry is welcome

Remark

- Outer diameter Φ20mm and thickness 1.0mm stainless steel tube needs to buy additionally, recommended the length is not more than 400mm


钥匙 Key

[SK1-093-3T]


[SK1-093-3ST]


钥匙 Key

[SK1-093-3STK]

选配座子 Optional base	RoHS	CAD	座子 Base	材质 Material	表面处理 Finish	重量(g) Weight:(g)
1-093-3-5DD	●	2D	单开座	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	148
1-093-3-9DD	●	2D	对开座	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	//
1-093-3S-5PG	●	2D	单开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	171
1-093-3S-5C-PG	●	2D	单开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	136
1-093-3S-5B-PG	●	2D	对开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	180
1-093-3-9SPG	●	2D	对开座	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	//

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

订货号 Item No.	RoHS	CAD	材质 Material	表面处理 Finish	重量(g) Weight:(g)
SK1-093-3T	●	2D	锌合金 Zinc Alloy	镀亮铬 Bright Chrome Plated	1430
SK1-093-3ST	●	2D	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	1309
SK1-093-3STK	●	2D	不锈钢 Stainless steel	拉丝抛光 Wire-drawing Polishing	1309


● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

密闭联动把手 Handle Latch


SK1-093-3T

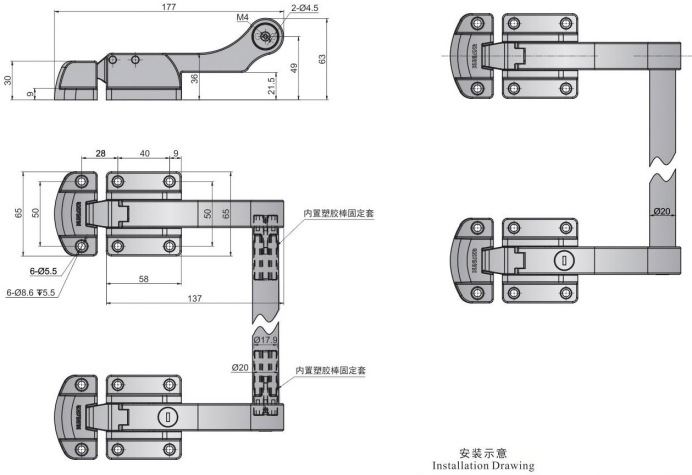

[SK1-093-3T]

安装示意
Installation Drawing



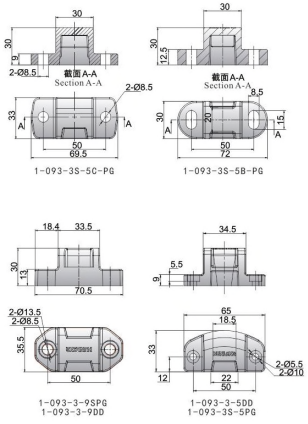


钩锁 Hook Lock

SK1-106





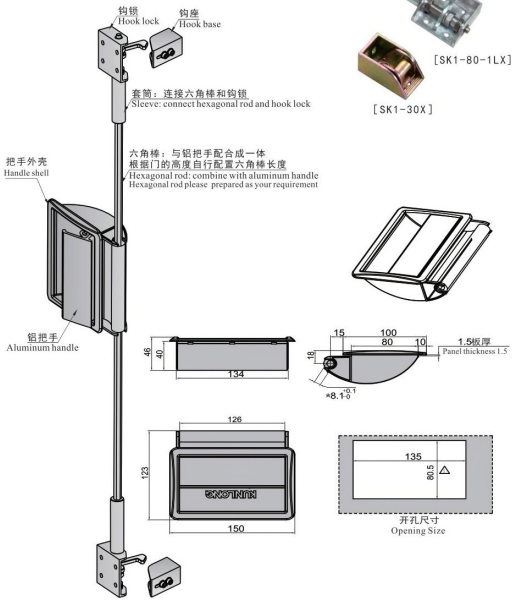

订货号 Item No.	RoHS	包装	重量(g) Weight:(g)
SK1-106	●	2D	227
SK1-80-1LX	●	2D	166
SK1-80-1RX	●	2D	166
SK1-30X	●	2D	84

●：RoHS对应产品 ▲：RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

特点

- 关闭时推动门可自行碰撞锁住
- 开启时拉动把手即可开启

规 格 ● 材 质：座子锌合金（ZDC）、钩锁锌合金（ZDC）把手框尼龙（PA）、把手铝合金
● 表面处理：座子镀锌、钩锁镀锌 把手框黑色、把手阳极银色
用 途 ● 恒温恒湿箱、烤箱、试验箱
交货期 ● 常规产品，敬请垂询
备 注 ● 需自配六角连杆
搭配用量：1-80L-1（1个）、1-80R-1（1个）、SK1-30（2个）
把手部分可以选配SK1-200、SK1-300、SK1-700
各配件安装方式请参见安装图

Features

- The door can be collided and locked automatically after pushing
- Pull the handle to open

Specification

- Material: Pedestal :Zinc Alloy(ZDC)
  Hook Lock: Zinc Alloy (ZDC)
  Handle Frame: Nylon(PA)
  Handle: Aluminum Alloy
- Finish: Pedestal: Zinc Plated
  Hook Lock: Zinc Plated
  Handle Frame: Black
  Handle: Silver Anodizing

Application

- Temperature humidity chamber,Oven,Test chamber


Date of delivery

- Common product inquiry is welcome

Remark

- Needing to prepare hexagonal rod as your requirement
- Using with 1-80L(1pc),1-80R(1pc) and SK1-30(2pcs)
- The handle can choose SK1-200\SK1-300\SK1-700
- The parts install please kindly refer to installation drawing

安装示意
Installation Drawing

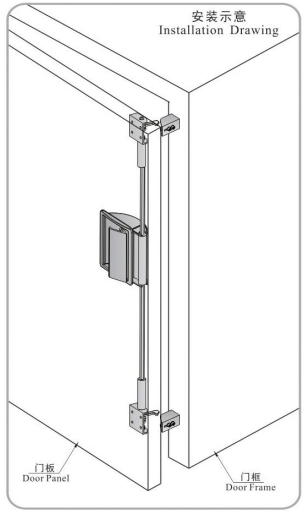



按钮式把手 Handle Latch

SK1-232



[SK1-232L]





特点

- 撞击关门, 按压式开门, 开关简易
- 调节座迫紧部分高度可以调节，适用板厚1-2mm

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀珍珠铬
用　途 ● 医疗冷藏箱、锂电池烘箱、试验箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Impact closed,push open
- Base height can be adjusted ,Suitable door plank thickness:1-2mm

Specification

- Material: Zinc Alloy(ZDC)
- Finish:Pearl Chrome Plated

Application

- Medical deep-freezer;Lithium battery oven; Test chamber; etc.

Date of delivery

- Common product inquiry is welcome



订货号 Item No.		重量(g) Weight(g)
SK1-232L	2D	1042
SK1-232R	2D	1042


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS　● :RoHS对应产品　▲ :RoHS可对应产品


调节座 Adjustable base

SK1-100-4



[SK1-100-4]





特点

- 安装在门框上，迫紧部分的高度可调节
- 安装在门侧边无箱体的门框上，即凸门安装
- 与SK1-200, SK1-200K, SK1-300或SK1-700配合使用

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：不锈钢本色
用　途 ● 烤箱、试验箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Installed in the door frame, force part's height can be adjusted
- Installed in the side door frame without cabinet, tumbler door installation
- Using with SK1-200,SK1-200K,SK1-300 or SK1-700

Specification

- Material: Stainless Steel(SUS304)
- Finish: Natural

Application

- Oven;Test chamber;etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight(g)
SK1-100-4	2D	123


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS　● :RoHS对应产品　▲ :RoHS可对应产品


平门式安装座 Flat door installation base

SK1-100-3



[SK1-100-3]



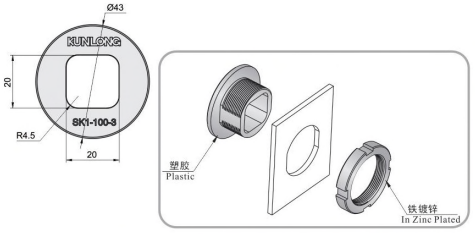



特点

- 门内安装，迫紧部分不暴露在门外
- 安装在门侧边有箱体的门框上, 即平门安装
- 与SK1-200, SK1-200K, SK1-300或SK1-700配合使用

规　格 ● 材　　质：冷轧板、塑胶
　　● 表面处理：镀锌及塑胶黑色
用　途 ● 烤箱、试验箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Inner door installation, force part is hidden
- Installed in the side door with cabinet, flat door installation
- Using with SK1-200,SK1-200K,SK1-300 or SK1-700

Specification

- Material: Cold Rolled Sheet(SPCC),Plastic
- Finish: Zinc Plated,Black

Application

- Oven;Test chamber;etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight(g)
SK1-100-3	2D	39

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS　● :RoHS对应产品　▲ :RoHS可对应产品

压缩门扣 Compression Catch


SK1-100




[SK1-100]



[SK1-100-1]

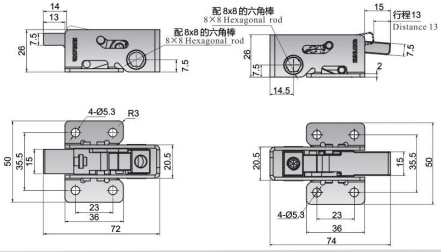

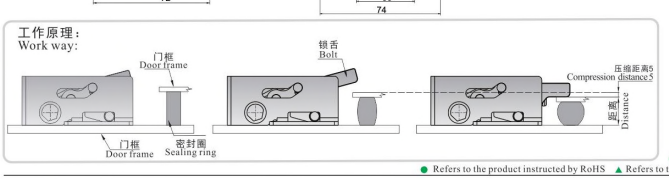

特点

- 靠六角棒带动以压缩锁紧门体
- 与SK1-200, SK1-200K, SK1-300或SK1-700配合使用
- 锁舌有可调节和不可调节两种规格
- 不可调节锁舌可频繁使用且承受力更强

规　格 ● 材　　质：不锈钢(SUS304)、冷轧板(SPCC)
　　● 表面处理：镀锌
用　途 ● 烤箱、试验箱等
交货期 ● 常规产品. . . 敬请垂询

Features

- Hexagonal rods driven to compress locking the door
- Using with SK1-200,SK1-200K,SK1-300 or SK1-700
- Spring bolt with adjustable and unadjustable specifications
- Unadjustable Spring bolt can use frequently and strong load bearing

Specification

- Material:Stainless Steel(SUS304), Cold Rolled Sheet(SPCC)
- Finish: Zinc Plated

Application

- Oven;Test chamber;etc.

Date of delivery

- Common product inquiry is welcome

订货号 Item No.		重量(g) Weight(g)
SK1-100	2D	144
SK1-100-1	2D	132

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS　● :RoHS对应产品　▲ :RoHS可对应产品

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

压缩密闭把手 Compression Sealed Handle

解决方案 Solution



特点

- 把手有多款形式，详细请见各把手型号
- 压缩门扣具有压缩追紧功能
- 压缩门扣的安装高度和数量可自定
- 压缩门扣有两种规格可选
- 座子有平门式安装座和凸门式安装座，可选配


备注● 六角棒请根据实际所需长度自行配置

Features

- Various handle types please refer to the specific item No.
- Compression catch with compression force function
- Compression catch's installing height and quantity can be customized
- Two compression catch specification to be chosen
- Flat or tumbler door installation base can be chosen

Remark


- Hexagonal rod please prepared as your requirement

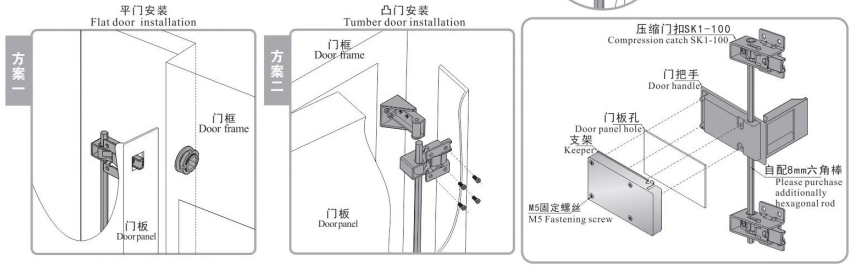

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

横式把手 Compression Latch

SK1-200

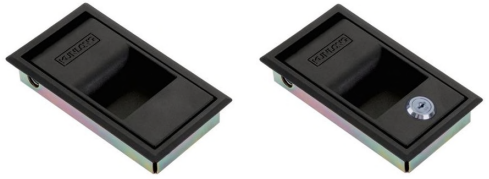

[SK1-200] Patent No.: ZL 2010 2 0196321. 0

[SK1-200K] Patent No.: ZL 2010 2 0196321. 0

特点

- 扭力大，开启及关闭轻松
- 带锁芯和不带锁芯两种型号
- 左右开门兼用
- 与SK1-100，SK1-100-1，SK1-100-3或SK1-100-4配合使用

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：烤漆黑色
用　途 ● 烤箱、试验箱等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 需自配 8mm 六角棒

Features

- High-torque,easy to open and close
- With cylinder and without cylinder can be chosen
- Suitable for left and right side opening
- Using with SK1-100,SK1-100-1,SK1-100-3 or SK1-100-4

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application


- Oven;Test chamber;etc.


Date of delivery


- Common product inquiry is welcome

Remark


- Matching the 8mm hexagonal rod as requirement

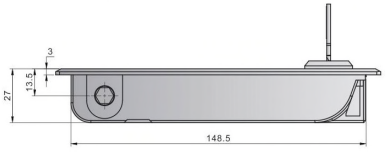

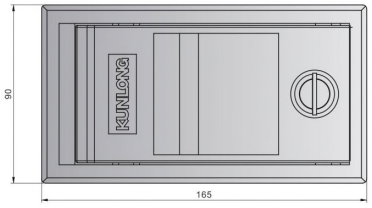



开孔尺寸
Opening Size

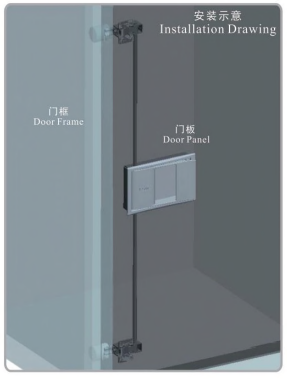




订货号 Item No.	RoHS	包	重量(g) Weight:(g)
SK1-200	●	2D	895
SK1-200K	●	2D	938

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

竖式把手 Compression Latch

SK1-300



[SK1-300]
Patent No.: ZL 2010 2 0196321. 0

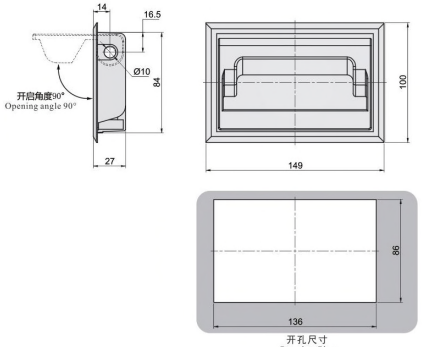

特点

- 具有压缩迫紧功能
- 左右开门兼用
- 与SK1-100, SK1-100-1, SK1-100-3或SK1-100-4配合使用

规 格 ● 材 质：锌合金(ZDC)
● 表面处理：烤漆黑色
用 途 ● 烤箱、试验箱等
交货期 ● 常规产品. . .敬请垂询
备 注 ● 需自配 8mm 六角棒
● 必须与其它配件配套使用


Features
●With strong flex and compression force
●Suitable for left and right side opening
●Using with SK1-100,SK1-100-1,SK1-100-3 or SK1-100-4
Specification
●Material: Zinc Alloy(ZDC)
●Finish: Black Painted
Application
●Oven;Test chamber;etc.
Date of delivery
●Common product inquiry is welcome
Remark
●Matching the 8mm hexagonal rod as requirement
●Must match other parts to use

订货号 Item No.			重量(g) Weight(g)
SK1-300	●	2D	789


●:RoHS对应产品 ▲:RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

小型密闭把手 Compression Latch

SK1-700



[SK1-700]
Patent No.: ZL 2010 2 0196321. 0

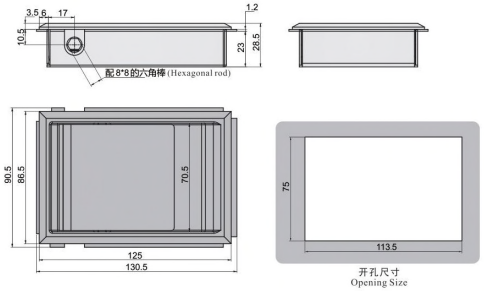

特点

- 轻便，更适合安装于小型箱体的门上
- 具有压缩迫紧功能
- 与SK1-100, SK1-100-1, SK1-100-3或SK1-100-4配合使用

规 格 ● 材 质：锌合金(ZDC)
● 表面处理：烤漆黑色
用 途 ● 烤箱、试验箱等
交货期 ● 常规产品. . .敬请垂询
备 注 ● 必须与其它配件配套使用
● 需自配 8mm 六角棒

Features
●Easier and suitable for mini cabinet door
●With strong flex and compression force
●Using with SK1-100,SK1-100-1,SK1-100-3 or SK1-100-4
Specification
●Material: Zinc Alloy(ZDC)
●Finish: Black Painted
Application
●Oven;Test chamber;etc.
Date of delivery
●Common product inquiry is welcome
Remark
●Must match other parts to use
●Matching the 8mm hexagonal rod as requirement

订货号 Item No.			重量(g) Weight(g)
SK1-700	2D	●	541

●:RoHS对应产品 ▲:RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

不锈钢连杆式天地锁 Multi-Point Lock


SK1-387



[SK1-387]





[1-387-3]
保持架标准配置2个
With 2pcs keepers provided

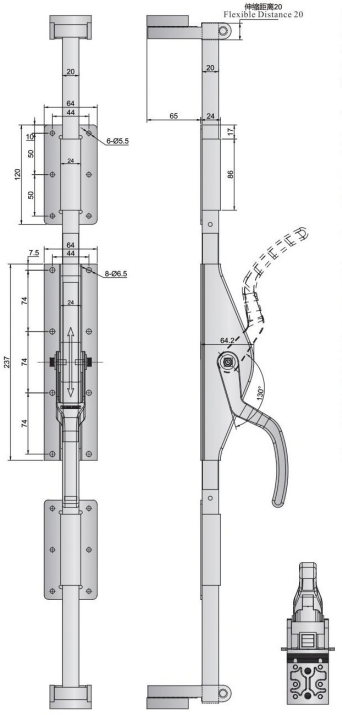



[A-100S]/[A-48V]
固定座2款选1款,
标准配置2个







特点

- 杠杆原理使门的开启和关闭更轻松
- 通过调节座子可实现密闭压缩门功能
- 外形美观，上推开门，下拉关门
- 适合的门板厚度范围大

规 格 ● 材 质：不锈钢(SUS304)
● 表面处理：镜面抛光
用 途 ● 大型有密闭要求的设备，如大型高底温试验箱，冷库等
交货期 ● 常规产品. . .敬请垂询
备 注 ● 保持架标配2个，可根据安装要求单独购买
● 需自配20MM方钢

Features
●Easy to open and close by leverage
●Achieving hermetic and compression door function by adjustable base
●Elegant appearance, push upward to open, pull downward to close
●Big thickness range of door panel
Specification
●Material: Stainless Steel(SUS304)
●Finish:Bright Polishing
Application
● Big hermetic equipment required, such as Big high and low temperature testing box, freezer
Date of delivery
●Common product inquiry is welcome
Remark
● With 2pcs keepers provided, more can be purchased separately according to the actual requirements
● 20mm steel tube need to buy additionally







订货号 Item No.		重量(g) Weight(g)
SK1-387	2D	1762
A-100S	2D	491
A-48V	2D	73

●:RoHS对应产品 ▲:RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS


防爆门扣 Compression Latch

SK1-500

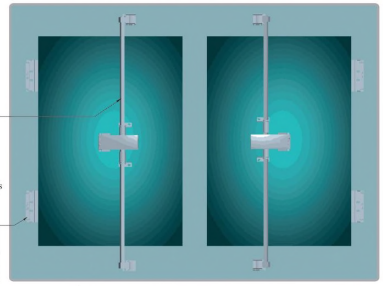

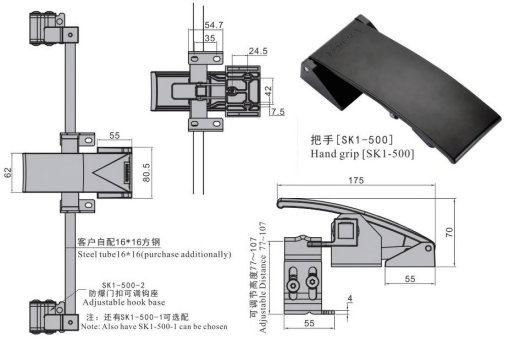


把手[SK1-500]
Hand grip [SK1-500]



[SK1-500-2]/[SK1-500-1]
2款选1款，标准配置2个
Choose one of two type/Standard configuration: 2PCS


调节座[SK1-500-2]
Adjustable base



固定座[SK1-500-1]
Fixed base




保持架：
标准配置为一套四个
安装时两两对称安装
Keeper:
Standard configuration 4pcs per set
Need to install by bilateral type






迫紧舌：
标准配置为一套两个
Forced tight tongue:
Standard configuration 2pcs per set





圆套筒：
标准配置为一套两个
Round bush:
Two standard configuration



特点
- 高温高压下可自动弹开
- 回压功能、密封性能强
- 单开门及双开门都可用

规　格 ● 材　　质：把手锌合金(ZDC)
座子铸铁
保持架冷轧板(SPCC)
迫紧舌铸铁
圆套筒铁
● 表面处理：把手烤漆黑色
座子烤漆黑色
保持架镀亮铬
迫紧舌镀亮铬
圆套筒镀亮铬
用　途 ● 烤箱、试验箱、环境试验设备等箱体
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 需自配16mm方钢

Features
- Automatically bounce under high temperature and pressure
- Back pressure and strong sealing performance
- Single or double opening are available

Specification
- Material: Handle: Zinc Alloy(ZDC)
  Pedestal: Iron Carbon Alloy
  Keeper: Cold Rolled Sheet(SPCC)
  Force Plate: Iron Carbon Alloy
  Round Bush: Iron
- Finish: Handle: Black Painted
  Pedestal: Black Painted
  Keeper: Bright Chrome Plated
  Force Plate: Bright Chrome Plated
  Round Bush: Bright Chrome Plated

Application
- Oven, Test chamber, Environmental test equipment and other cabinets

Date of delivery
- Common product inquiry is welcome

Remark
- Needing to prepare 16mm square steel as requirement


订货号 Item No.		重量(g) Weight:(g)
SK1-500	2D	1297
SK1-500-1	2D	704
SK1-500-2	2D	300

●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

防爆门扣 Compression Latch


NEW


SK1-500-B

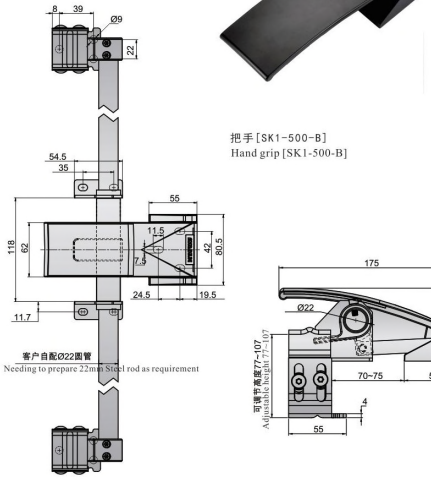




把手[SK1-500-B]
Hand grip [SK1-500-B]





[SK1-500-2]/[SK1-500-1]
2款选1款，标准配置2个
Choose one of two type/Standard configuration: 2PCS


调节座[SK1-500-2]
Adjustable base




固定座[SK1-500-1]
Fixed base




保持架：
标准配置为一套四个
安装时两两对称安装
Keeper:
Standard configuration 4pcs per set
Need to install by bilateral type






迫紧舌：
标准配置为一套两个
Forced tight tongue:
Standard configuration 2pcs per set





圆套筒：
标准配置为一套两个
Round bush:
Two standard configuration



特点
- 高温高压下可自动弹开
- 回压功能、密封性能强
- 单开门及双开门都可用

规　格 ● 材　　质：把手锌合金(ZDC)
座子铸铁
保持架冷轧板(SPCC)
迫紧舌铸铁
圆套筒铁
● 表面处理：把手烤漆黑色
座子烤漆黑色
保持架镀亮铬
迫紧舌镀亮铬
圆套筒镀亮铬
用　途 ● 烤箱、试验箱、环境试验设备等箱体
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 自配不锈钢圆管，外径Φ22mm壁厚1.2-2.0mm

Features
- Automatically bounce under high temperature and pressure
- Back pressure and strong sealing performance
- Single or double opening are available

Specification
- Material: Handle: Zinc Alloy(ZDC)
  Pedestal: Iron Carbon Alloy
  Keeper: Cold Rolled Sheet(SPCC)
  Force Plate: Iron Carbon Alloy
  Round Bush: Iron
- Finish: Handle: Black Painted
  Pedestal: Black Painted
  Keeper: Bright Chrome Plated
  Force Plate: Bright Chrome Plated
  Round Bush: Bright Chrome Plated

Application
- Oven, Test chamber, Environmental test equipment and other cabinets

Date of delivery
- Common product inquiry is welcome

Remark
- The stainless steel rod need to buy additionally, suggest to choose outer diameter of Φ22mm and thickness of 1.2-2.0mm

订货号 Item No.		重量(g) Weight:(g)
SK1-500-B	2D	1360
SK1-500-1	2D	704
SK1-500-2	2D	300


●:RoHS对应产品　▲:RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


竖式把手 Compression Latch

SK1-233



[SK1-233] [SK1-233B]

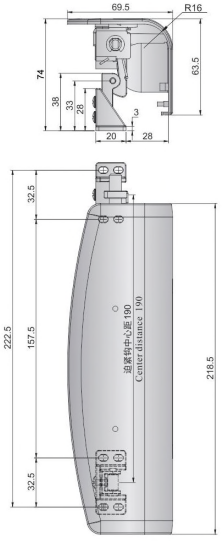

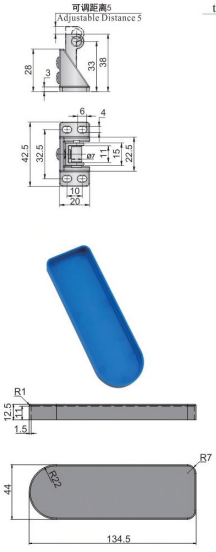

[SK1-233-16]
选配铰链上护盖
Protection cover (not supplied)

特点

- 采用碰撞式关门方式，开门的时候掰一下护盖内的把手即可实现开门功能，门锁是上下锁点联动结构
- 配件座高度可根据需要进行调节，另配有门锁护盖，护盖颜色可根据箱体颜色定制（护盖内R角已定好，选型之前需参考3D，看R角是否契合）

规　格　● 材　　质：不锈钢(SUS304)+树脂(ABS)
　　● 表面处理：不锈钢本色+蓝色或黑色
用　途　● 用于小型密闭箱体、试验箱体、烤箱等
交货期　● 常规产品. . .敬请垂询

Features

- Impacting to close, pushing to open
- Multi-point systems, base height can be adjusted
- With cover(the color can be customized)

Specification

- Material: Stainless Steel (SUS304) + ABS
- Finish: Natural+Blue or Natural+Black

Application

- Test chamber; Environmental testing equipment; Oven; etc.


Date of delivery

- Common products inquiry is welcome


Remark

- Please refer to 3D before selecting the model to check the R

安装示意
Installation Drawing



安装示意
Installation Drawing




订货号 Item No.		重量(g) Weight:(g)
SK1-233B	●	385
SK1-233	●	385
选配: SK1-233-16	●	/

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

密闭联动把手 Handle Latch

SK1-621

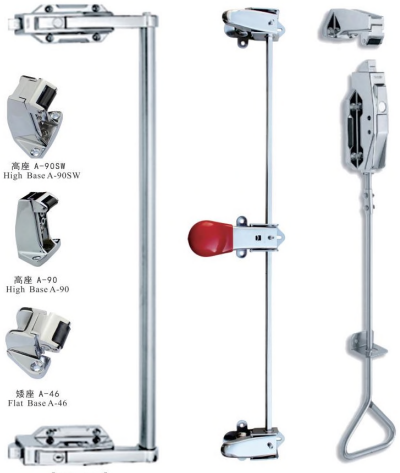

[SK1-621] [SK1-621S] [SK1-622S] [SK1-623S]

特点

- 通过连接钢管，可同步操作大型门的两处锁点

规　格　● 材　　质：锌合金(ZDC)或不锈钢(SUS304)
　　● 表面处理：镀亮铬、镜面抛光/振动研磨
用　途　● 组合式冷冻冷藏库、步入式冷冻冷藏库及步入式实验箱等
交货期　● 常规产品. . .敬请垂询
备　注　● 座子可配高座或者矮座
　　● SK1-621/SK1-621S自配不锈钢把手连杆，外径 Φ26mm，壁厚1.2-1.0mm，建议长度不大于500mm
　　● SK1-622S需自配10*10mm方钢.如需内开逃生装置，请咨询客服

Features

- Synchronized operating two latching points of the large-scale door by connecting tube

Specification

- Material: Zinc Alloy(ZDC) or Stainless Steel(SUS304)
- Finish: Bright Chrome Plated, Bright Polishing Vibration Grinding

Application


- Combined freezer; Walk-in freezer; Walk-in chamber; etc.

Date of delivery


- Common products inquiry is welcome

Remark


- Tall or short base height can be chosen
- SK1-621/SK1-621S Outer diameter Φ26mm and thickness 1.2-1.0mm stainless steel tube needs to buy additionally, recommended the length is not more than 500mm
- SK1-622S :10*10mm steel tube need to buy additionally , please consult us If need the escape device that opens from the inside.




[SK1-621+A-90SW]



[SK1-621+A-46]




[SK1-621+A-90]







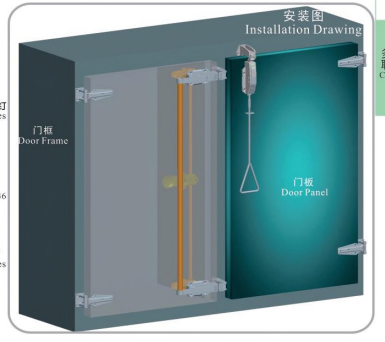


配件订货号 Accessory No.		材质 Material	重量(g) Weight:(g)
A-46	2D	锌合金 Zinc alloy	279
A-90	2D	锌合金 Zinc alloy	487
A-46S	2D	不锈钢 Stainless steel	323
A-90S	2D	不锈钢 Stainless steel	506
A-90SW	2D	不锈钢 Stainless steel	587


订货号 Item No.		材质 Material	表面处理 Finish	重量(g) Weight:(g)
SK1-621	2D	锌合金 Zinc alloy	镀亮铬 Bright Chrome Plated	2200
SK1-621S	2D	不锈钢 Stainless steel	镜面抛光 Bright Polishing	2580
SK1-622S	2D	不锈钢 Stainless steel	振动研磨 Vibration Grinding	970
SK1-623S	2D	不锈钢 Stainless steel	镜面抛光 Bright Polishing	1358


● :RoHS对应产品　▲ :RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


SK1-621S/622S/623S













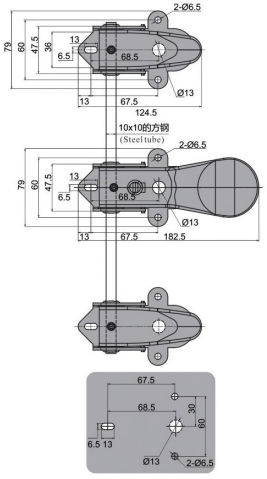

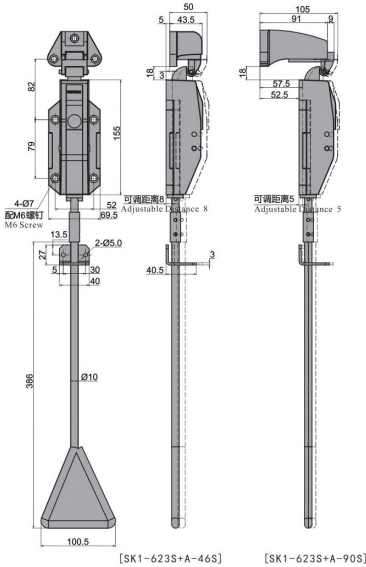

[SK1-622S] [SK1-623S+A-46S] [SK1-623S+A-90S]

滚轮迫紧式把手 Compression Handle

SK1-835/836/837



[SK1-836LX]
侧面三点锁紧（左装型）
Three-point locking on the side
(Left side installation type)

[SK1-837RX]
上下两点锁紧（右装型）
Locking up and down
(Right side installation type)

特点

- 内外开门兼用
- 具有强力迫紧功能
- 杠杆原理使门的开启与关闭更轻松

规　格 ● 材　　质：不锈钢(SUS304)
● 表面处理：镜面抛光
用　途 ● 大型冷库、步入式试验箱、隔音箱等大型有密闭需求的门
交货期 ● 常规产品. . .敬请垂询
备　注 ● 有平门和凸门两种安装座子可选
● 自配不锈钢圆管，内径Φ11mmΦ外径14mm

Features
- Suitable for inside and outside opening
- With strong compression force function
- The lever principle makes opening and closing the door easier

Specification
- Material: Stainless Steel(SUS304)
- Finish: Bright Polishing

Application
- Big freezing equipment; Walk-in chamber; Soundproof box and other cabinets; etc.

Date of delivery
- Common product inquiry is welcome


Remark
- Flat or tumbler door installation base can be chosen
- The stainless steel rod need to buy additionally, suggest to choose inside diameter of Φ11mm and outer diameter of Φ14mm




[SK1-835RX]



背装式迫紧座
Base
1-836-9A




截面 A-A
Section A-A







隐藏式迫紧座
Base
1-836-9B





截面 A-A
Section A-A






可调节隐藏式迫紧座
Base
1-836-9C







SK1-835/836/837




1-836RX-C





1-837RX-C




1-837RX-D









1-836RX-A



1-837X-B-836

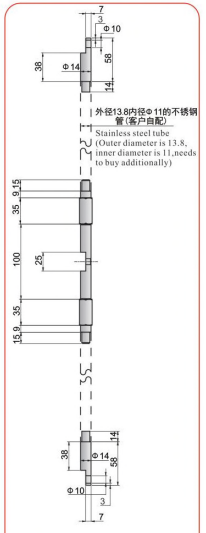

配件组：1-836X-E
Accessories set: 1-836X-E




订货号 Item No.		锁闭结构 Locking structure	重量(g) Weight:(g)
SK1-835LX	2D	侧面单点锁紧 One-point locking on the side	6068
SK1-835RX	2D	侧面单点锁紧 One-point locking on the side	6068

●:RoHS对应产品 ▲:RoHS可对应产品

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

SK1-836

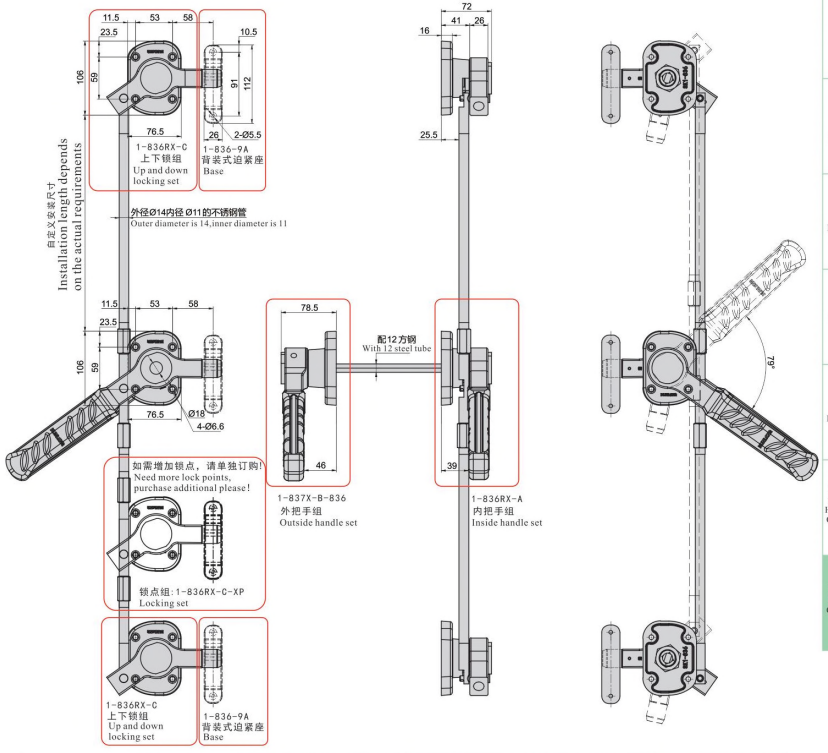

订货号 Item No.		配件型号 Item No.	把手/锁组 Type	配件数量 Quantity	重量(g) Weight:(g)
SK1-836LX 重量(g)：9500 锁闭结构：左装三点锁紧 SK1-836LX Weight(g):9500 Locking structure: Three-point locking on the side	2D	1-836LX-A	内把手组 Inside handle set	1	//
	2D	1-836LX-C	上下锁组 Up and down locking set	2	//
	2D	1-837X-B-836	外把手组 Outside handle set	1	//
	2D	1-836X-D	配件组 Accessories set	1	//
	2D	1-836X-E	配件组 Accessories set	1	//
	2D	1-836-9A	背装式迫紧座 Base	3	//
	2D	1-836-9B	三选一 Choose one 隐藏式迫紧座 Base	3	//
	2D	1-836-9C	可调节隐藏式迫紧座 Base	3	//

订货号 Item No.		配件型号 Item No.	把手/锁组 Type	配件数量 Quantity	重量(g) Weight:(g)
SK1-836RX 重量(g)：9500 锁闭结构：右装三点锁紧 SK1-836RX Weight(g):9500 Locking structure: Three-point locking on the side	2D	1-836RX-A	内把手组 Inside handle set	1	//
	2D	1-836RX-C	上下锁组 Up and down locking set	2	//
	2D	1-837X-B-836	外把手组 Outside handle set	1	//
	2D	1-836X-D	配件组 Accessories set	1	//
	2D	1-836X-E	配件组 Accessories set	1	//
	2D	1-836-9A	背装式迫紧座 Base	3	//
	2D	1-836-9B	三选一 Choose one 隐藏式迫紧座 Base	3	//
	2D	1-836-9C	可调节隐藏式迫紧座 Base	3	//

●:RoHS对应产品 ▲:RoHS可对应产品


● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

锁点组订货号 Item No.	安装方向 Fixed with welding		重量(g) Weight:(g)
1-836LX-C-XP	左装 Left	2D	//
1-836RX-C-XP	右装 Right	2D	//

如需增加锁点，请单独订购!
Need more lock points, purchase additional please!


SK1-836 安装示意图

安装示意(箱体外部)
Installation Drawing(Outside)

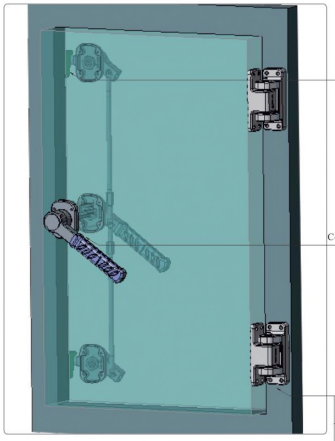


[SK1-836RX]+[1-836-9A]

安装示意(箱体内部)
Installation Drawing(Inner)

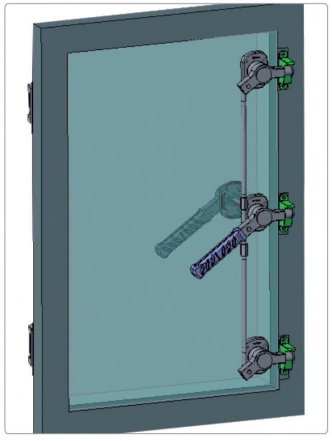


[SK1-836RX]+[1-836-9A]

安装示意(箱体外部)
Installation Drawing(Outside)

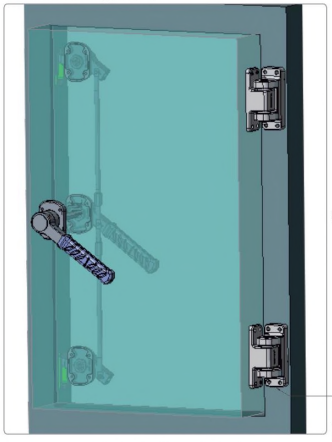


[SK1-836RX]+[1-836-9B]

安装示意(箱体内部)
Installation Drawing(Inner)

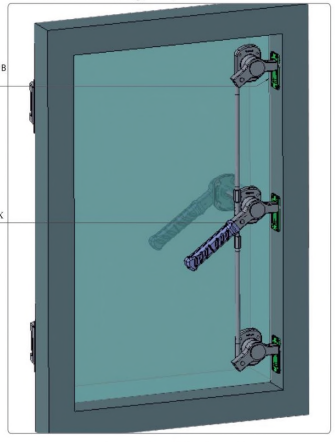

[SK1-836RX]+[1-836-9B]

SK1-837

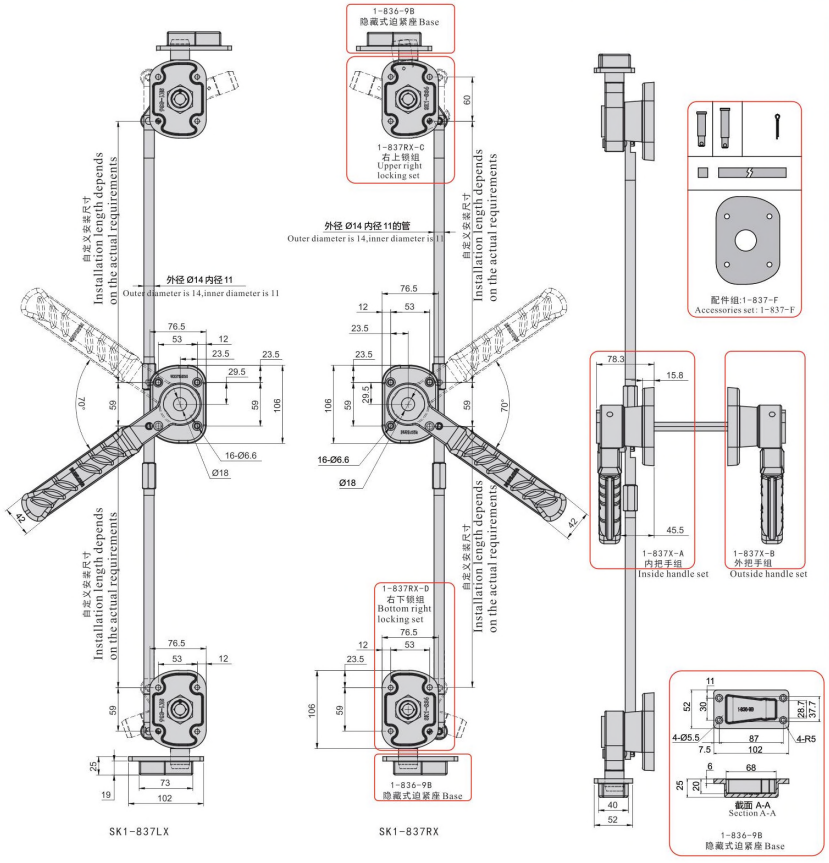

订货号 Item No.		配件型号 Item No.	把手/锁组 Type	配件数量 Quantity	重量(g) Weight(g)
SK1-837LX 重量(g)：10750 锁闭结构：上下两点锁紧 SK1-837LX Weight(g):10750 Locking structure: Locking up and down	2D	1-837X-A	内把手组 Inside handle set	1	//
	2D	1-837X-B	外把手组 Outside handle set	1	//
	2D	1-837LX-C	左上锁组 Upper left locking set	1	//
	2D	1-837LX-D	左下锁组 Bottom left locking set	1	//
	2D	1-836X-E	配件组 Accessories set	1	//
	2D	1-837-F	配件组 Accessories set	1	//
	2D	1-836-9B	隐藏式迫紧座 Base	2	//


订货号 Item No.		配件型号 Item No.	把手/锁组 Type	配件数量 Quantity	重量(g) Weight(g)
SK1-837RX 重量(g)：10750 锁闭结构：上下两点锁紧 SK1-837RX Weight(g):10750 Locking structure: Locking up and down	2D	1-837X-A	内把手组 Inside handle set	1	//
	2D	1-837X-B	外把手组 Outside handle set	1	//
	2D	1-837RX-C	右上锁组 Upper right locking set	1	//
	2D	1-837RX-D	右下锁组 Bottom right locking set	1	//
	2D	1-836X-E	配件组 Accessories set	1	//
	2D	1-837-F	配件组 Accessories set	1	//
	2D	1-836-9B	隐藏式迫紧座 Base	2	//

● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS


● : RoHS对应产品 ▲ : RoHS可对应产品

SK1-837安装示意图

安装示意(箱体外部)
Installation Drawing(Outside)

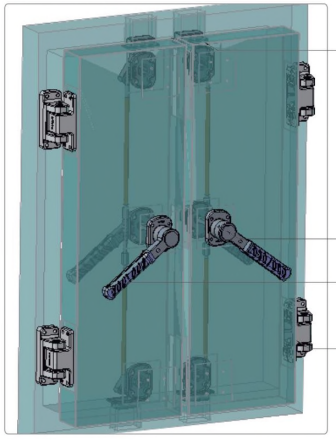

安装示意(箱体内部)
Installation Drawing(Inner)

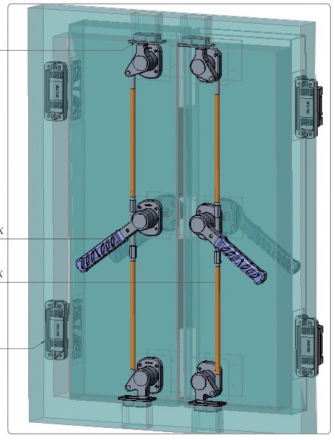

迫紧座1-836-9B
Base1-836-9B

滚轮迫紧把手SK1-837RX
Compression HandleSK1-837RX

滚轮迫紧把手SK1-837LX
Compression HandleSK1-837LX

可以选装以下铰链：
You can choose below hinges

重型铰链SK2-720
Heavy duty hingeSK2-720

重型铰链SK2-721
Heavy duty hingeSK2-721


重型铰链SK2-722
Heavy duty hingeSK2-722

重型铰链SK2-723
Heavy duty hingeSK2-723


重型铰链SK2-724
Heavy duty hingeSK2-724

不锈钢连杆式天地锁 Multi-Point Lock

SK1-839

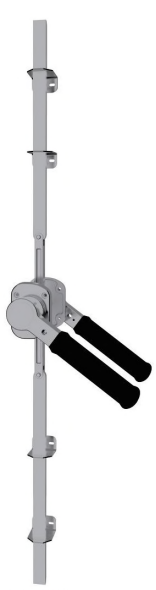

[SK1-839]

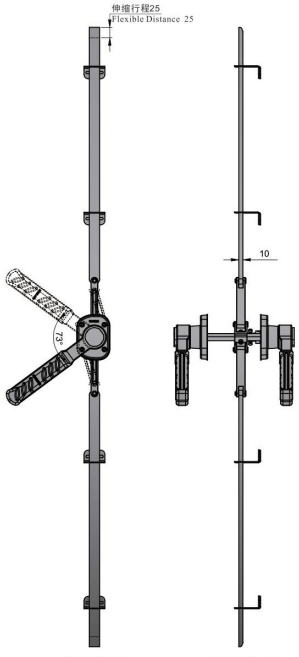

[SK1-839-DK]

[SK1-839-SK]

特点

- 内外把手联动通过中间方钢连接，与方钢一起转动，连动块装配在方钢上，带动连杆与锁杆运动，实现天地锁杆功能
- 另上下锁杆支架尺寸根据客户需要自行定义，天地锁的行程25mm，在外观上实现隐藏式天地锁

规　格 ●材　　质:不锈钢(SUS304)把手，中间连动块(SUS304)
●表面处理:外把手镜面抛光，手柄部分包胶
用　途 ● 烤箱、试验箱、环境试验设备等箱体
交货期 ● 常规产品...敬请垂询
备　注 ● 自配方杆，厚度10*25mm连杆
● 不含支架，客户需自配

Features

- The inner and outer handle linkage are connected through the actuator and rotated together. The fixed point rod is mounted on the actuator, which drives the fixed point rod and the linear rod to rotate together, so as to realize the multi-point lock function.
- The fixed point rod is defined according to customer needs, its distance is 25mm,and with a hidden effect.

Specification

- Material: Handle: Stainless Steel (SUS304), Actuator: Stainless Steel (SUS304)
- Finish: Bright polishing and covered with anti-vibration rubber

Application


- Oven; Test chamber; Environmental testing equipment; etc.


Date of delivery


- Common products inquiry is welcome.

Remark

- The rod needs to buy additionally, suggest to choose thickness of 10*25mm.
- The brackets need to buy additionally.







订货号 Item No.	2D	RoHS	把手组 Type	重量(g) Weight(g)
SK1-839-SK	2D	●	双开把手组 Inner and outer handle linkage	//
SK1-839-DK	2D	●	单开把手组 Single handle	//

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

外露式天地锁 Compression Handle

NEW RoHS 不锈钢 CAD 环保型

SK1-840



[SK1-840]

特点

- 不锈钢材质，耐腐蚀性能好
- 最大行程47mm，开启角度70度

规　格 ● 材　　质：不锈钢(SUS304)+铝合金支架
　　● 表面处理：镜面抛光
用　途 ● 冷库、步入式试验箱、隔音箱等大型有密闭需求的门
交货期 ● 常规产品…敬请垂询
备　注 ● 左右开门兼用
　　● 自配锁杆，厚度10*25mm连杆或外径18的圆杆

Features

- Stainless Steel material, great corrosion resistance performance
- Maximum flexible distance is 47mm, 70 degrees opening angle

Specification

- Material:Stainless Steel (SUS304)+ Aluminum alloy bracket
- Finish: Bright Polishing

Application


- Big freezing equipment; Walk-in chamber; Soundproof box and other cabinets; etc.


Date of delivery


- Common product inquiry is welcome

Remark

- Suitable for left and right side opening
- The connecting rod need to buy additionally, suggest to choose thickness of 10*25mmand outer diameter 18



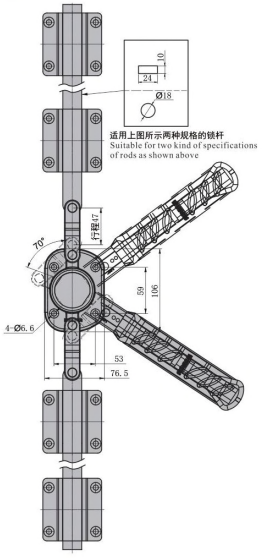

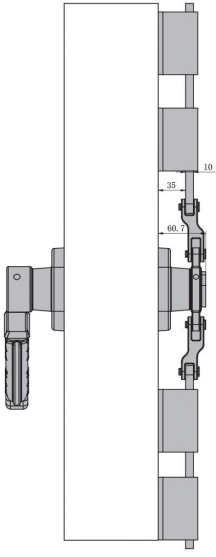

订货号 Item No.	2D	RoHS	重量(g) Weight:(g)
SK1-840	2D	●	4700

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


密闭联动把手 Handle Latch

RoHS CAD 环保型

SK1-1937X



[SK1-1937X]



[SK1-1937KX]

特点

- 迫紧性能强，把手联动效果佳
- 迫紧行程最大20mm，可调节范围12mm
- 左右开门兼用

规　格 ● 材　　质：锌合金（ZDC）
　　● 表面处理：烤漆黑色
用　途 ● 环境测试箱体、检测设备
交货期 ● 常规产品…敬请垂询
备　注 ● 自配不锈钢把手连杆，外径Φ25mm，壁厚1.0mm，建议长度不大于500mm

Features

- Strong compression force,connect rod operate well
- The Max compression distance is 20mm,adjustable range is 12mm
- Suitable for left and right side opening

Specification

- Material: Zinc Alloy(ZDC)
- Finish: Black Painted

Application


- Environmental test equipment;Test equipment; etc.


Date of delivery


- Common product inquiry is welcome

Remark


- Outer diameter Φ25mm and thickness 1.0mm stainless steel tube needs to buy additionally, recommended the length is not more than 500mm








外径Ø25 (Outer Diameter Φ25)
内径Ø23 (Inner Diameter Φ23)




[SK1-1937KX]

外径Ø25 (Outer Diameter Φ25)
内径Ø23 (Inner Diameter Φ23)



[SK1-1937X]



订货号 Item No.	RoHS	2D	钥匙 Key	重量(g) Weight:(g)
SK1-1937X	●	2D	无钥匙 No	2000
SK1-1937KX	●	2D	有钥匙 Yes	2000

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

密闭联动把手 Handle Latch

SK1-902





特点

- 具有压缩迫紧功能
- 通过连接钢管，可同步操作门的两处锁点

规　格 ● 材　　质：锌合金(ZDC)
　　● 表面处理：镀亮铬
用　途 ● 医药保存箱、低温保存箱、商厨设备等小型箱体设备
交货期 ● 常规产品. . .敬请垂询
备　注 ● 自配不锈钢把手连杆，外径Φ20mm，壁厚2. 0mm，建议长度不大于400mm

Features

- With compression and pressing function
- Can synchronized operating two latching points of the door by connecting pipe

Specification

- Material: Zinc Alloy (ZDC)
- Finish: Bright Chrome Plated

Application


- Medicine storage box , Cryopreservation cabinet, Kitchen equipment and other Small box equipment


Date of delivery


- Common product inquiry is welcome

Remark

- Outer diameter Φ20mm and thickness 2.0mm stainless steel tube needs to buy additionally, recommended the length is not more than 400mm

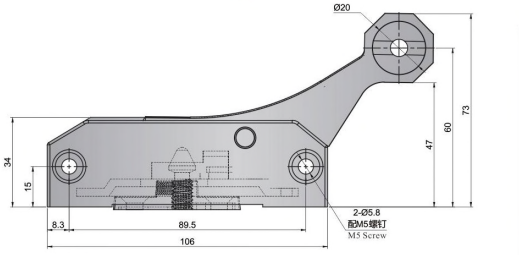




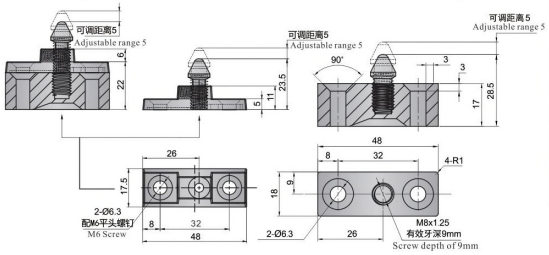


固定座有两种高度可选配
Two height bases can be choosen

冷冻冷库使用示例
Freezers sing sample



烘箱、微波炉等前盖用使用例
Oven microwave front cover using case



订货号 Item No.	包	重量(g) Weight(g)
SK1-902	2D	454
SK1-902-8HDD	2D	49

● :RoHS对应产品　▲ :RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

密闭联动把手 Handle Latch

SK1-903S







特点

- 具有压缩迫紧功能
- 通过连接钢管，可同步操作大型门的两处锁点
- 调节座有两种高度可选
- 不锈钢材质，耐腐蚀性能好

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 组合式冷冻冷藏库、步入式冷冻冷藏库及步入式实验箱等
交货期 ● 常规产品. . .敬请垂询
备　注 ● 自配不锈钢把手连杆，外径Φ30mm，壁厚1. 0-1. 5mm，建议长度不大于500mm
　　● 可以选用三联动的把手(1-903S-T)

Features

- With strong compression force function
- Synchronized operating two latching points of the large-scale door by connecting pipe
- With height and flat base can be chosen
- Stainless Steel material, great corrosion resistance performance

Specification

- Material:Stainless Steel(SUS304)
- Finish:Bright Polishing

Application

- Combined freezer;Walk-in freezer;Walk-in test chamber


Date of delivery


- Common product inquiry is welcome

Remark


- Outer diameter Φ30mm and thickness 1.0-1.5mm stainless steel tube needs to buy additionally, recommended the length is not more than 500mm
- Three linkage effects can be achieved, adding 1pc 1-903S-T


[SK1-903S]
Patent No.: ZL 2016 2 0568586.6





调节座开孔尺寸
Base installation size
[A-90S-903]

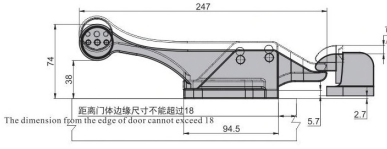





调节座开孔尺寸
Base installation size
[A-46S-903]


订货号 Item No.	包	重量(g) Weight(g)
SK1-903S	2D	2840
A-46S-903	2D	695
A-90S-903	2D	1268
1-903S-T	2D	1259

● :RoHS对应产品　▲ :RoHS可对应产品
▲ Refers to the replaceable product instructed by RoHS
● Refers to the product instructed by RoHS



圆球压力测试
Ball-pressure Test

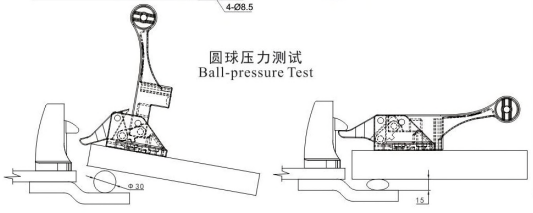




圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

迫紧门把手 Handle Latch

SK1-903S-B

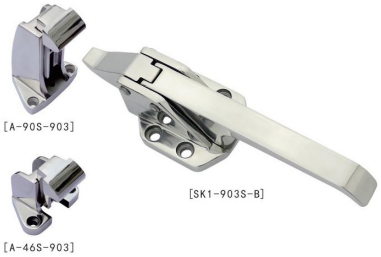

特点

- 具有压缩迫紧功能
- 20万次的疲劳测试
- 轻松开启负压门
- 调节座有两种高度可选

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 屏蔽箱、试验箱、烤箱等、工业设备等
交货期 ● 常规产品，敬请垂询
备　注 ● 可定制拉丝抛光、电解抛光等表面处理

Features

- With strong compression force function
- The testing of opening and closing function for 200,000 times
- Easily open the negative pressure door
- With height and flat base can be chosen

Specification

- Material: Stainless Steel(SUS304)
- Finish:Bright Polishing

Application


- Shielded cabinet; Testing box; Oven; Industrial equipment;etc.


Date of delivery


- Common product inquiry is welcome


Remark


- Wire-drawing polishing and electro polishing finish can be customized

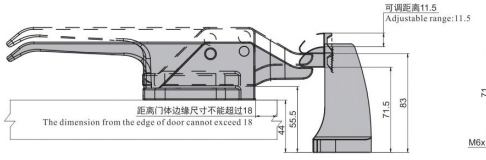








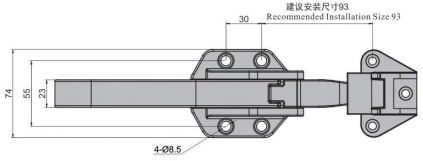




订货号 Item No.		重量(g) Weight:(g)
SK1-903S-B	2D	1244
A-46S-903	2D	348
A-90S-903	2D	634

● : RoHS对应产品　▲ : RoHS可对应产品
● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

货柜锁 Container Latch

SK1-1593S



特点

- 不锈钢材质，耐腐蚀性能好
- 外表面安装型产品，安装及保养非常简单
- 手握部分包胶处理，握感舒适
- 开关门轻松、方便，锁内有减震设计，防止弹伤手指

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 特种车辆、大型试验设备、冷藏保鲜车
交货期 ● 常规产品，敬请垂询
备　注 ● 左右兼用型
　　● 自配不锈钢圆管,选配内孔径 Φ28mm或 Φ20mm

Features

- Stainless Steel material, great corrosion resistance performance
- Outer surface mount products,installation and maintenance is very simple
- Handlewrapped with rubber,comfortable grip
- Easy to open and close the door, inner with dumping design, prevent to injure finger

Specification

- Material: Stainless Steel (SUS304)
- Finish:Bright Polishing

Application


- Special vehicle; Big testing equipment; Refrigerate truck;


Date of delivery

- Common product inquiry is welcome

Remark

- Suitable for left and right side opening.
- The stainless steel rod need to buy additionally, suggest to choose inside diameter of Φ28mm or Φ20mm

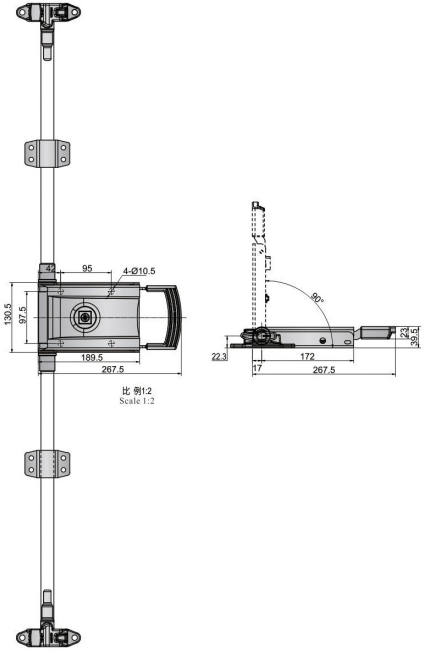

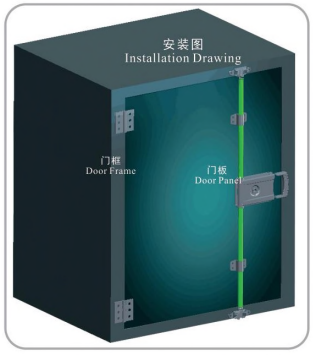


圆头锁 转舌锁 Cam Lock
平面锁 单点锁 Panel Lock
把手锁 Handle Lock
连杆锁 Multi-Point Lock
机罩锁 Paddle Latch
冷库把手 迫紧把手 Handle Latch Compression Handle
多点锁闭 联动把手 Compression Handle

货柜锁 Container Latch

SK1-1593S


[SK1-1593S-20GZ]


[SK1-1593S-28GZ]

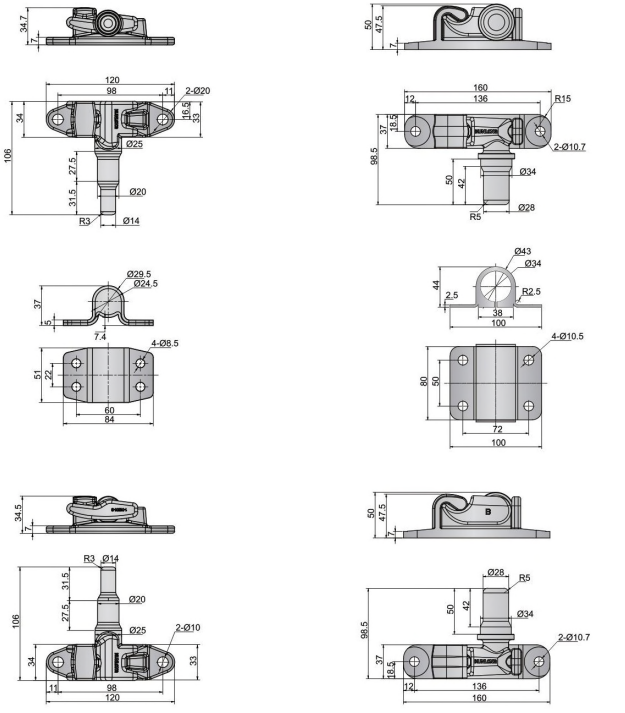

订货号 Item No.	D	RoHS	D	重量(g) Weight(g)
SK1-1593S-20GZ	2D	●	20	4330
SK1-1593S-28GZ	2D	●	28	5600

●:RoHS对应产品 ▲:RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

嵌入式密闭把手 Compression Handle

SK1-1894



[SK1-1894]


特点


- 嵌入式结构整体效果更美观
- 把手内部采用碰锁方式，单触即可实现开关
- 把手正面红色的指示器具有提醒操作者关门的功能，极具安全性

规　格 ● 材　　质：铝合金(ADC)
　　● 表面处理：烤漆银色
用　途 ● 中小型试验箱、冷藏保鲜车、特种设备等
交货期 ● 常规产品...敬请垂询
备　注 ● 自配不锈钢圆管,选配内孔径Φ21mm或Φ12mm
　　● 选配座请参考尺寸和订货号选配
　　● 如需增加内开逃生装置请咨询

Features
●The overall effect of embedded structure is more beautiful
●Internal using latch mode , the switch can be realized by single touch
●The front of the red indicator has the function to remind the operator to close the door, which is extremely safe.
Specification
●Material: Aluminium Alloy (ADC)
●Finish: Silver Painted
Application
●Test Chamber, Refrigerated Truck, Special Vehicle, etc.
Date of delivery
●Common product inquiry is welcome
Remark
●The stainless steel rod need to buy additionally, suggest to choose inside diameter of Φ21mm or Φ12mm
●Please refer to the size and item number to choose the hook lock and hook base
●Please consult if you need internal escape device

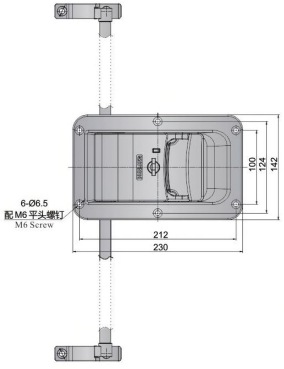







开孔尺寸
Opening Size

安装图
Installation Drawing



选配件
Accessory


内开逃生装置
[A-1894-NK]

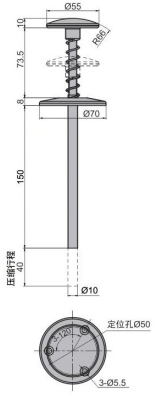

订货号 Item No.	D	连杆直径 Connecting rod diameter	重量(g) Weight(g)	选配座子 Optional Base
SK1-1894-21S	2D	Φ21	2340	SK1-1815S-1
SK1-1894-12S	2D	Φ12	2020	SK1-1815S-5
	2D	Φ12		SK1-1815S-7

●:RoHS对应产品 ▲:RoHS可对应产品
● Refers to the product instructed by RoHS ▲ Refers to the replaceable product instructed by RoHS

嵌入式密闭把手Compression Handle

NEW RoHS CAD

SK1-1895-12S



[SK1-1895-12S]

特点

- 嵌入式结构，整体更美观
- 把手内部采用碰锁方式，单触即可实现开关
- 把手正面的黄色指示器具有提醒操作者关门功能，极具安全性

规　格 ● 材　　质：铝合金(ADC12)
● 表面处理：烤漆银色
用　途 ● 中小型试验箱、冷库保鲜箱、特种设备等
交货期 ● 常规产品…敬请垂询
备　注 ● 左右开门兼用

Features

- The overall effect of embedded structure is more beautiful
- Internal using latch mode, the switch can be realized by single touch
- The front of the yellow indicator has the function to remind the operator to close the door, which is extremely safe

Specification

- Material:Aluminum Alloy (ADC)
- Finish: Silver Painted

Application


- Test chamber; Refrigerated truck; Special vehicle; etc.

Date of delivery

- Common product inquiry is welcome

Remark

- Suitable for left and right side opening

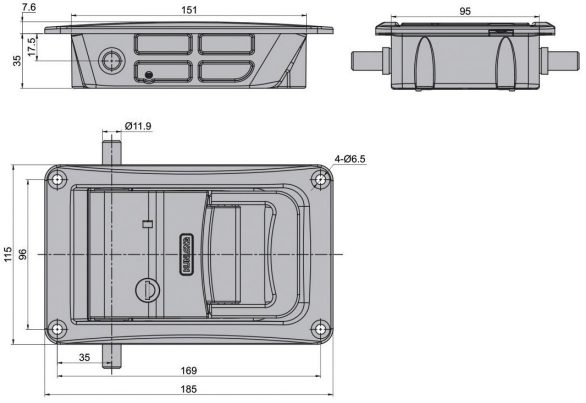

配件订货号 Accessory No.	CAD	连杆直径 Connecting rod diameter	重量(g) Weight(g)
SK1-1815S-5	2D	Φ12	480
SK1-1815S-7	2D	Φ12	453

订货号 Item No.	CAD	RoHS	重量(g) Weight(g)
SK1-1895-12S	2D	●	1450

●:RoHS对应产品　▲:RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS


选配座子Optional Base

RoHS CAD

SK1-1815S




[SK1-1815S-1]

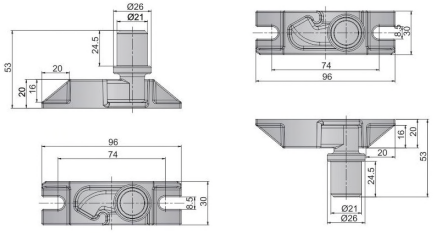

[SK1-1815S-1]




[SK2-1815S-5]

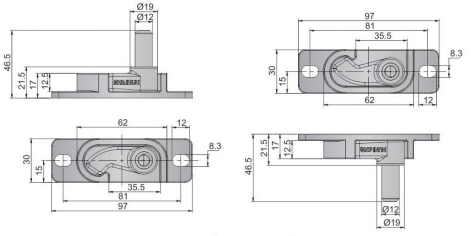

[SK2-1815S-5]



[SK1-1815S-7]

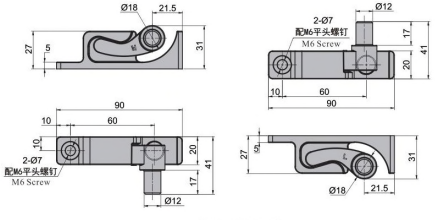

[SK1-1815S-7]

订货号 Item No.	CAD	连杆直径 Connecting rod diameter	重量(g) Weight(g)
SK1-1815S-1	2D	Φ21	//
SK1-1815S-5	2D	Φ12	480
SK1-1815S-7	2D	Φ12	453

●:RoHS对应产品　▲:RoHS可对应产品


● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

货柜锁 Container Latch

SK1-16C03S



[SK1-16C03S]

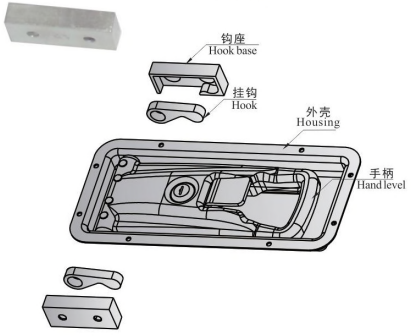

特点

- 带锁芯可锁定不被弹开
- 具有强力扣紧功能
- 不锈钢材质，耐腐蚀性能好
- 手柄包胶工艺，握感舒适

规　格 ● 材　　质：不锈钢(SUS304)
　　● 表面处理：镜面抛光
用　途 ● 特种装备车、冷冻车、制冷车
交货期 ● 常规产品. . . 敬请垂询
备　注 ● 联动杆根据实际所需长度自行配置

Features

- Cylinder latching without bounce
- With strong compression force function
- Stainless Steel material, great corrosion resistance performance
- Covered with rubber, comfort grip

Specification

- Material: Stainless Steel (SUS304)
- Finish: Bright Polishing

Application

- Container car; Truck; Refrigerated truck; Special vehicle

Date of delivery

- Common product inquiry is welcome


Remark


- The length of linkage rod as your requirements


安装示意
Installation Drawing











开孔尺寸
Opening Size

订货号 Item No.		重量(g) Weight:(g)
SK1-16C03S	2D	1580

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS

货柜锁 Container Latch

SK1-HG01



[SK1-HG01]

特点

- 带锁芯可锁定不被弹开，带锁钩可加挂锁
- 不锈钢材质，耐腐蚀性能好
- 手柄包胶工艺，握感舒适
- 多个保持座，让连杆安装更稳定

规　格 ● 材　　质：不锈钢(SUS304)把手，
　　中间连动块(SUS304)
　　● 表面处理：外把手镜面抛光，手柄部分包胶
用　途 ● 烤箱、试验箱、环境试验设备等箱体
交货期 ● 常规产品. . 敬请垂询
备　注 ● 自配不锈钢圆管.外径Φ20mm壁厚
　　1.2-1.5mm

Features

- With cylinder, it can be locked without being bounced, also padlock can be added
- Stainless Steel material, great corrosion resistance performance
- Covered with rubber, comfort grip
- Multiple holding bases, make the rod more stable

Specification

- Material: Stainless Steel (SUS 304)
- Finish: Bright Polishing

Application


- Container car; Truck; Refrigerated truck; Special vehicle; etc.


Date of delivery

- Common products inquiry is welcome

Remark

- The stainless steel rod need to buy additionally, suggest to choose outer diameter of Φ20mm and thickness of 1.2-1.5mm



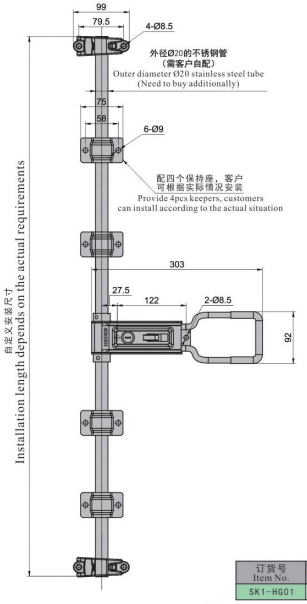

订货号 Item No.		重量(g) Weight:(g)
SK1-HG01	2D	2000

● :RoHS对应产品　▲ :RoHS可对应产品

● Refers to the product instructed by RoHS　▲ Refers to the replaceable product instructed by RoHS